





European P.C.B. type terminal blocks / EK series

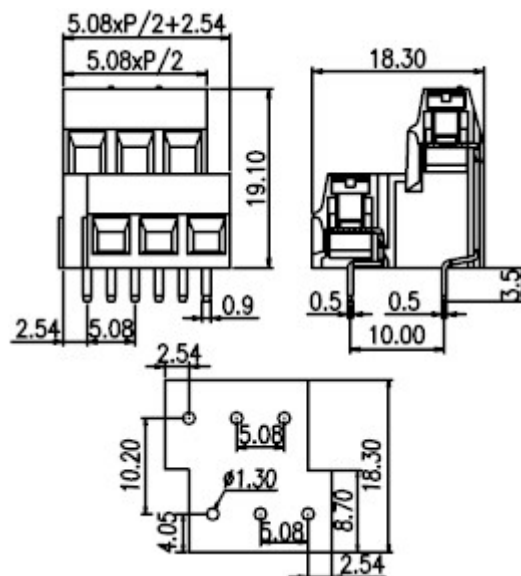

EELK508V-..P(B)

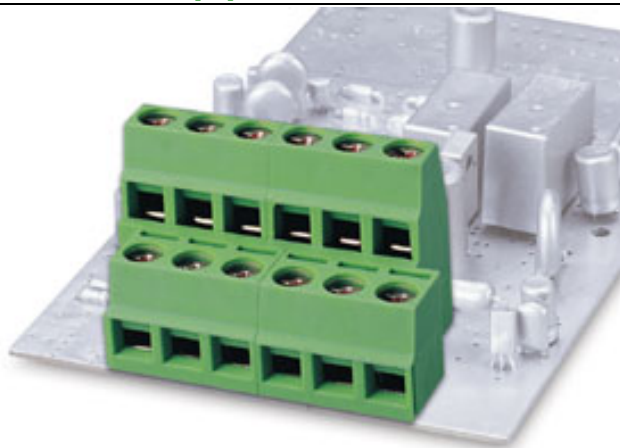

Pitch: 5.08mm

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	250V
Rated current	13.5A	14A
Wire range		1.5mm ²
Solid wire (AWG)	26~18	
Stranded wire (AWG/mm ²)	26~18	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 3 KV	
Torque (Lb-in)	5	
Screw	M2.5	
Wire strip length	6~7mm	
Pole	Cat. No.	
04	EELK508V-04P(B)	
:	:	
:	:	
32	EELK508V-32P(B)	