





Front entry type terminal blocks / DT-123 series

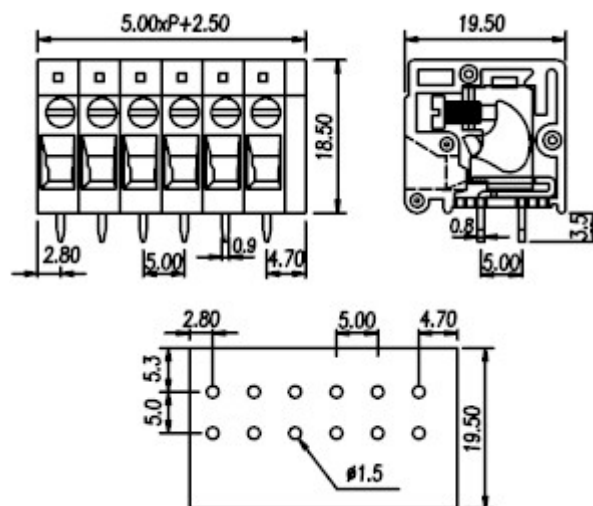

DT-123RA

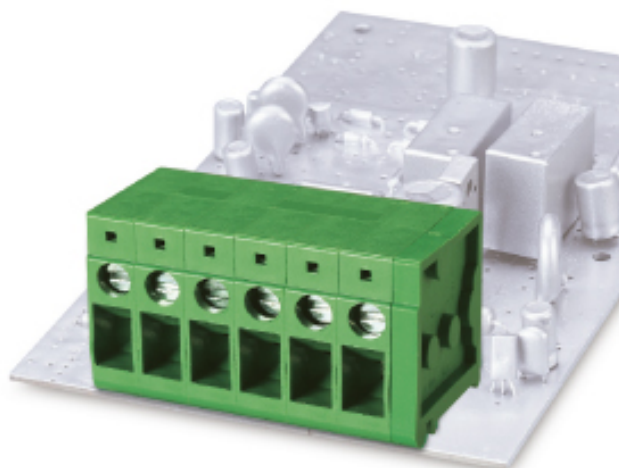

Pitch: 5.00mm

Approval	 	
Technical Data	UL	IEC
Rated voltage	300V	750V
Rated current	20A	24A
Wire range		2.5mm ²
Solid wire (AWG)	22~12	
Stranded wire (AWG/mm ²)	22~12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2 / 3 KV	
Torque (Lb-in)	4.5	
Screw	M2.5	
Wire strip length	13~15mm	
Pole	Cat. No.	
02	DT-123RA-02P	
:	:	
:	:	
24	DT-123RA-24P	