



Pololu Micro Metal Gearmotors are available in 11 different gear ratios, from 5:1 up to 1000:1, and with five different motor options:

- **LP 6V:** Low-power 6 V with precious metal brushes
- **MP 6V:** Medium-power 6 V with precious metal brushes
- **HP 6V:** High-power 6 V with precious metal brushes
- **HPCB 6V:** High-power 6 V with long-life carbon brushes
- **HPCB 12V:** High-power 12 V with long-life carbon brushes




carbon
brushes




precious metal
brushes

Each motor is available with an optional extended rear motor shaft to allow for the addition of an encoder such as Pololu item #3081 Magnetic Encoder Pair Kit.

Dimensions of versions with carbon brushes (HPCB)

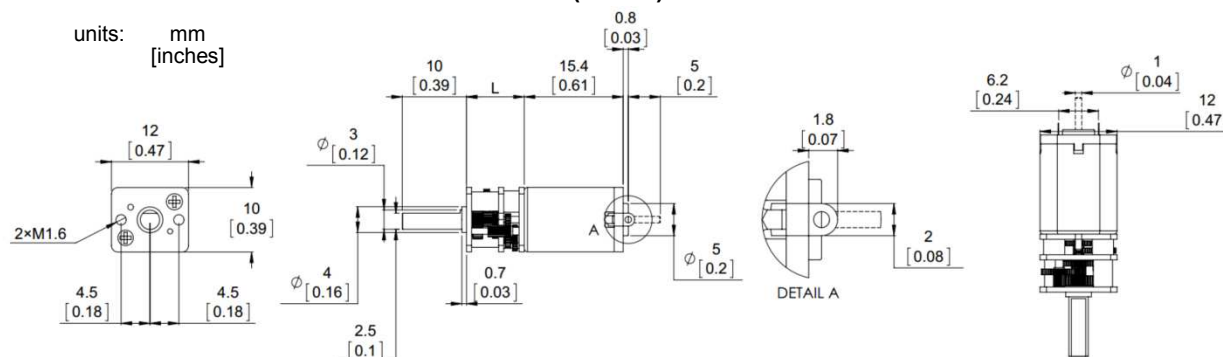

Dimensions of versions with precious metal brushes (HP, MP, LP)

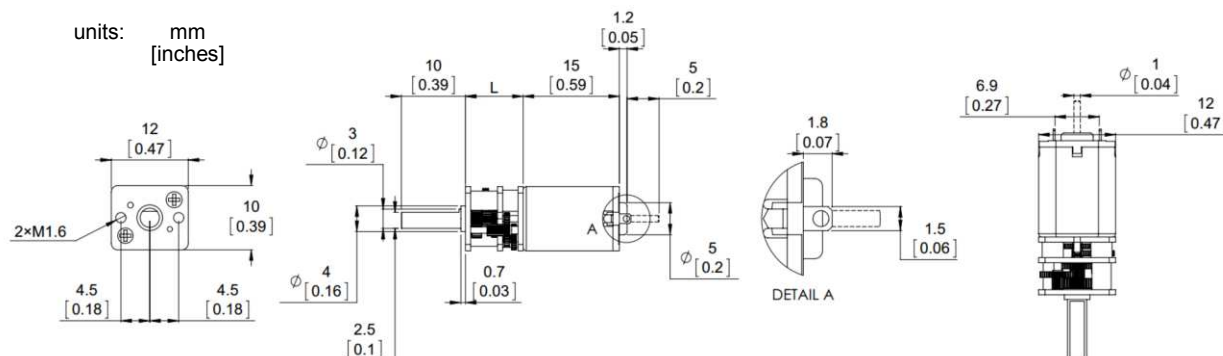

L = 9 mm [0.35 in] for all gear ratios except 1000:1. L = 12.5 mm [0.49 in] for the 1000:1 gear ratio. Max length for M1.6 mounting screws is 1.3 mm (from gearbox mounting surface). Approximate weight is 10 g.

Performance summary and table of contents


Motor Type	Rated Voltage	Pololu Item #	Gear Ratio	No Load		At Maximum Efficiency				Max Power	Stall Extrapolation		Graph Page
				Speed	Current	Speed	Torque	Current	Output		Torque	Current	
			:1	RPM	A	RPM	kg-mm	A	W	W	kg-mm	A	
Low-Power (LP 6V)	6 V	1100, 2200	4.995	2500	0.02						0.5	0.36	
		1099, 2201	9.96	1300							1.0		
		993, 2202	29.86	450		320	0.66	0.11	0.22	0.31	2.9		3
		1098, 2203	51.45	270		200	1.0	0.10	0.20	0.29	4.4		4
		2360, 2209	75.81	180		140	1.3	0.10	0.19	0.29	6.4		5
		992, 2204	100.37	130		100	1.7	0.10	0.17	0.25	7.4		6
		1097, 2205	150.58	90		67	2.6	0.11	0.18	0.25	11		7
		1096, 2206	210.59	65		46	4.1	0.12	0.19	0.25	16		8
		1095, 2207	248.98	54		39	4.2	0.11	0.17	0.23	17		9
		1094, 2208	297.92	45		34	4.4	0.09	0.15	0.22	20		10
		1596, 3058	986.41	13		10	12	0.09	0.12	*	55		11
Medium-Power (MP 6V)	6 V	2362, 2376	4.995	4400	0.04						0.6	0.67	
		2363, 2377	9.96	2200							1.1		
		2364, 2378	29.86	720		510	0.80	0.21	0.41	0.57	3.3		12
		2365, 2379	51.45	420		310	1.2	0.19	0.38	0.55	5.4		13
		2366, 2380	75.81	290		220	1.6	0.17	0.35	0.54	7.8		14
		2367, 2381	100.37	220		170	1.9	0.17	0.32	0.50	9.4		15
		2368, 2382	150.58	150		110	2.6	0.15	0.30	0.48	13		16
		2369, 2383	210.59	100		83	3.4	0.16	0.29	0.46	17		17
		2370, 2384	248.98	88		69	4.5	0.17	0.31	0.48	22		18
		2371, 2385	297.92	73		56	5.0	0.17	0.29	0.44	24		19
		2372, 3059	986.41	22		17	13	0.16	0.23	*	63		20
		1000, 2210	4.995	6100							1.1		
		999, 2211	9.96	3100		2300	0.46	0.42	1.1	1.6	2.2		21
High-Power (HP 6V)	6 V	1093, 2212	29.86	1000	0.07	830	1.0	0.36	0.89	1.5	5.7	1.6	22
		998, 2213	51.45	590		490	1.5	0.32	0.75	1.3	8.6		23
		2361, 2215	75.81	410		340	2.3	0.34	0.80	1.4	13		24
		1101, 2214	100.37	310		250	2.9	0.33	0.73	1.3	17		25
		997, 2386	150.58	210		170	3.9	0.31	0.68	1.2	24		26
		996, 2216	210.59	150		120	5.0	0.32	0.62	1.1	29		27
		995, 2217	248.98	120		100	5.5	0.30	0.59	1.1	34		28
		994, 2218	297.92	100		87	6.5	0.31	0.58	1.1	40		29
		1595, 2373	986.41	31		26	20	0.32	0.53	*	120		30
		3060, 3082	4.995	6500							0.9		
		3061, 3071	9.96	3300		2300	0.42	0.51	1.0	1.3	1.7		31
		3062, 3072	29.86	1100		840	1.0	0.43	0.85	1.2	4.5		32
High-Power, Carbon Brushes (HPCB 6V)	6 V	3063, 3073	51.45	650	0.10	490	1.6	0.42	0.80	1.2	7.4	1.5	33
		3064, 3074	75.81	430		330	2.5	0.43	0.87	1.3	11		34
		3065, 3075	100.37	330		260	3.3	0.44	0.86	1.3	16		35
		3066, 3076	150.58	220		170	4.1	0.39	0.73	1.1	20		36
		3067, 3077	210.59	160		120	5.9	0.40	0.74	1.1	28		37
		3068, 3078	248.98	130		100	6.6	0.40	0.71	1.1	32		38
		3069, 3079	297.92	110		85	7.4	0.42	0.65	1.0	34		39
		3070, 3080	986.41	33		26	22	0.39	0.59	*	110		40
		3036, 3047	4.995	6800							0.9		
		3037, 3048	9.96	3400		2500	0.43	0.25	1.1	1.5	1.7		41
High-Power, Carbon Brushes (HPCB 12V)	12 V	3038, 3049	29.86	1100	0.06	840	1.0	0.23	0.82	1.1	3.9	0.75	42
		3039, 3050	51.45	650		500	1.5	0.22	0.79	1.1	6.7		43
		3040, 3051	75.81	450		350	2.1	0.20	0.76	1.1	10		44
		3041, 3052	100.37	330		260	2.9	0.21	0.78	1.1	13		45
		3042, 3053	150.58	220		170	4.2	0.21	0.73	1.0	18		46
		3043, 3054	210.59	160		120	5.6	0.21	0.71	1.0	25		47
		3044, 3055	248.98	130		110	6.6	0.21	0.72	1.1	30		48
		3045, 3056	297.92	110		87	7.3	0.21	0.65	1.0	33		49
		3046, 3057	986.41	35		27	21	0.19	0.59	*	100		50

* Operating the 1000:1 gear ratios at maximum power is likely to damage the gearboxes.


Notes:

- 1) Max efficiency data and performance graphs currently unavailable for all 5:1 gear ratios and LP and MP 10:1 gear ratios.
- 2) Listed stall torques and currents are theoretical extrapolations; units will typically stall well before these points as the motors heat up. Stalling or overloading gearmotors can greatly decrease their lifetimes and even result in immediate damage. The recommended upper limit for instantaneous torque is 25 kg-mm for the 1000:1 gearboxes and 20 kg-mm for all other gear ratios; we strongly advise keeping applied loads well under these limits. Stalls can also result in rapid (potentially on the order of seconds) thermal damage to the motor windings and brushes, especially for the versions that use high-power (HP and HPCB) motors; a general recommendation for brushed DC motor operation is 25% or less of the stall current.


Pololu Items #993, #2202 (30:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

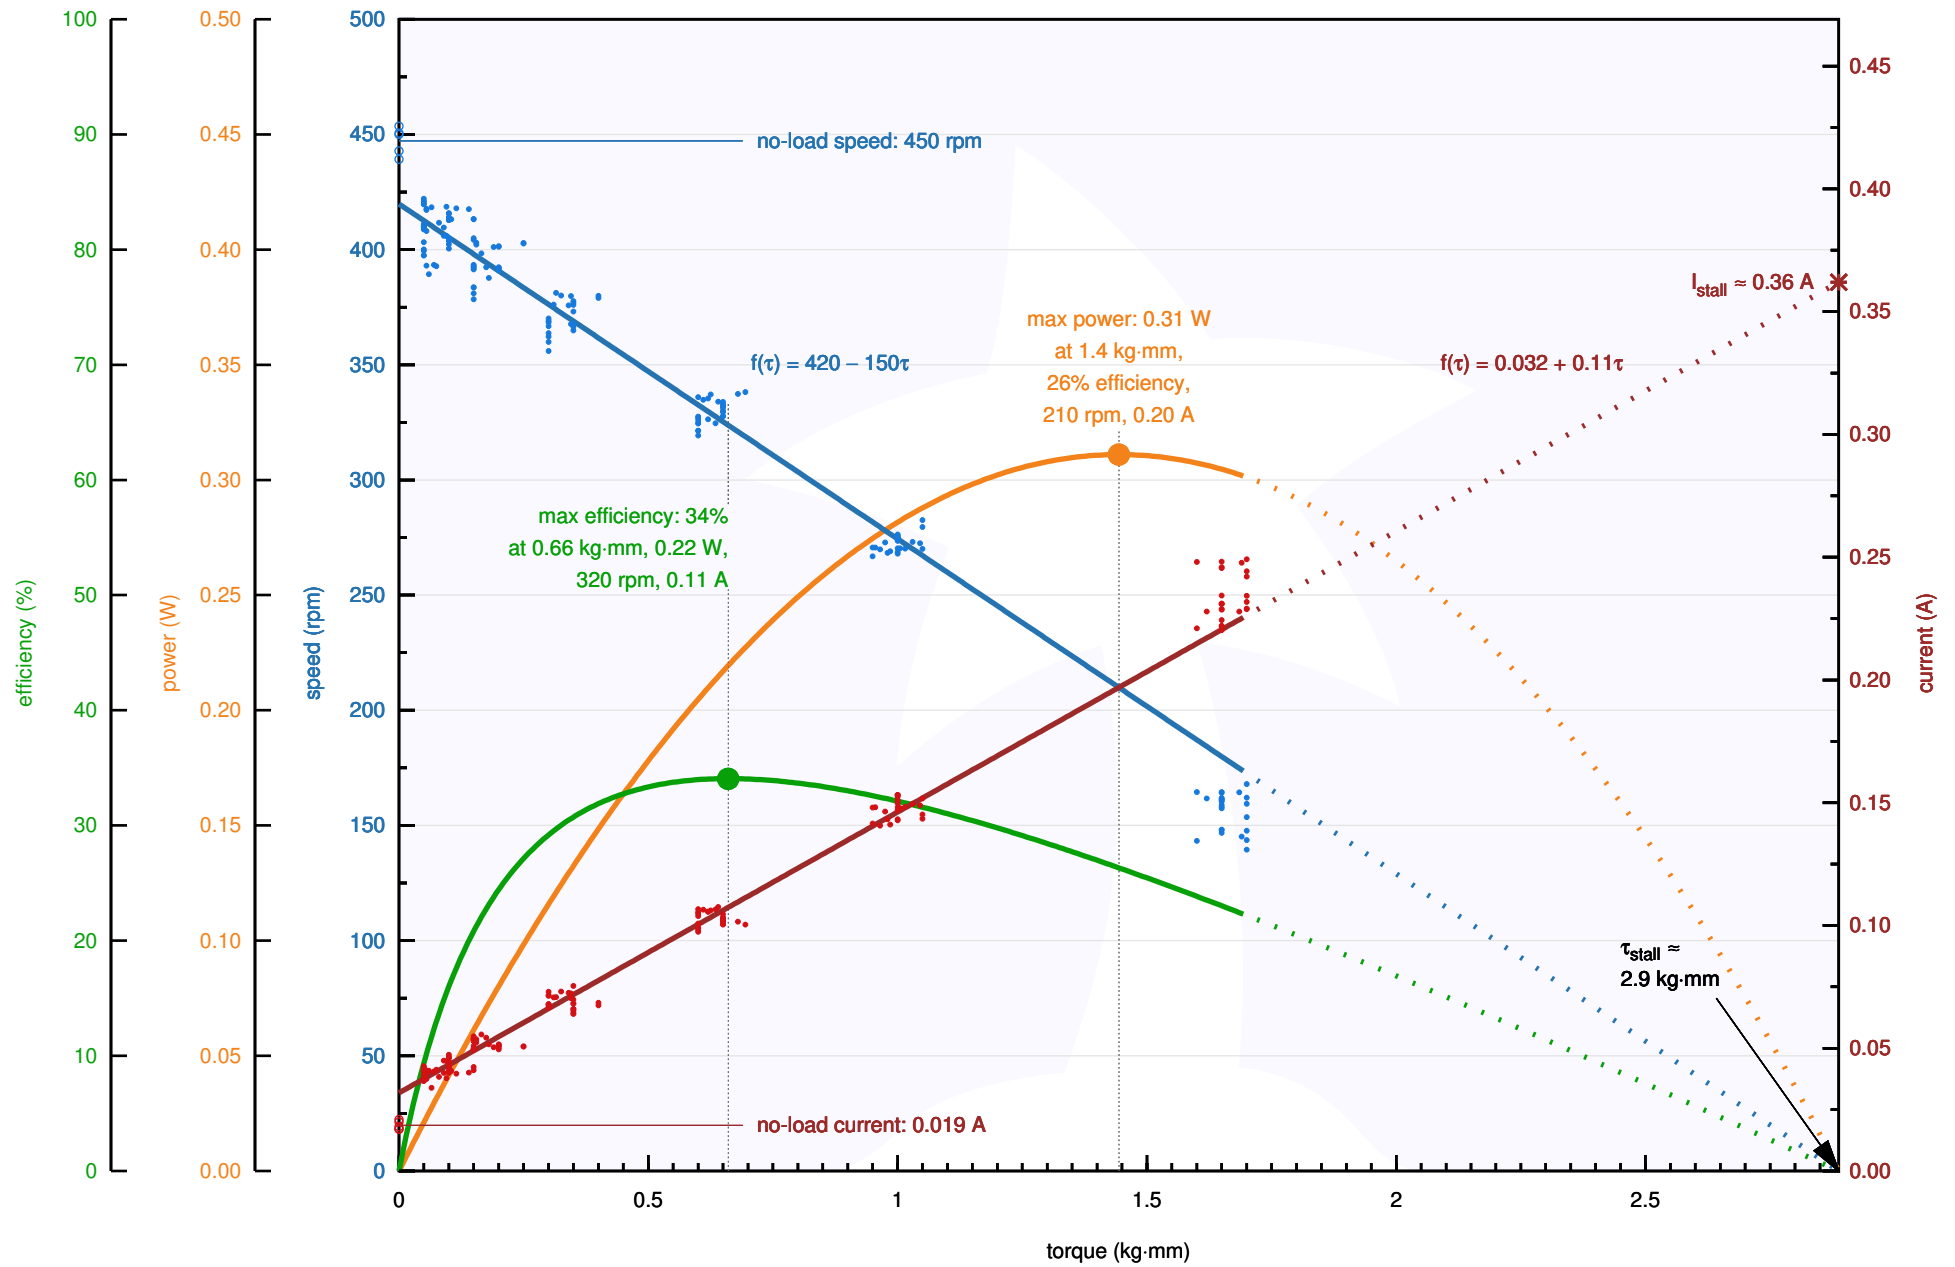


Pololu Items #1098, #2203 (50:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

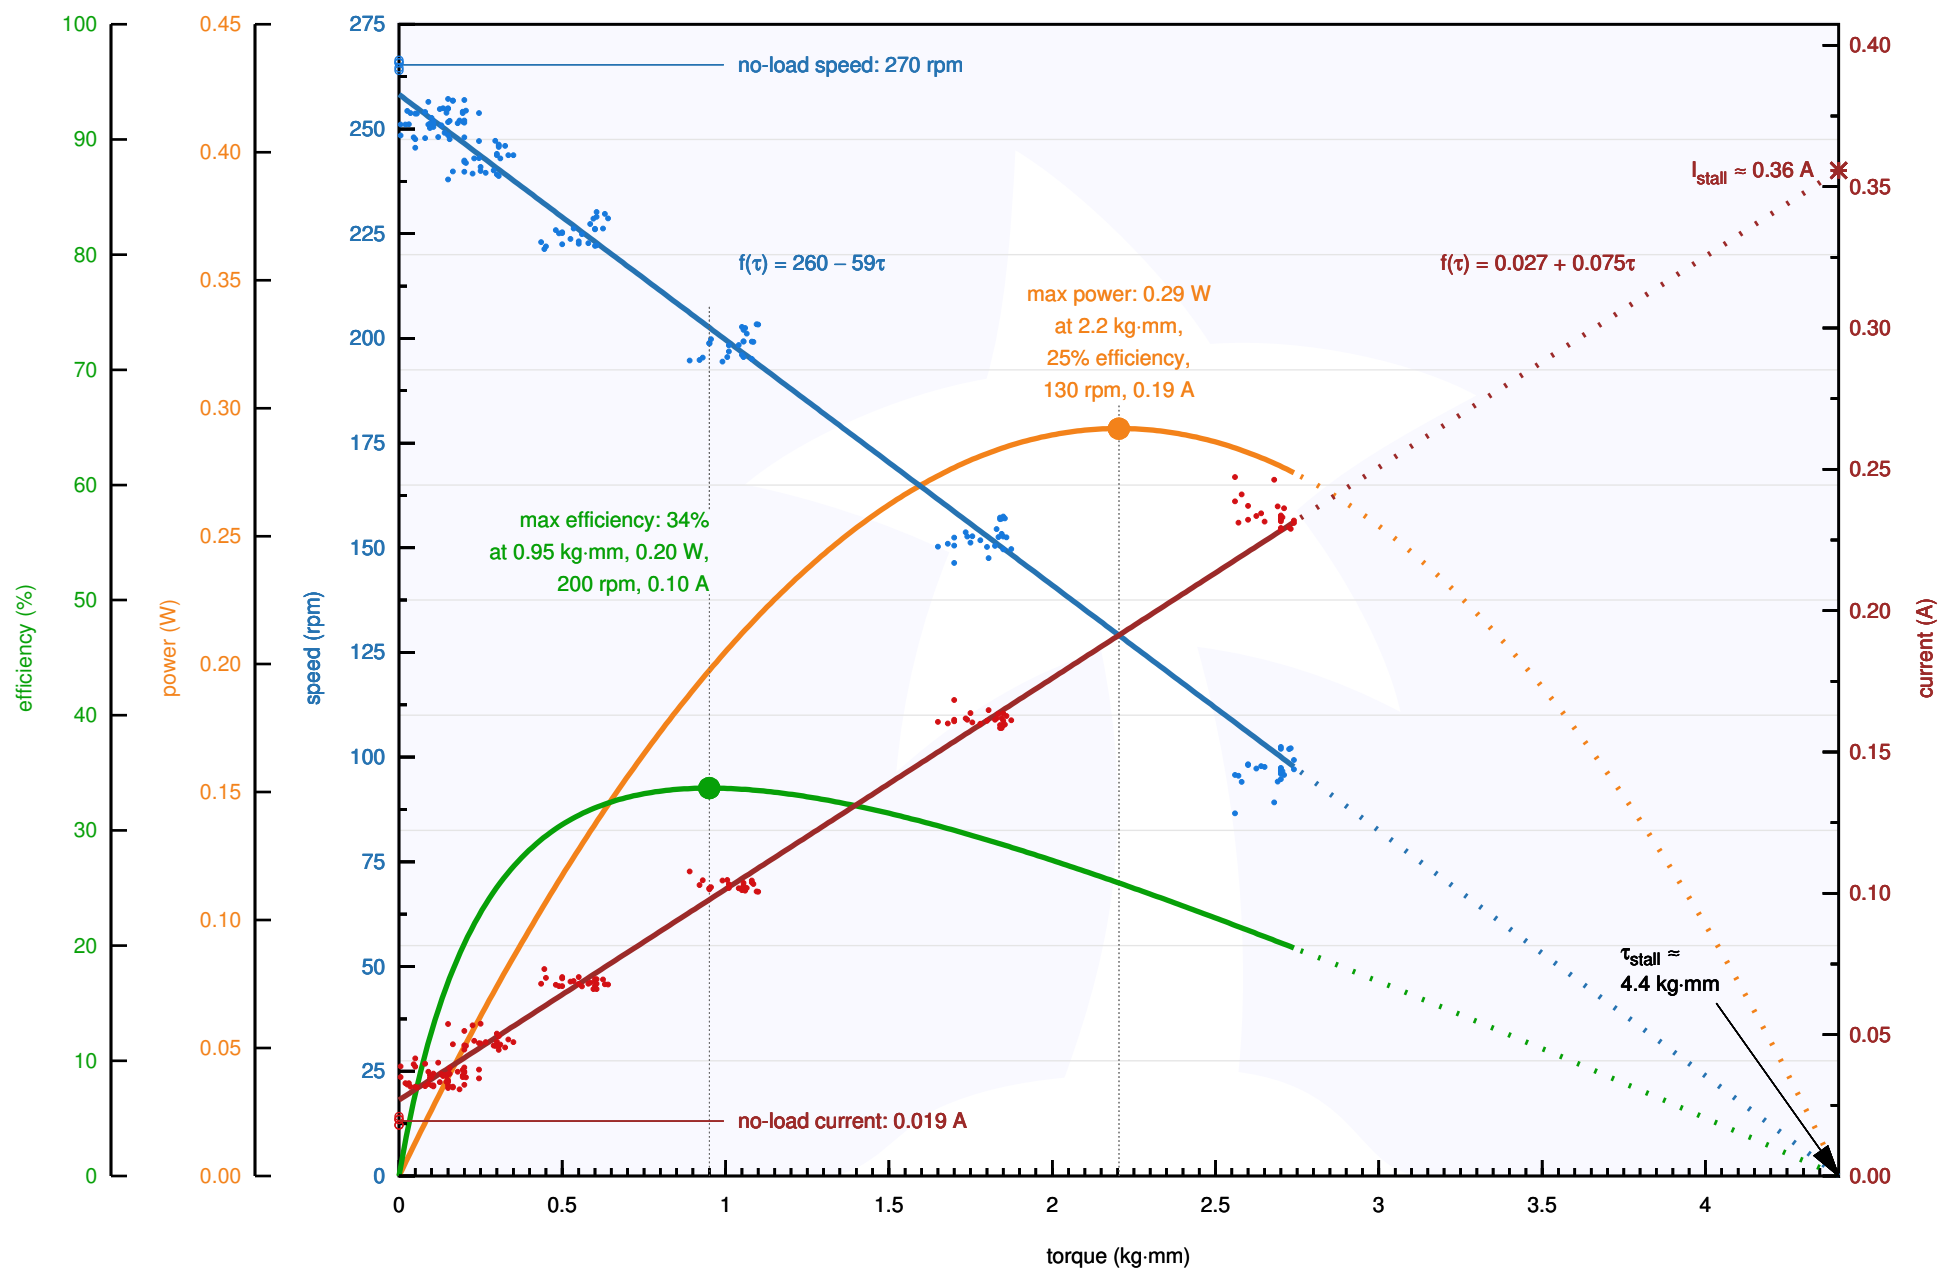


Pololu Items #2360, #2209 (75:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

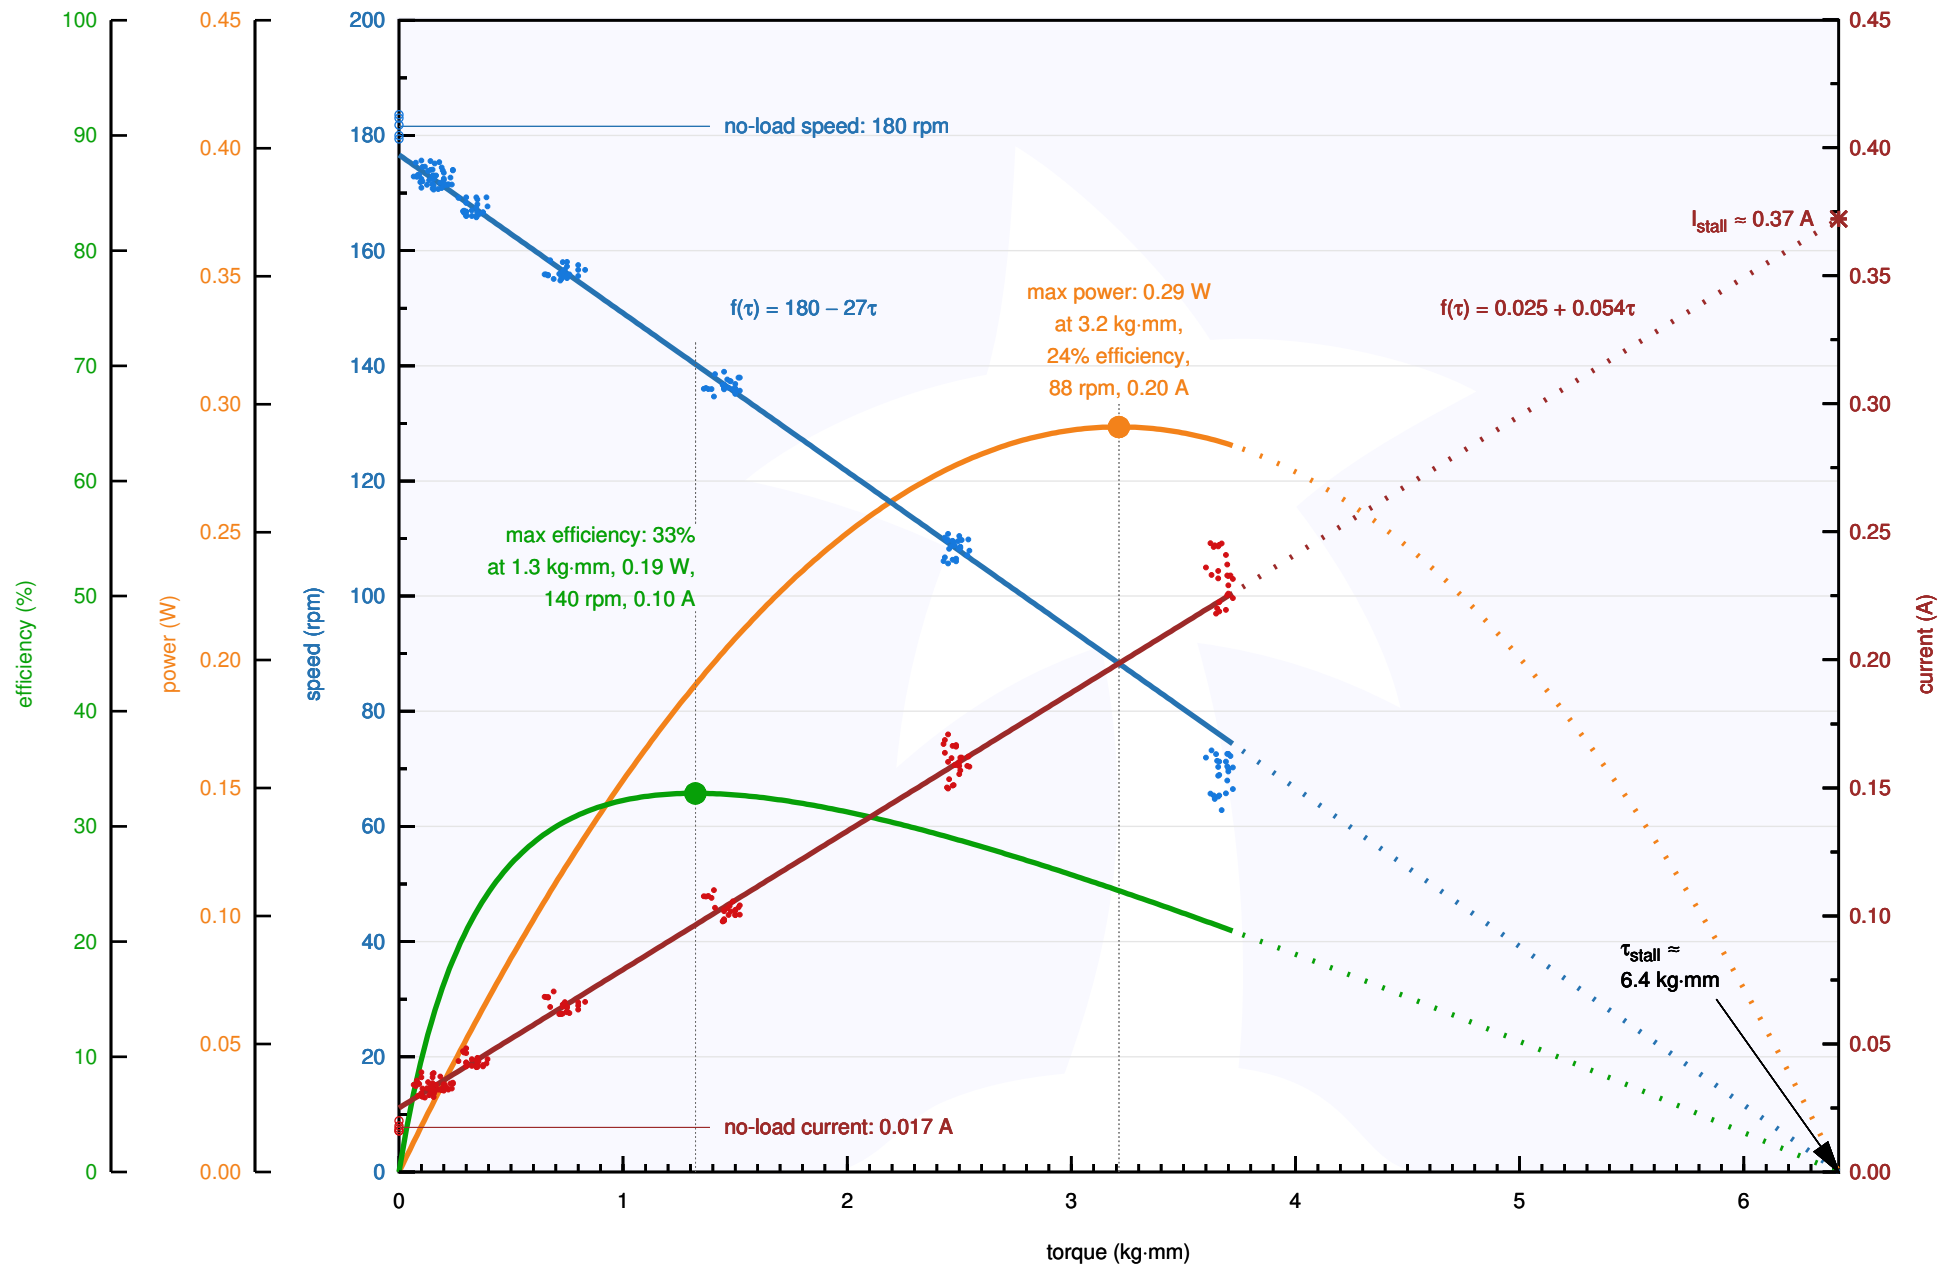


Pololu Items #992, #2204 (100:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

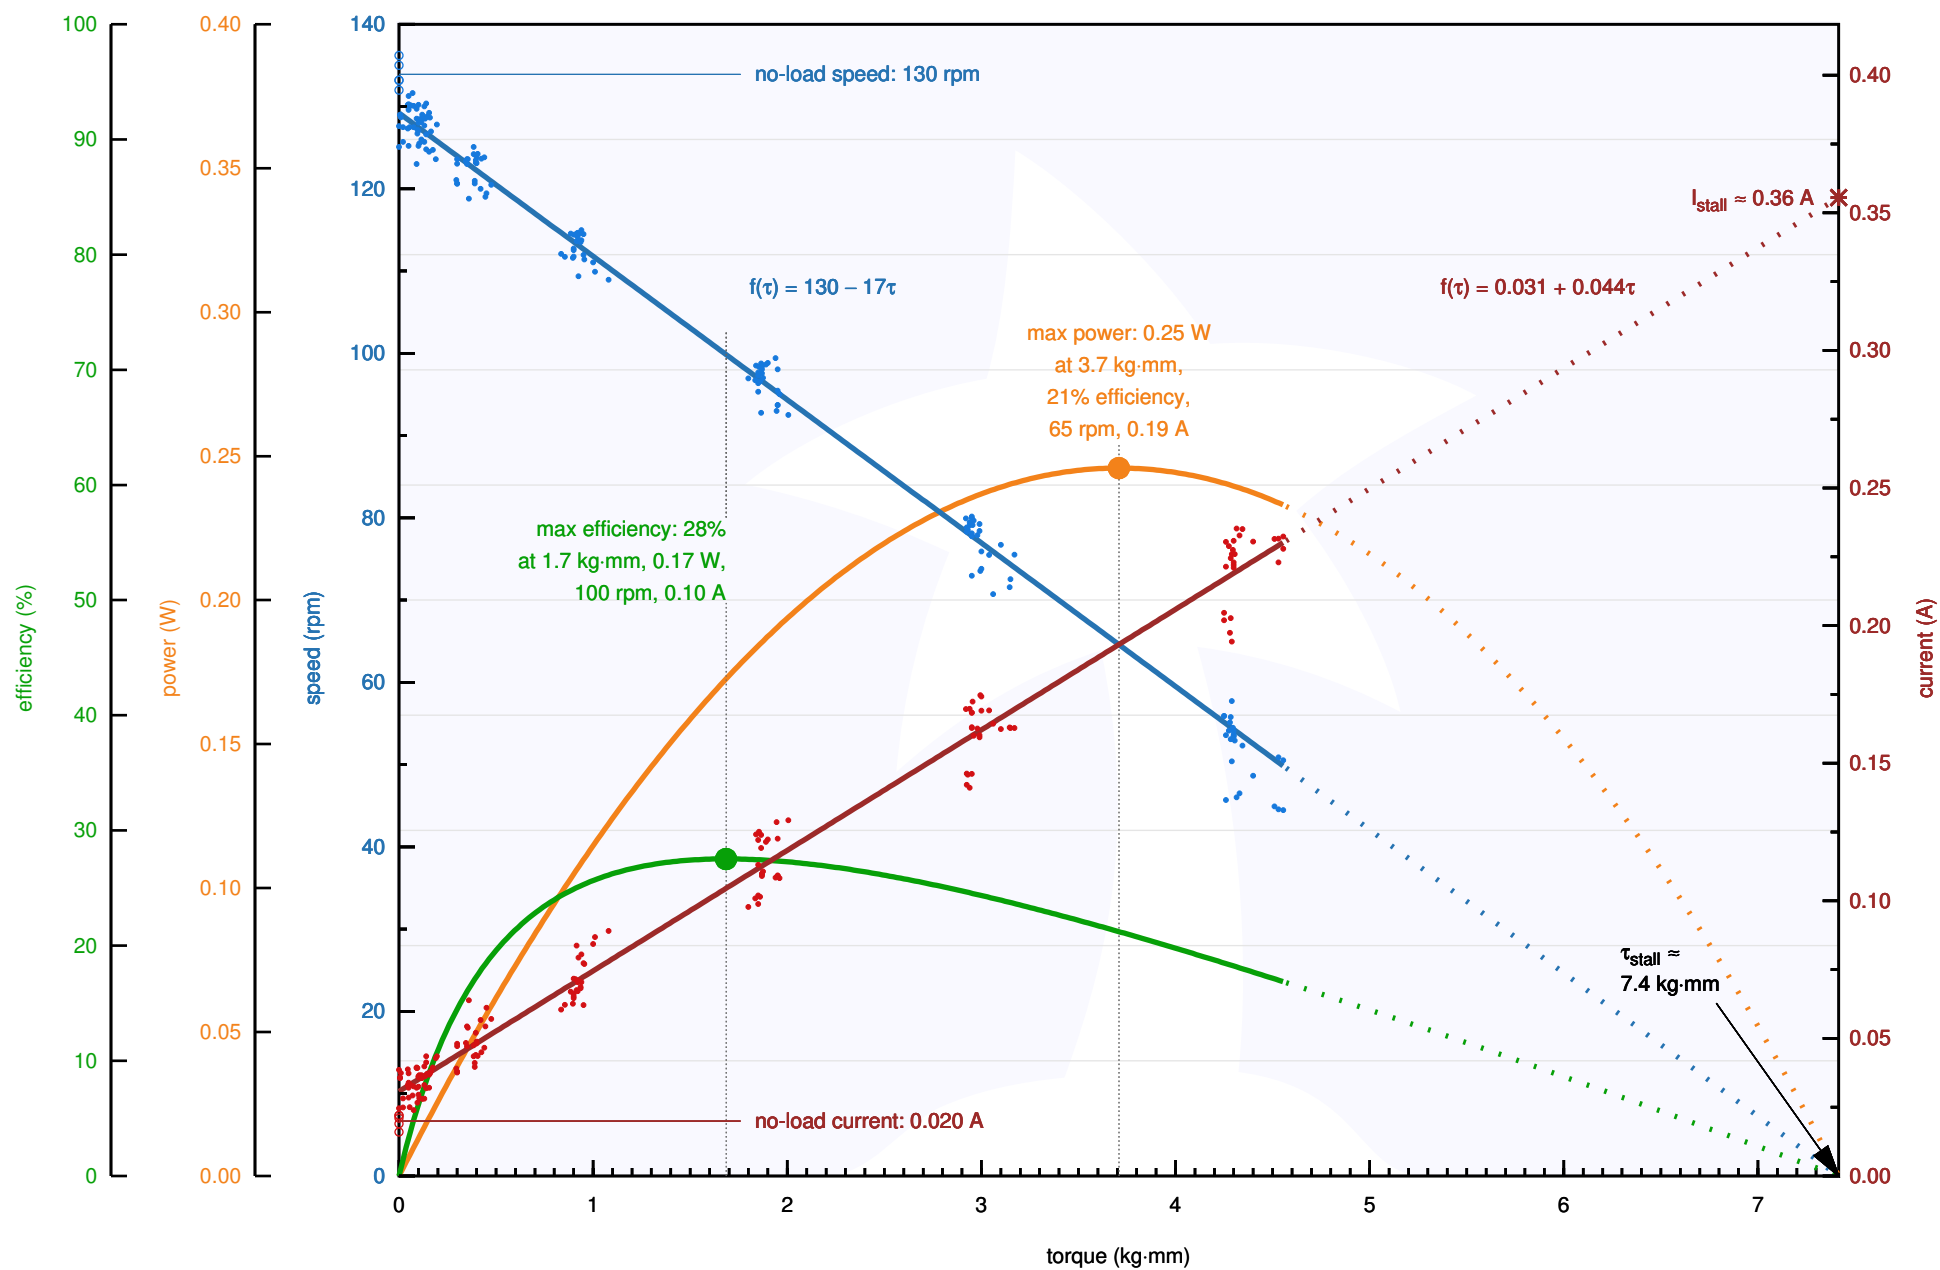


Pololu Items #1097, #2205 (150:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

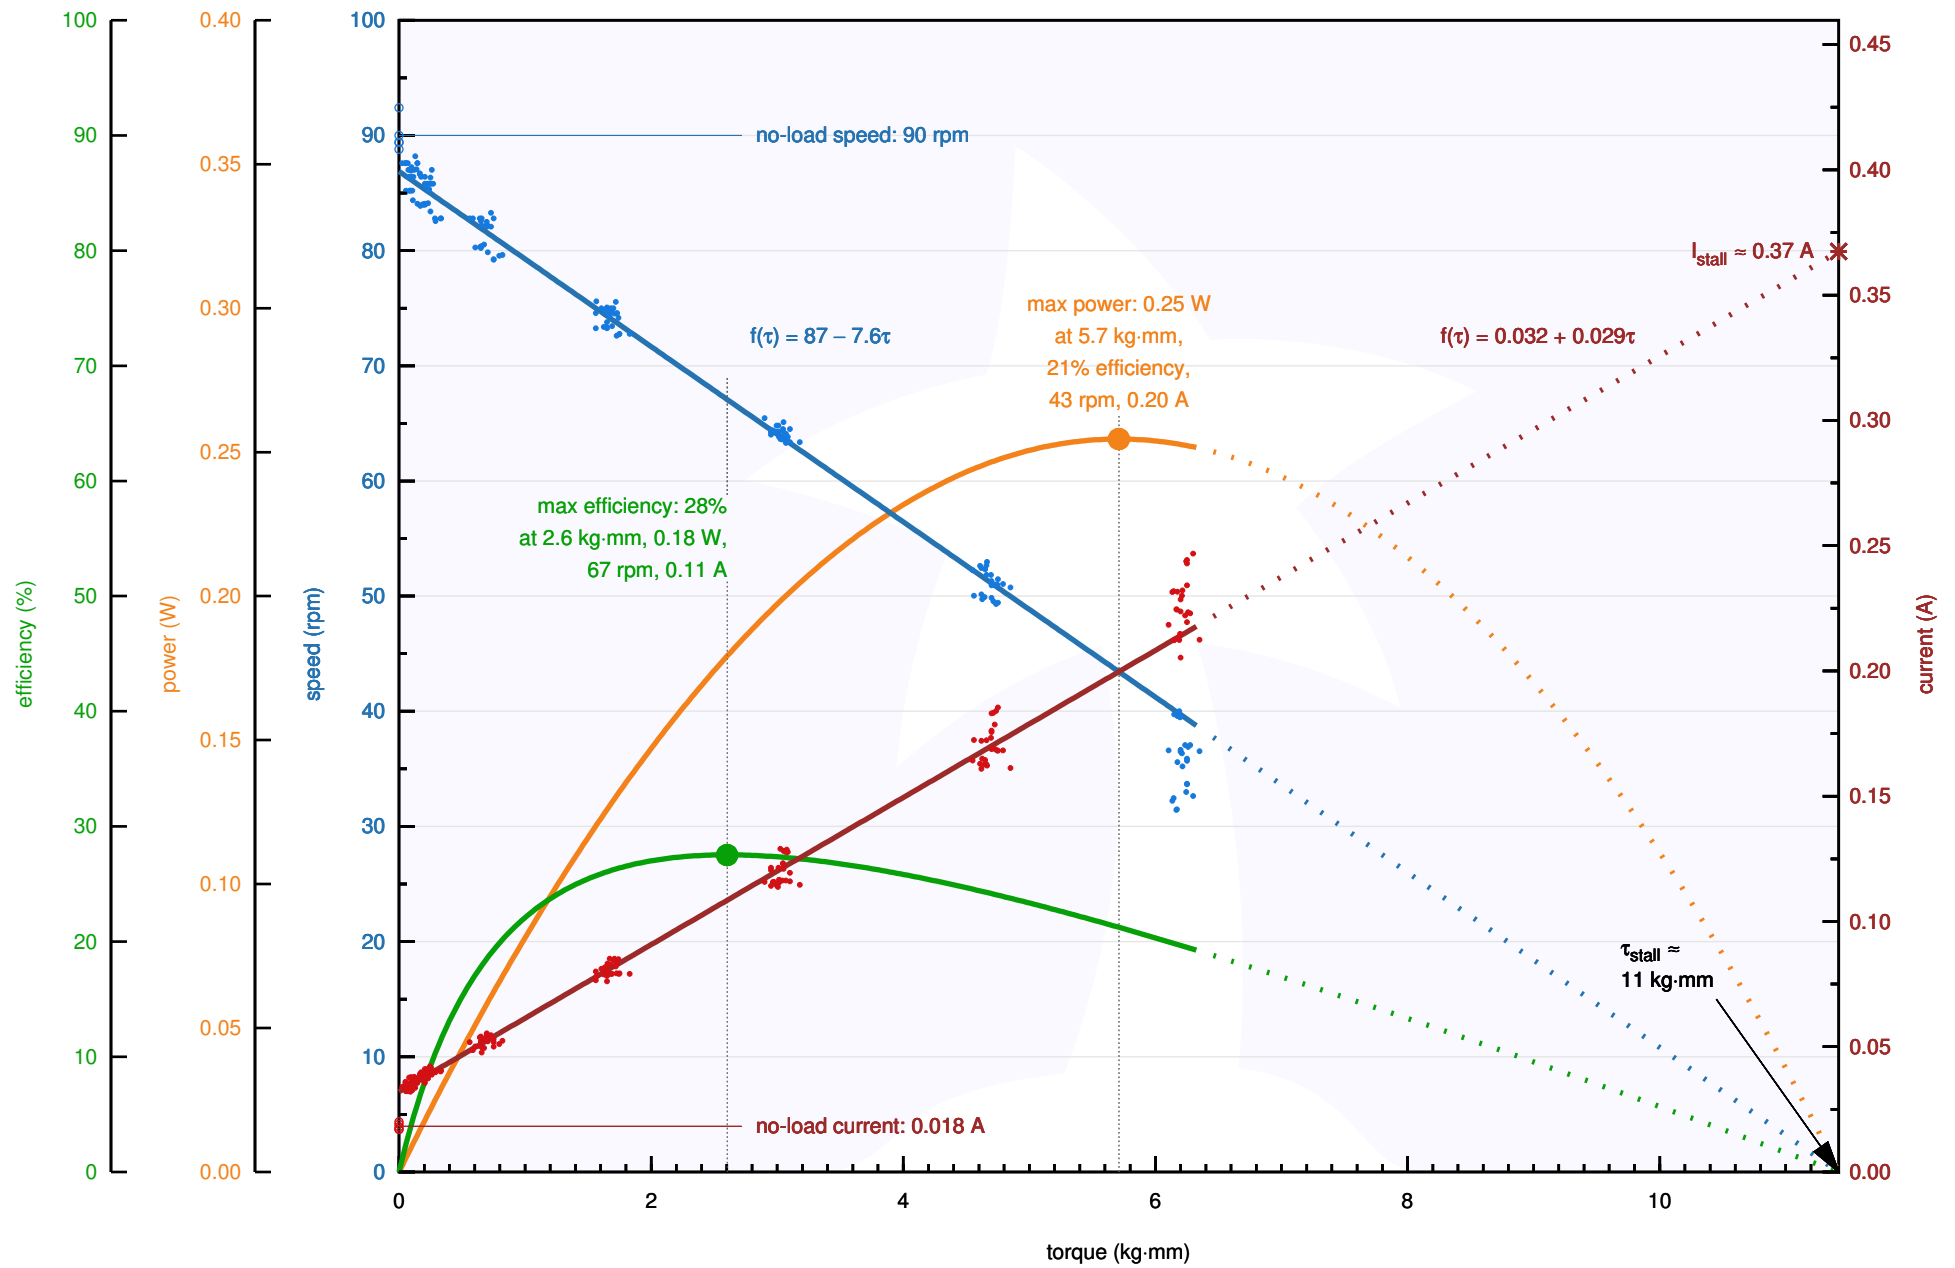


Pololu Items #1096, #2206 (210:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

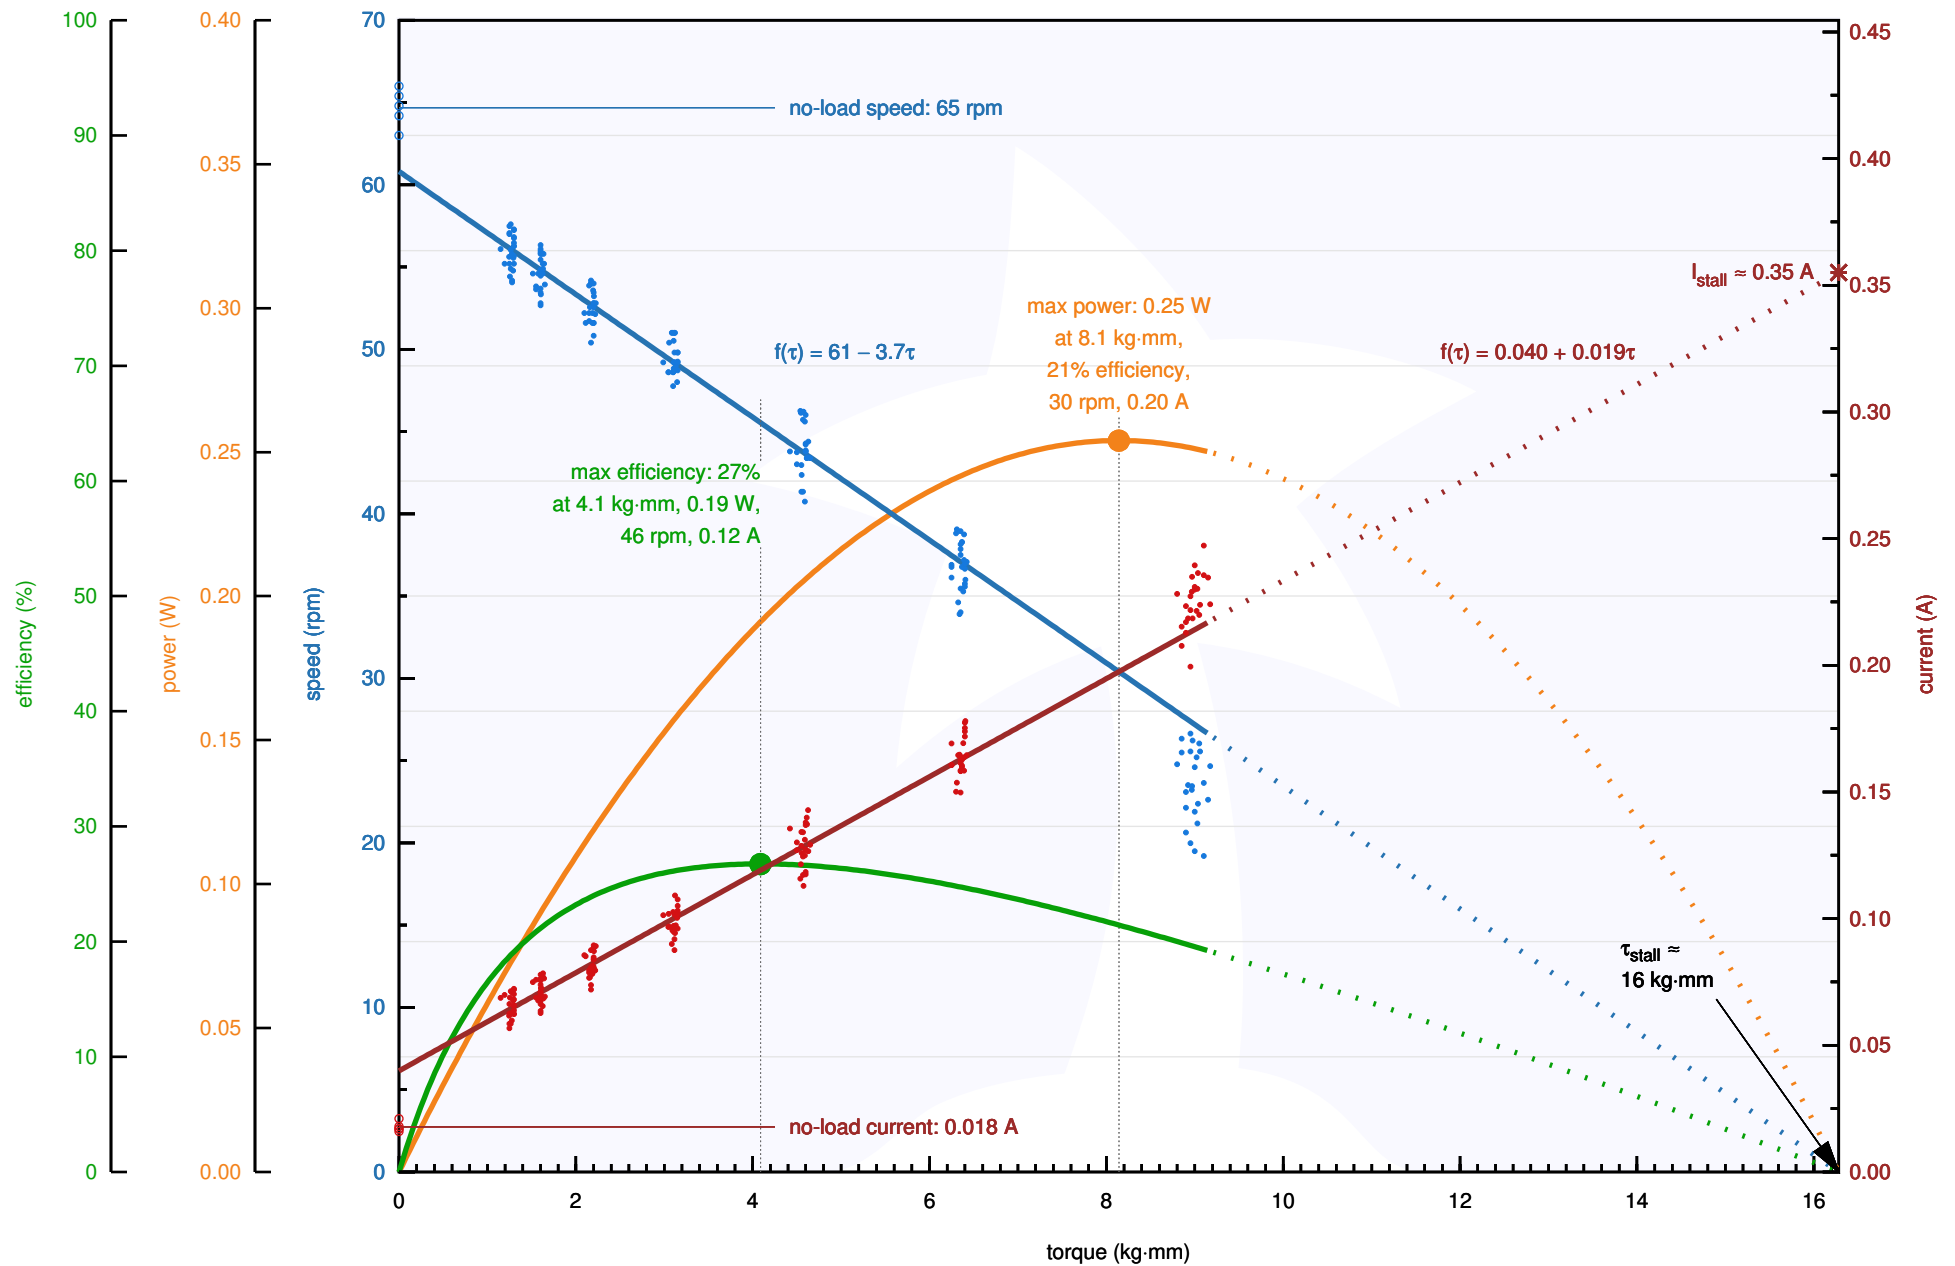


Pololu Items #1095, #2207 (250:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

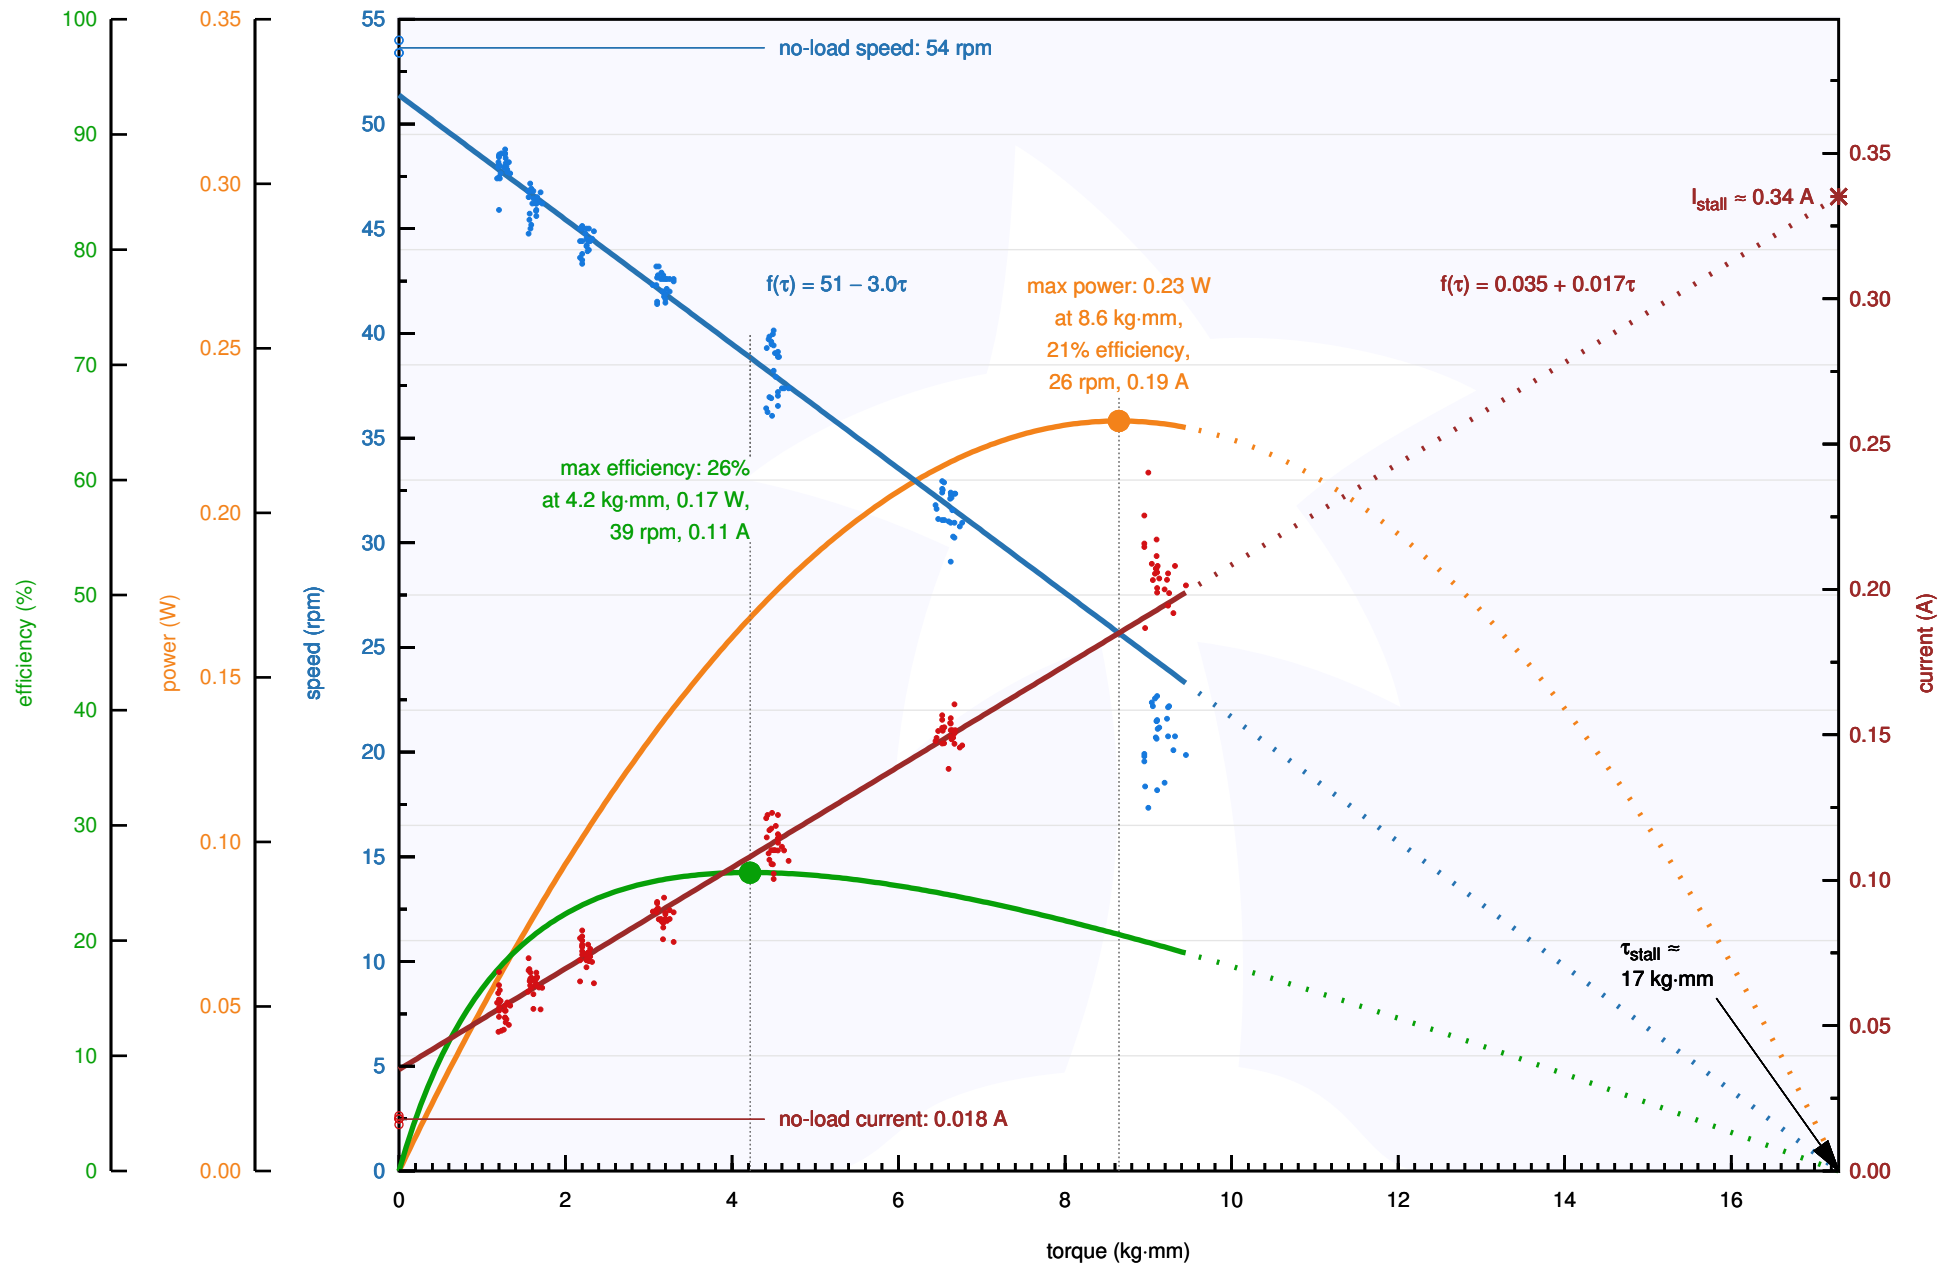


Pololu Items #1094, #2208 (298:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

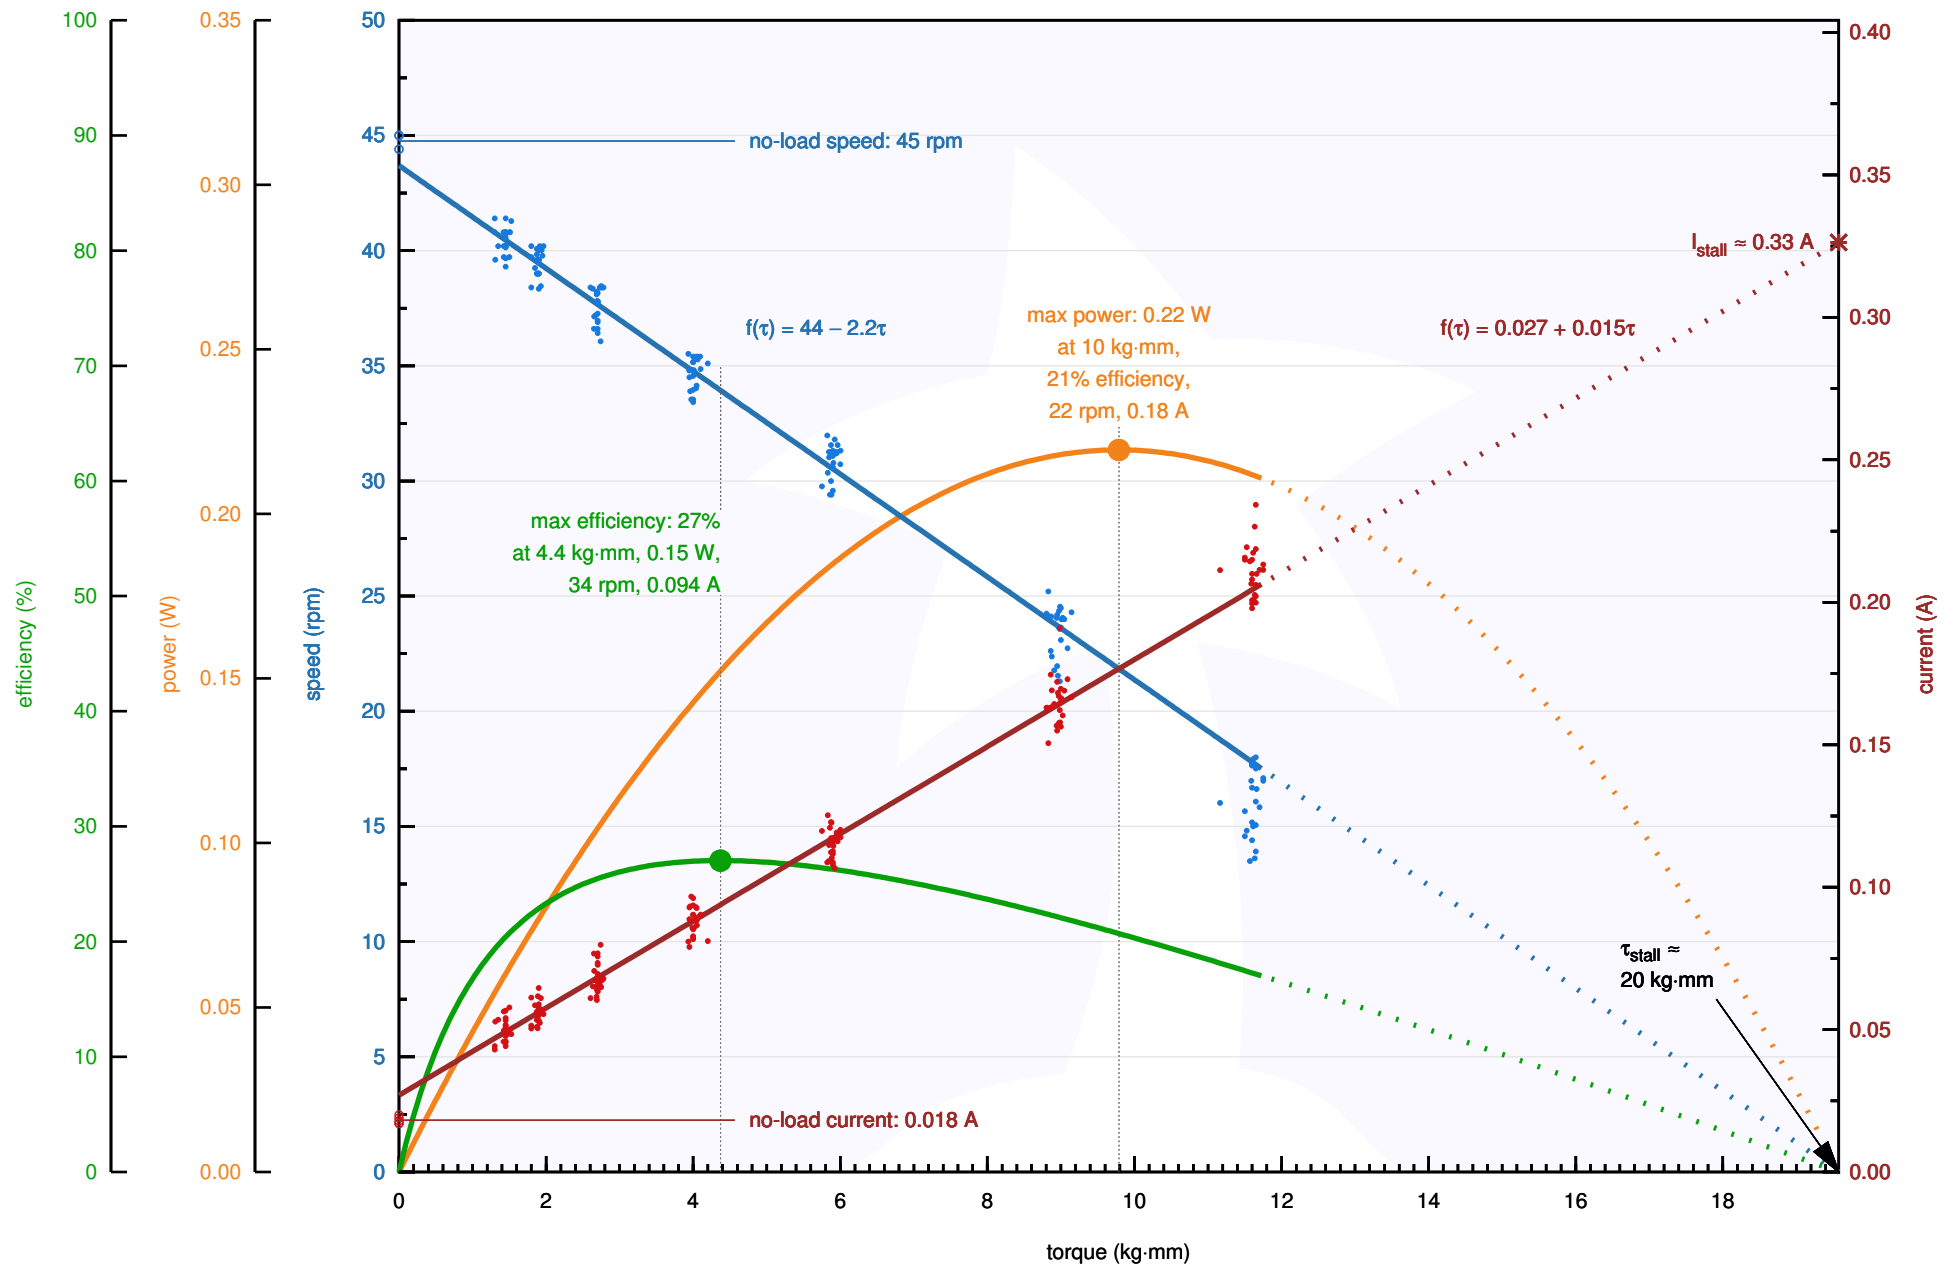


Pololu Items #1596, #3058 (1000:1 Micro Metal Gearmotor LP 6V) Performance at 6 V

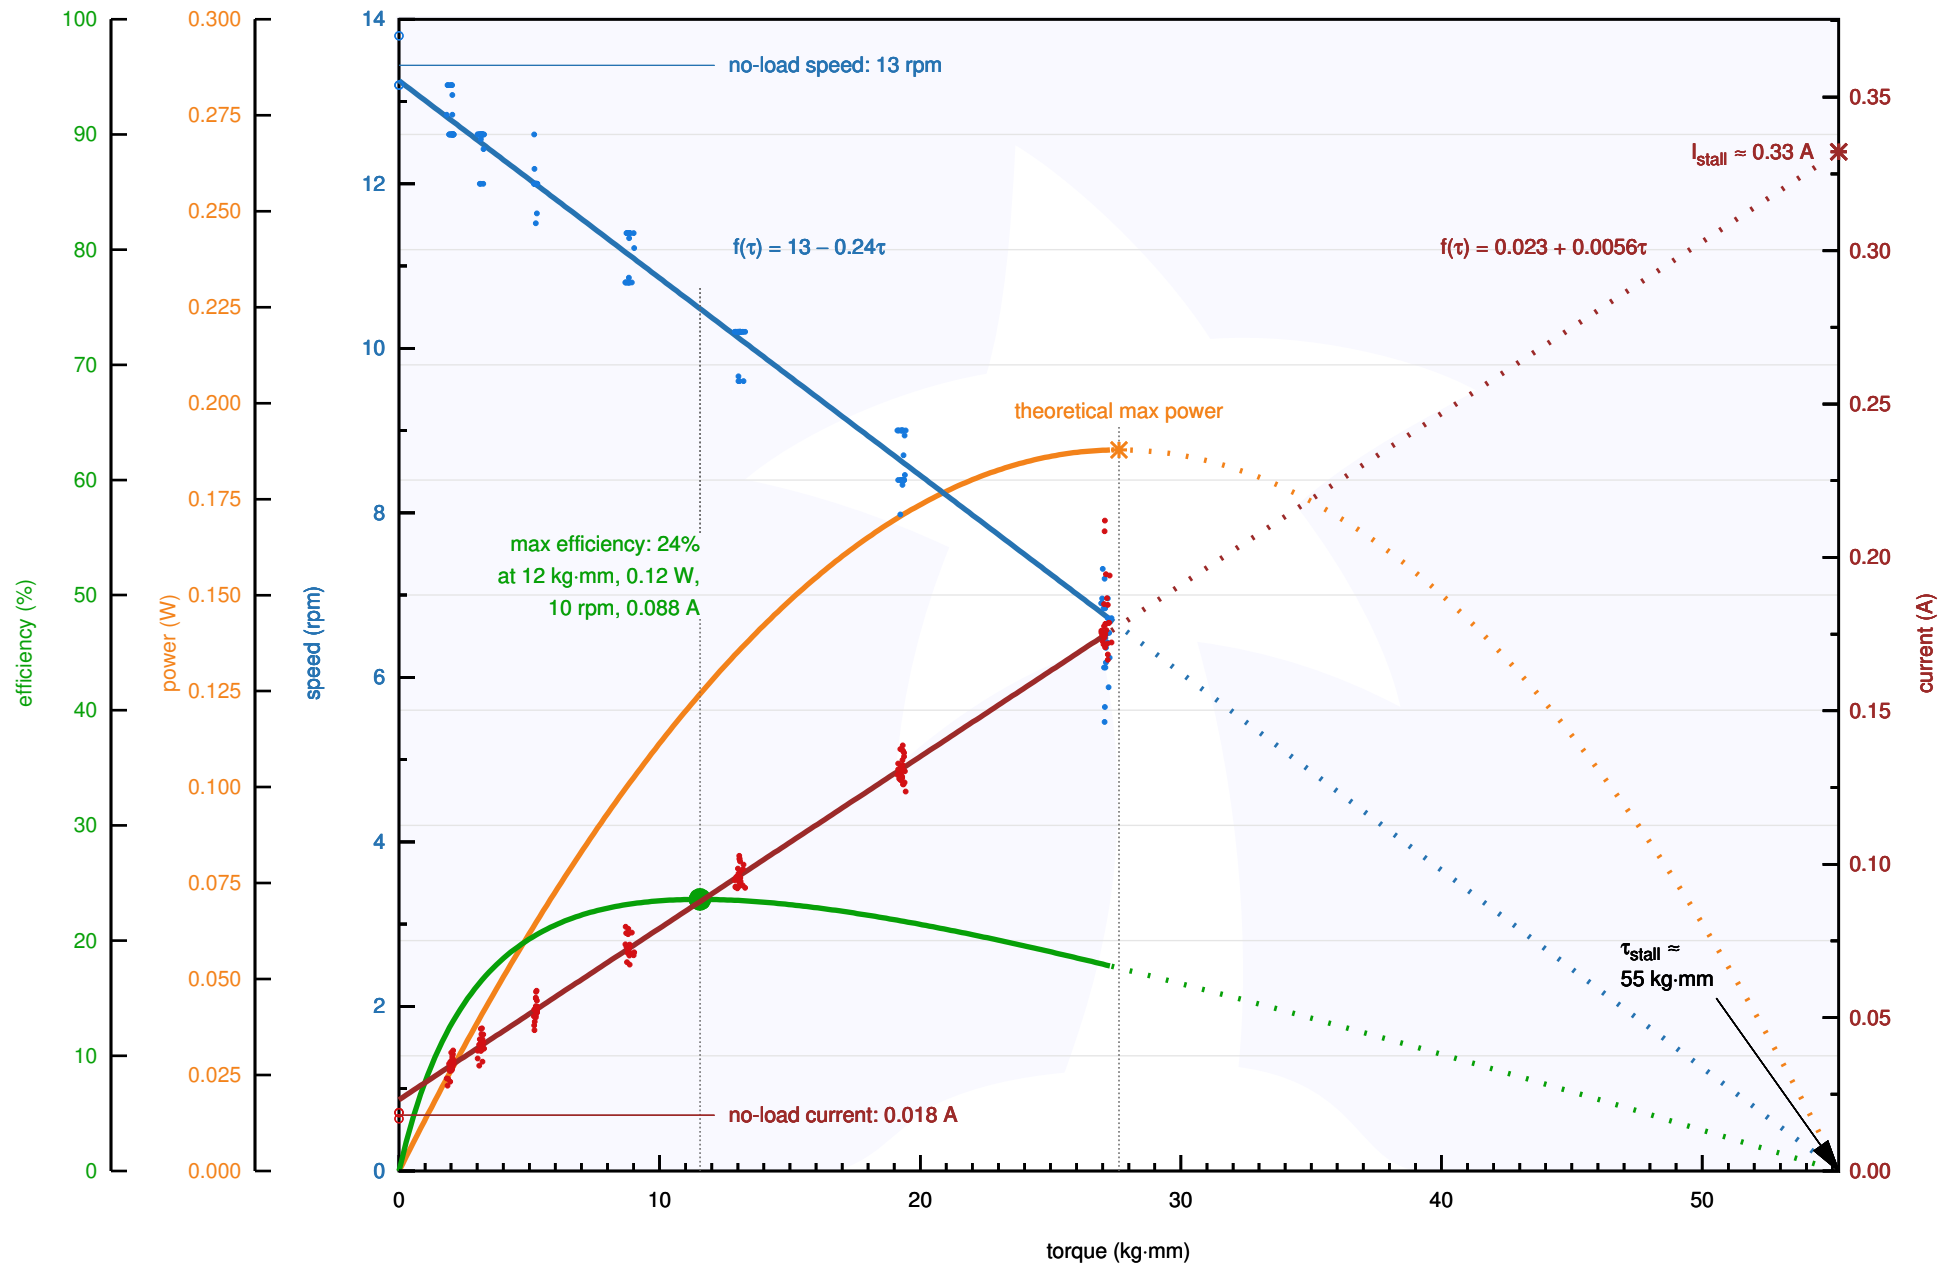


Pololu Items #2364, #2378 (30:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

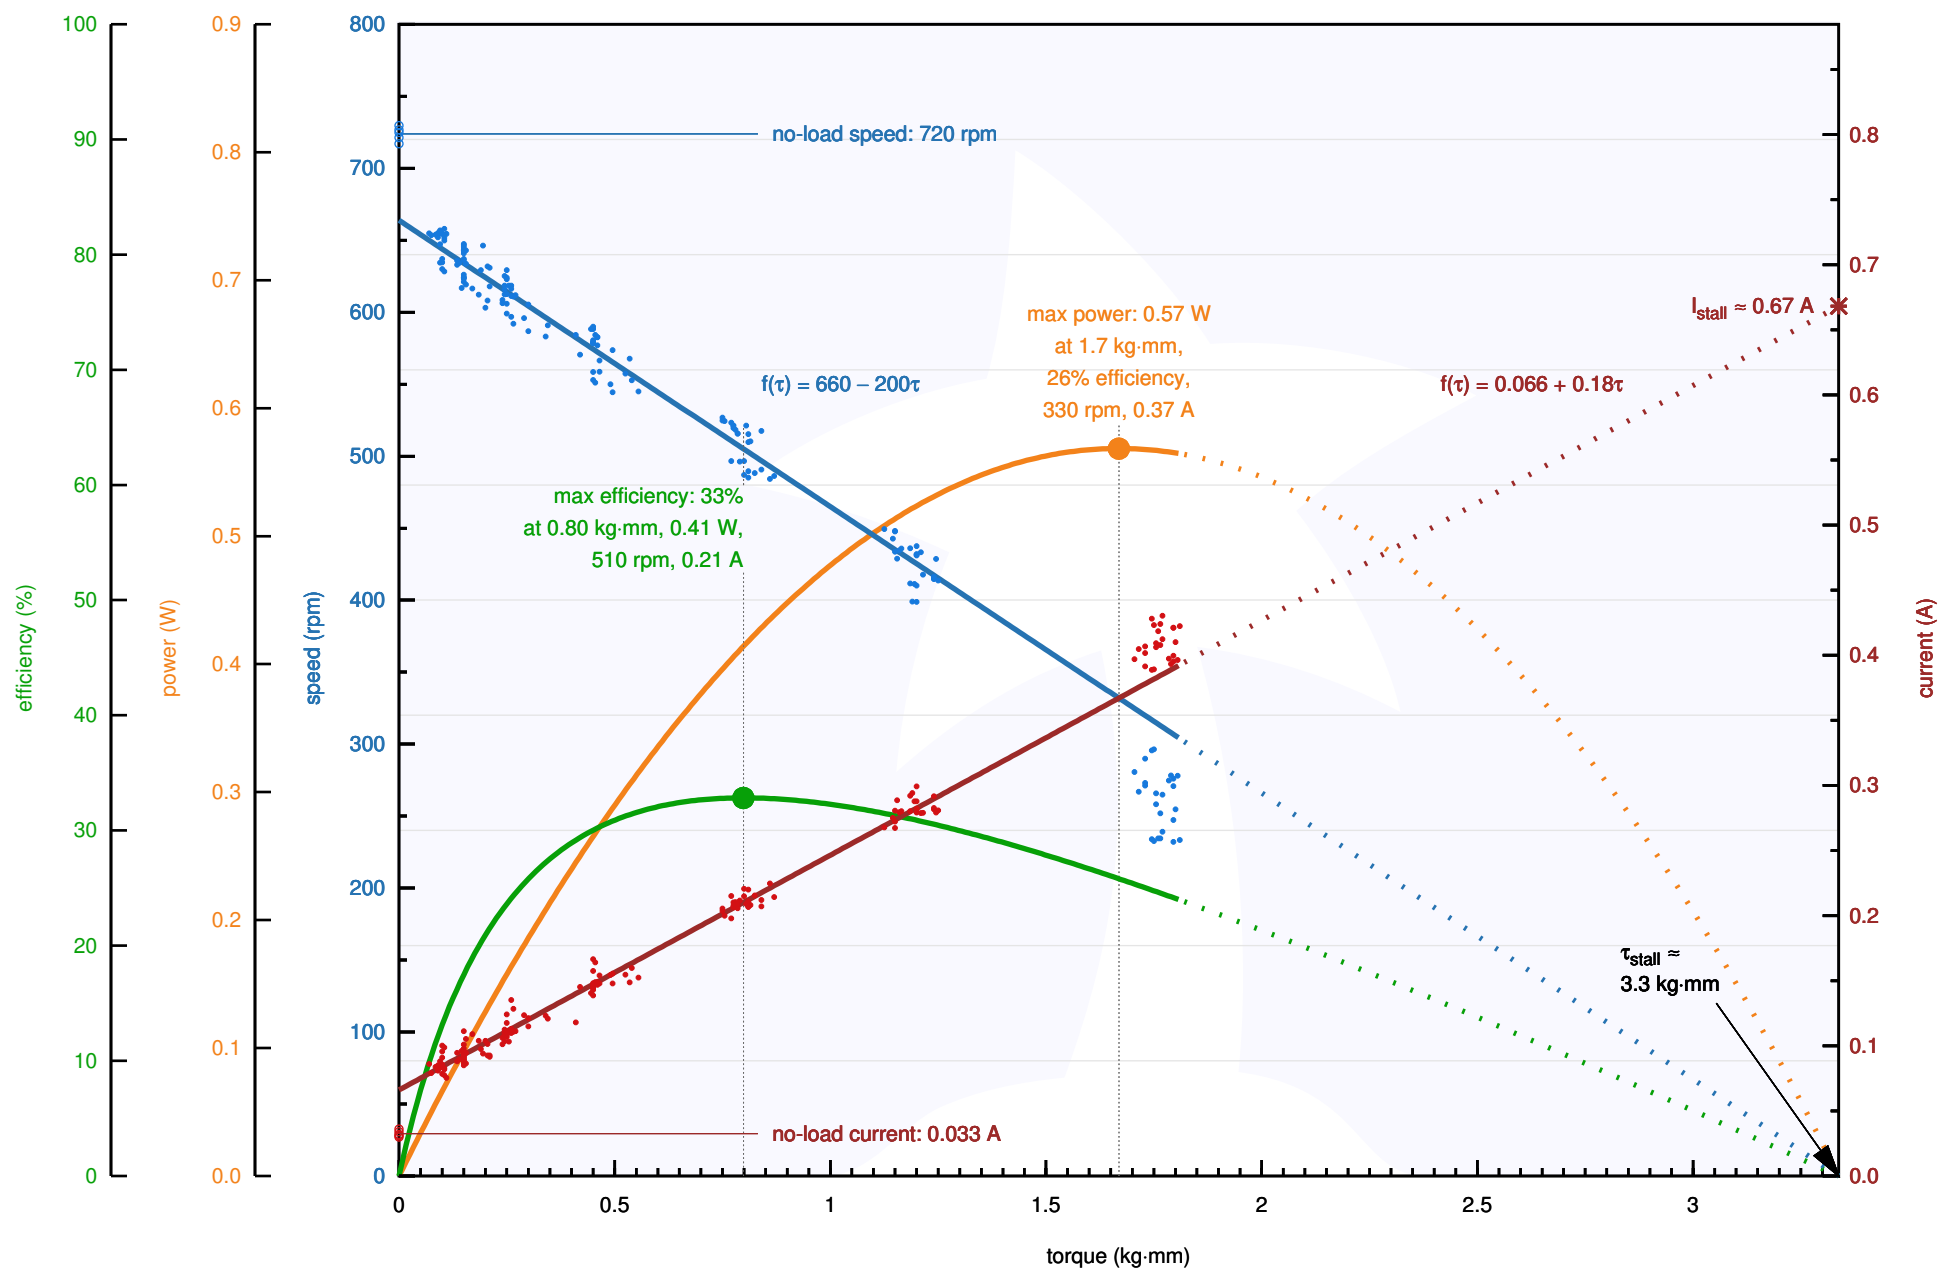


Pololu Items #2365, #2379 (50:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

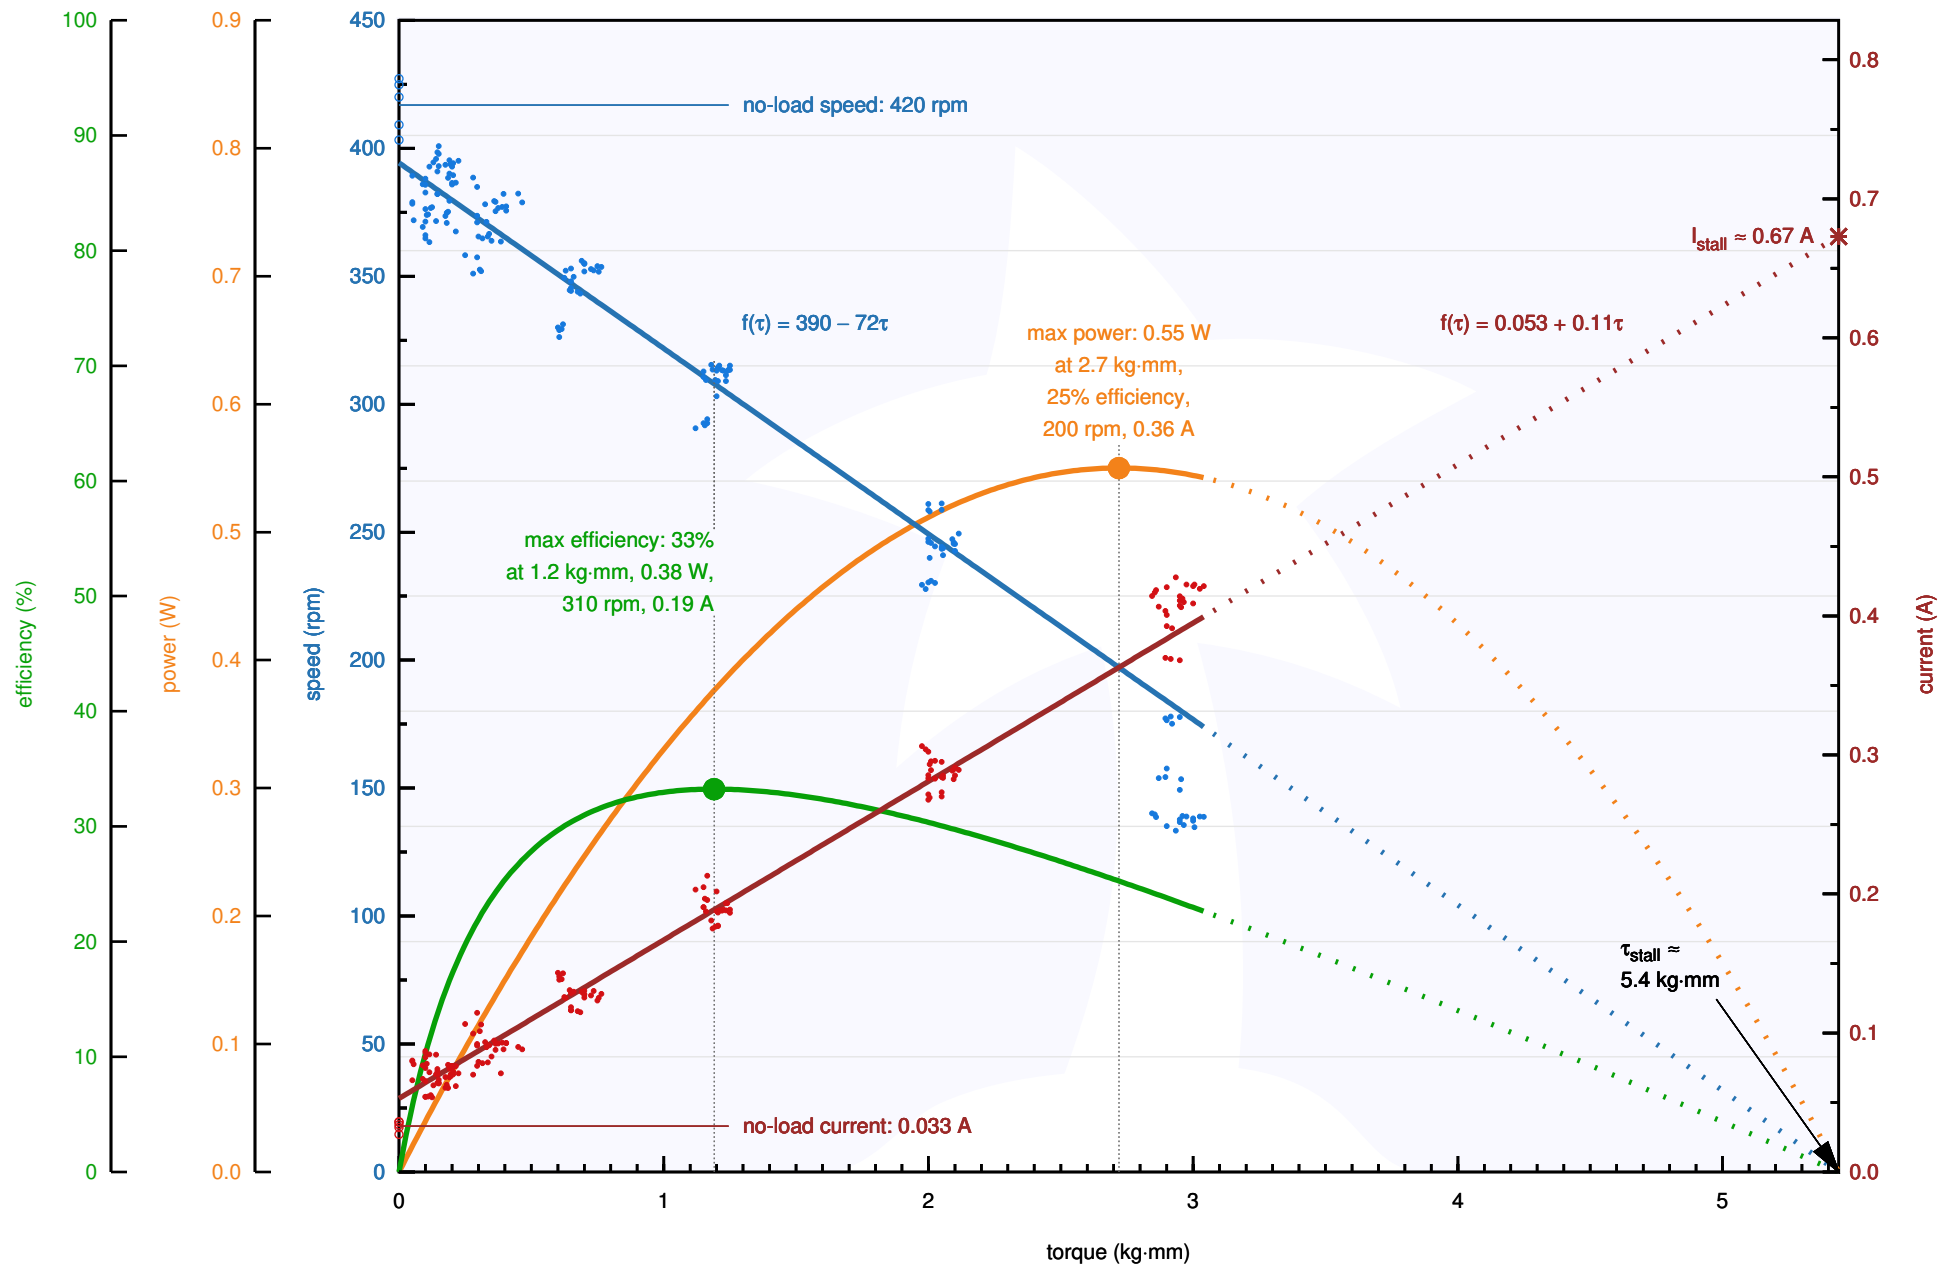


Pololu Items #2366, #2380 (75:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

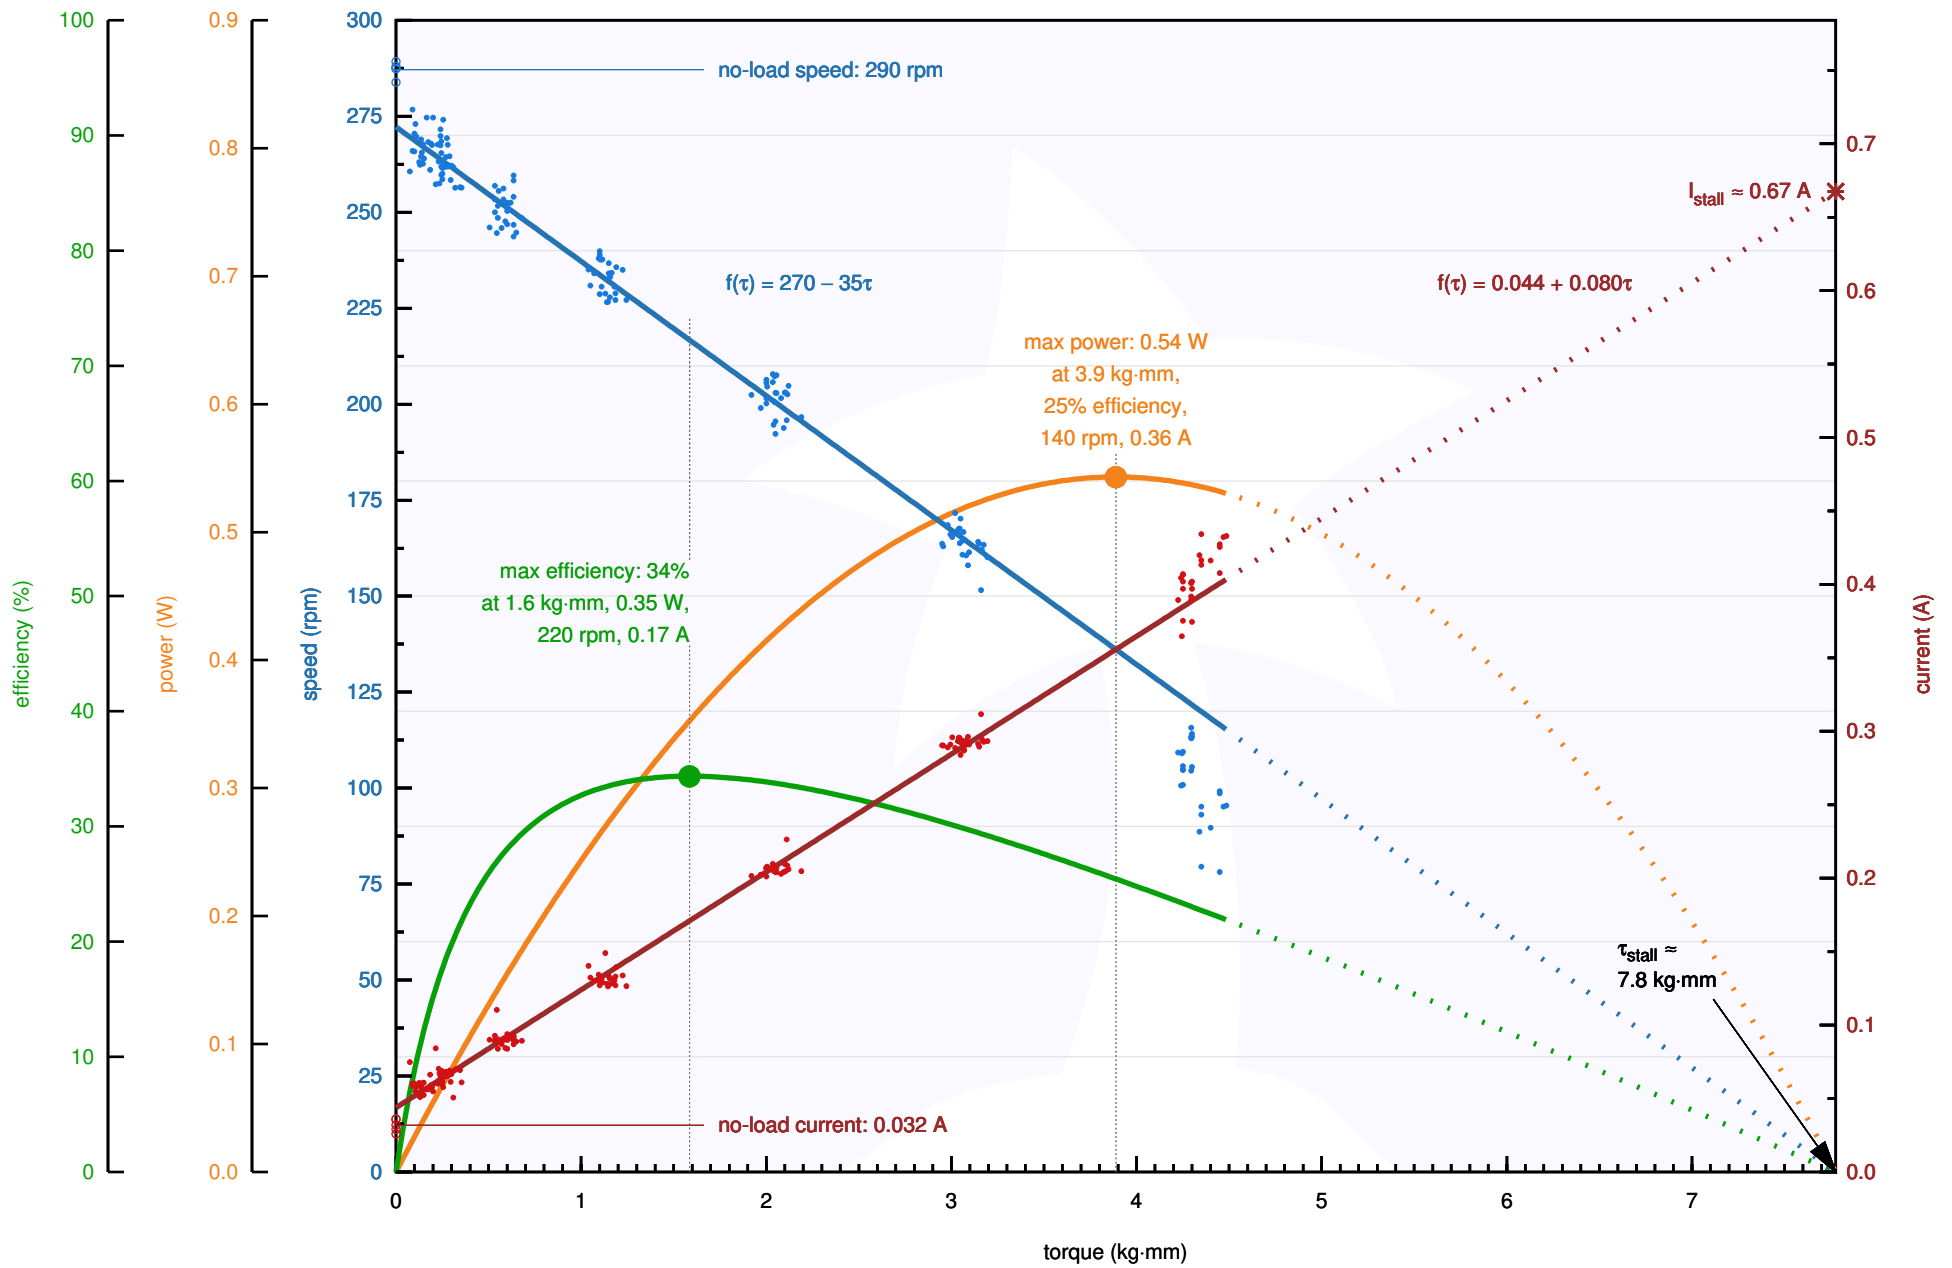


Pololu Items #2367, #2381 (100:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

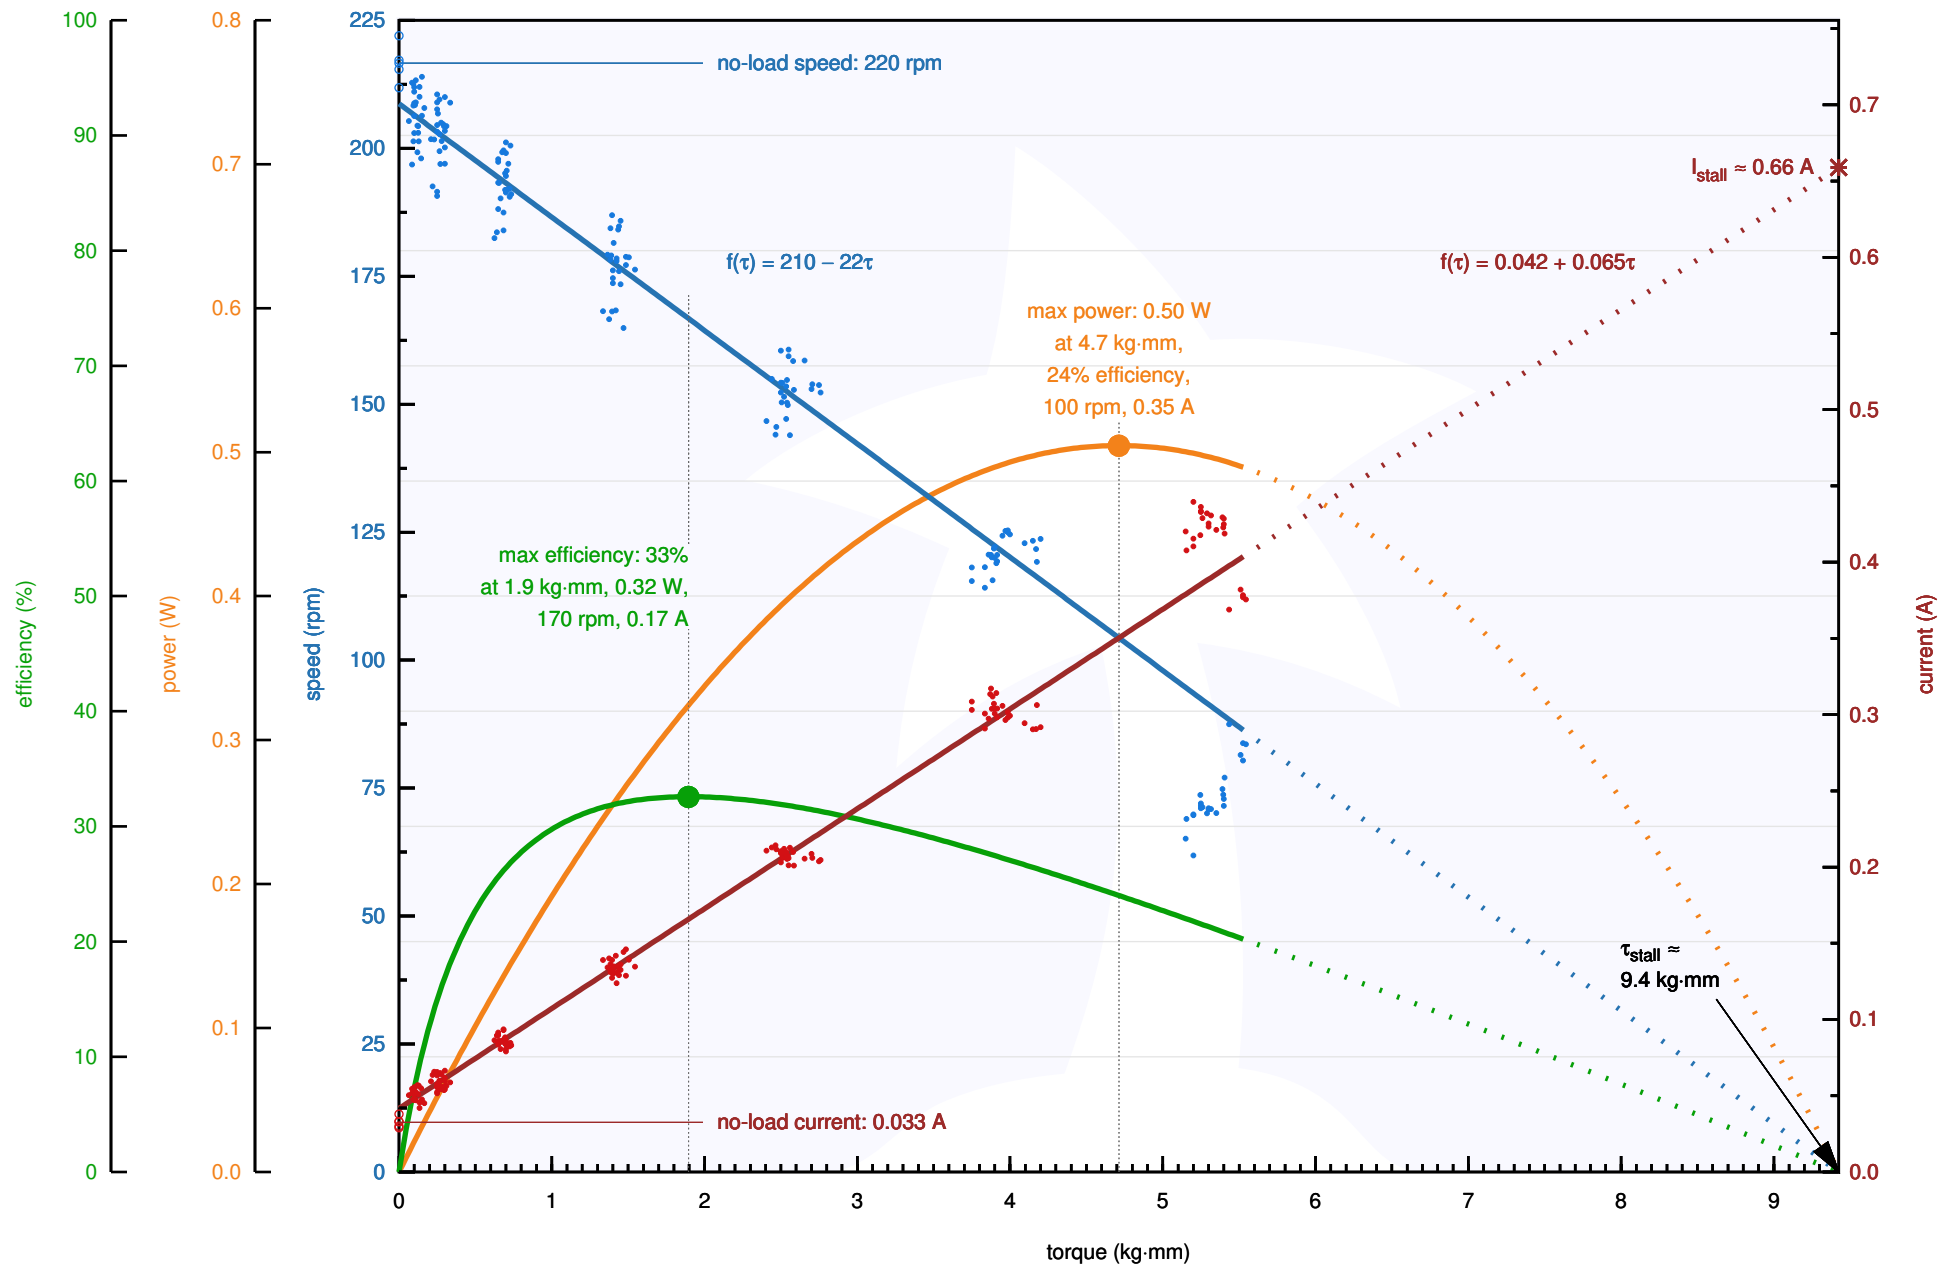


Pololu Items #2368, #2382 (150:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

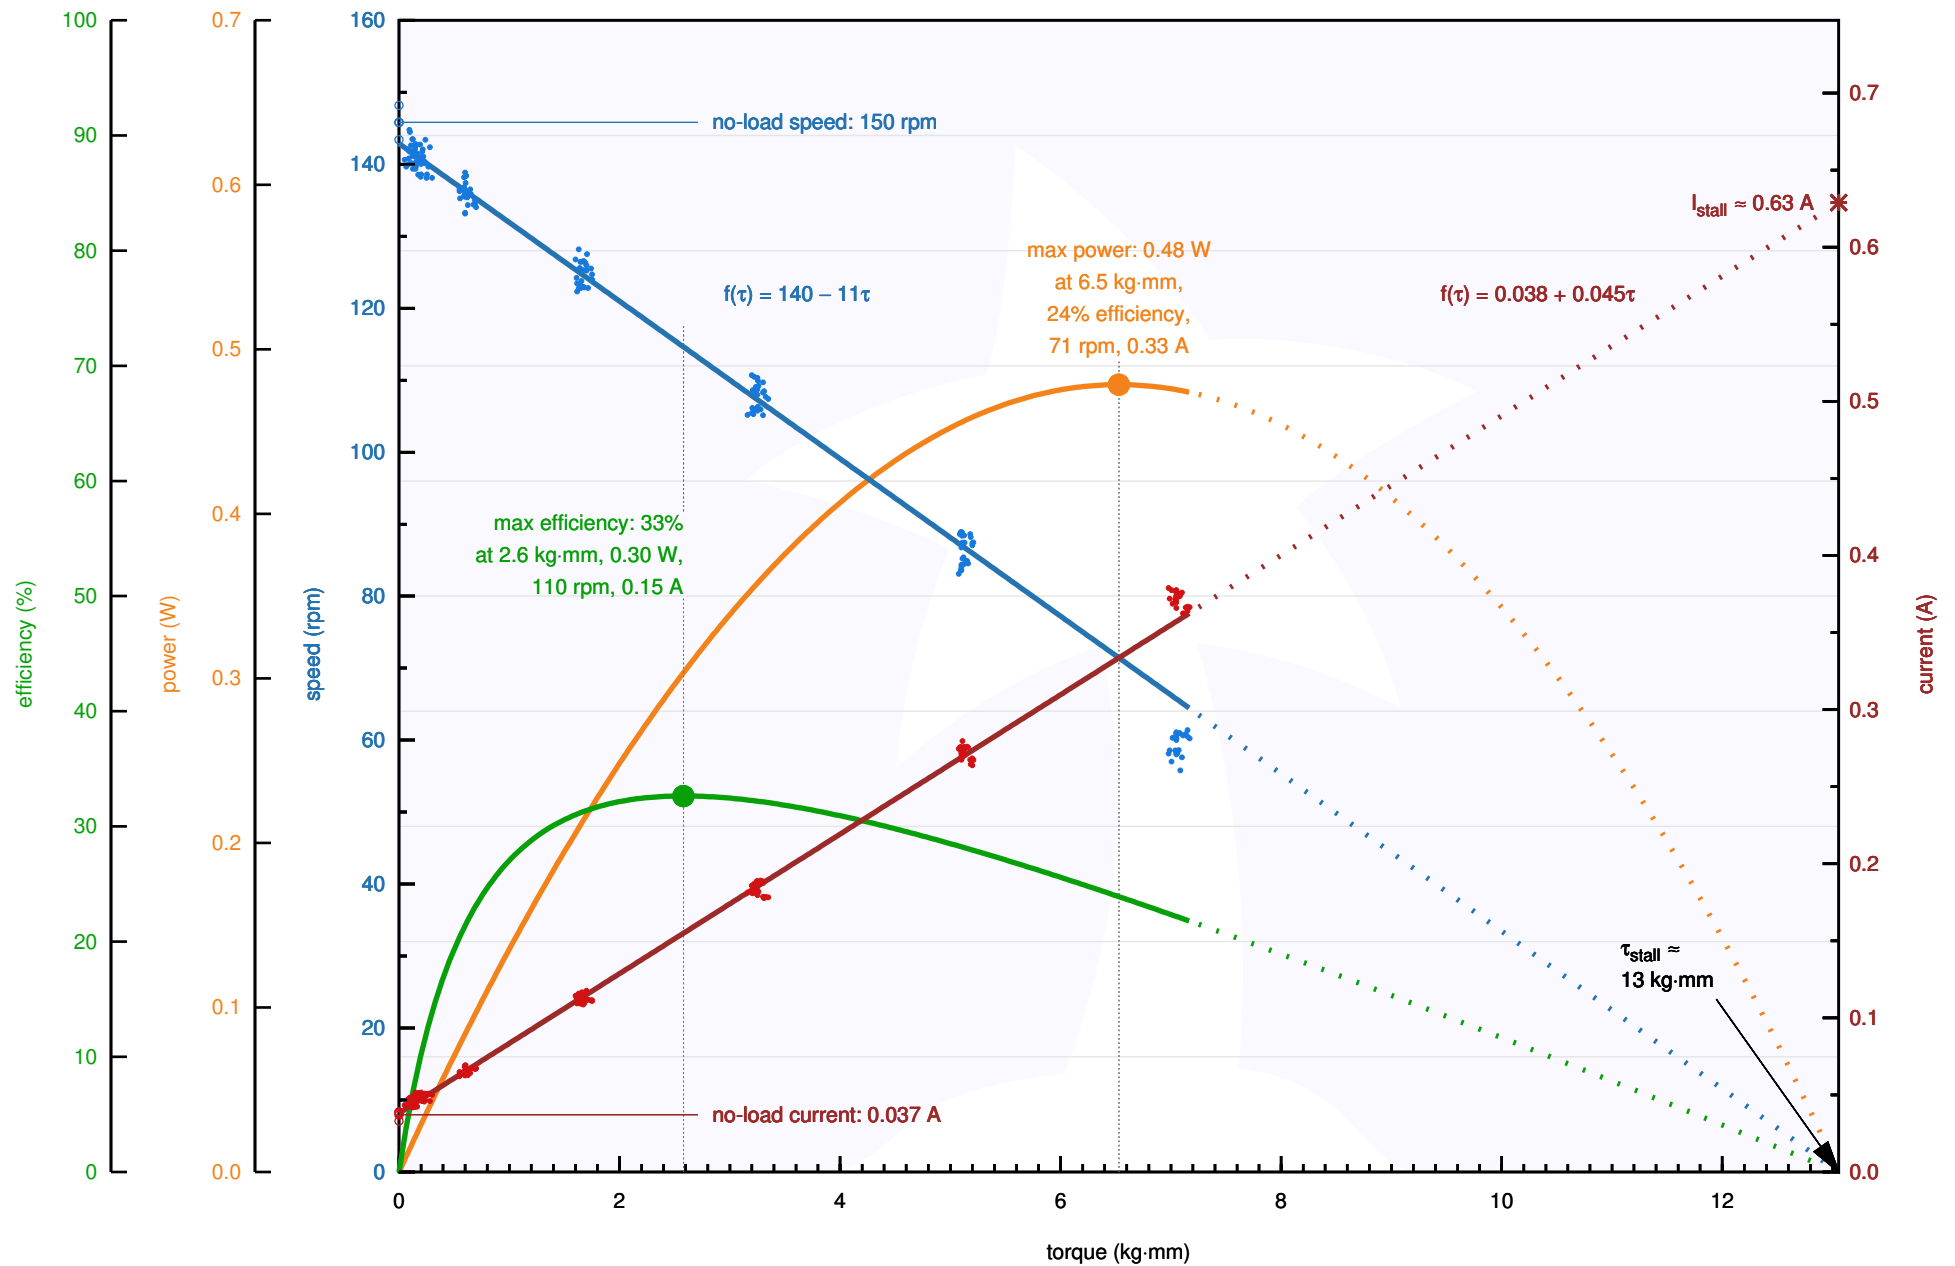


Pololu Items #2369, #2383 (210:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

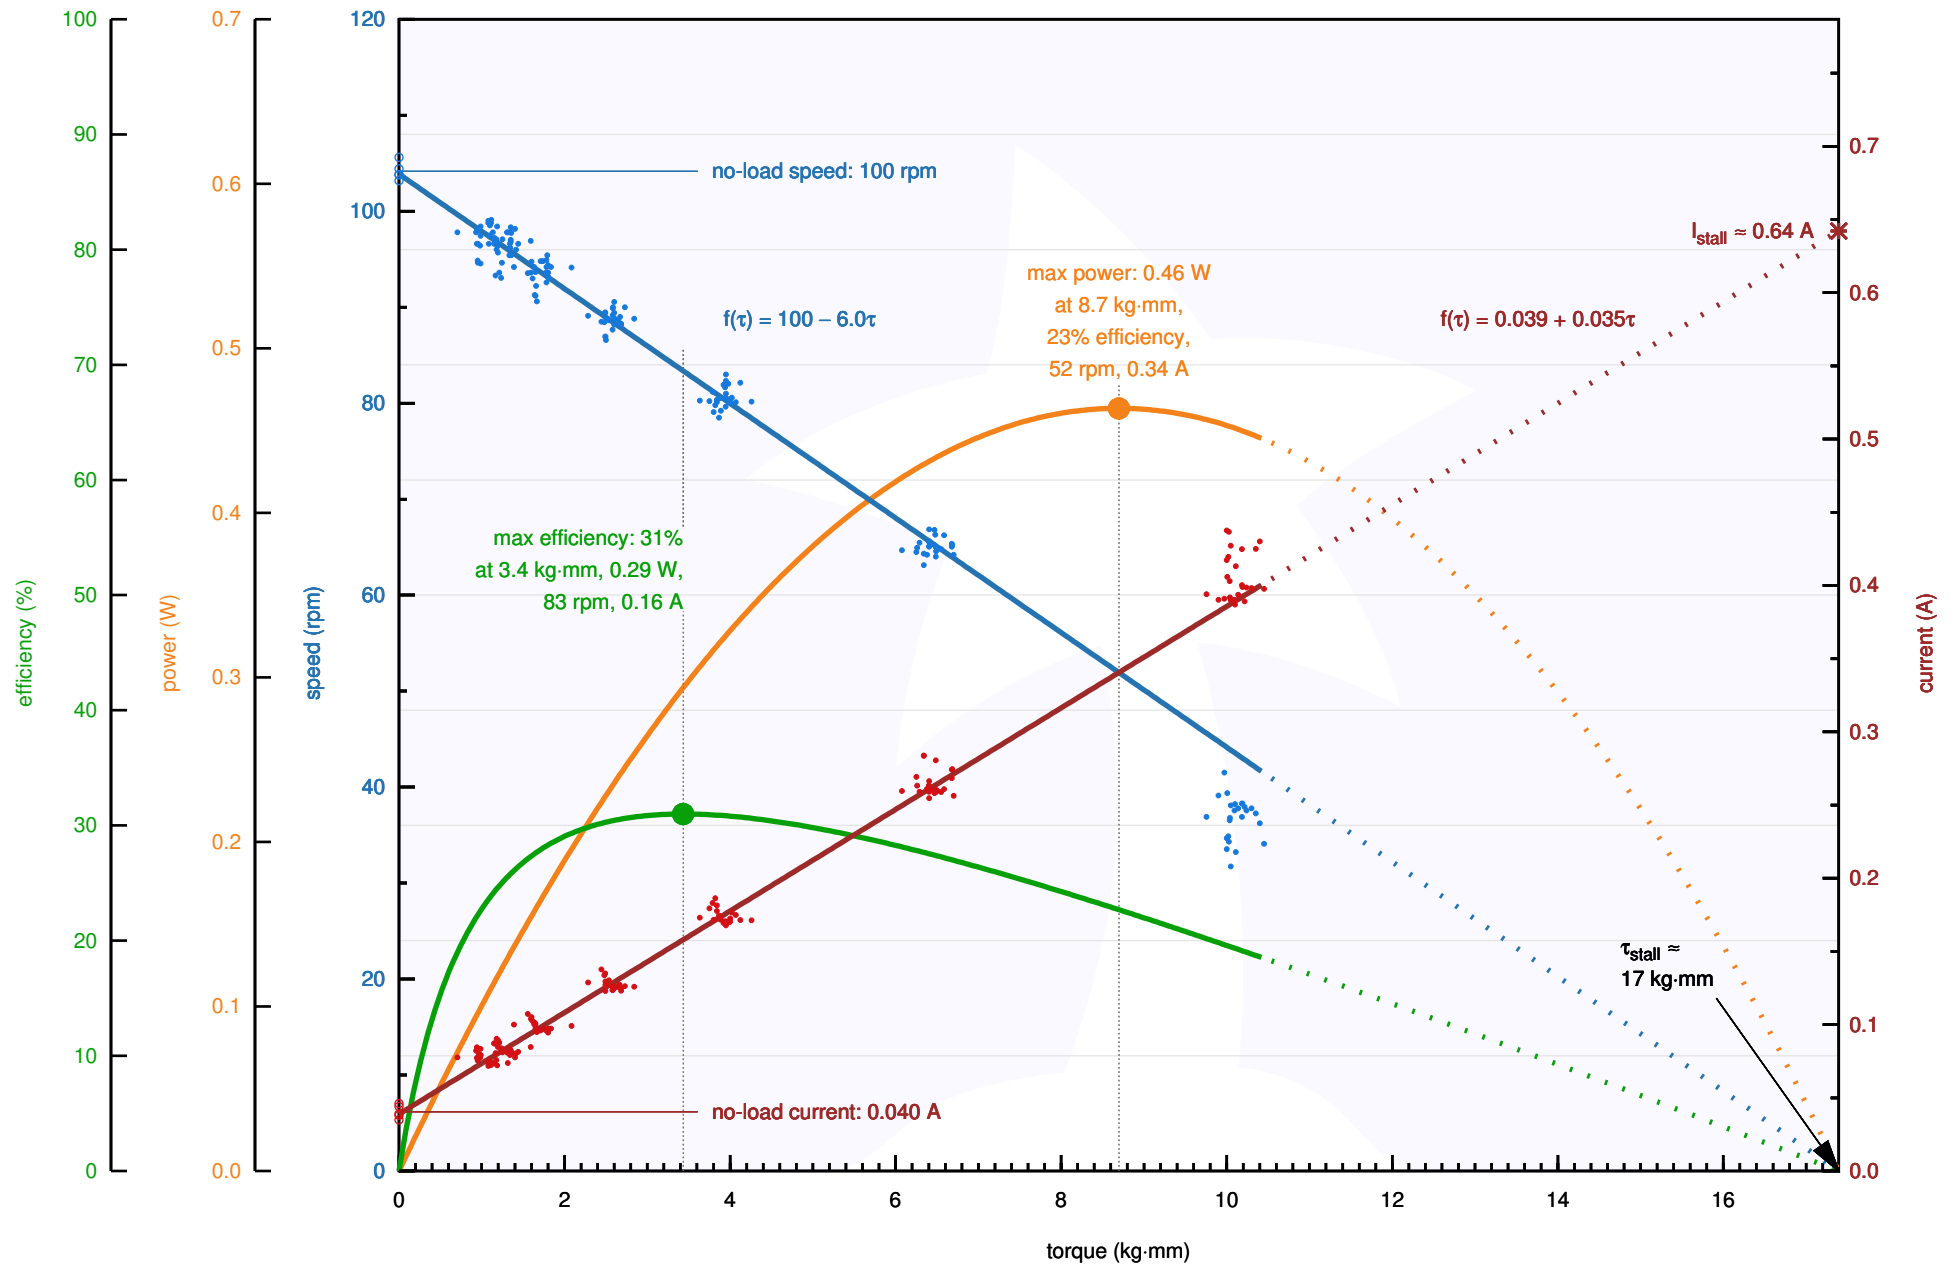


Pololu Items #2370, #2384 (250:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

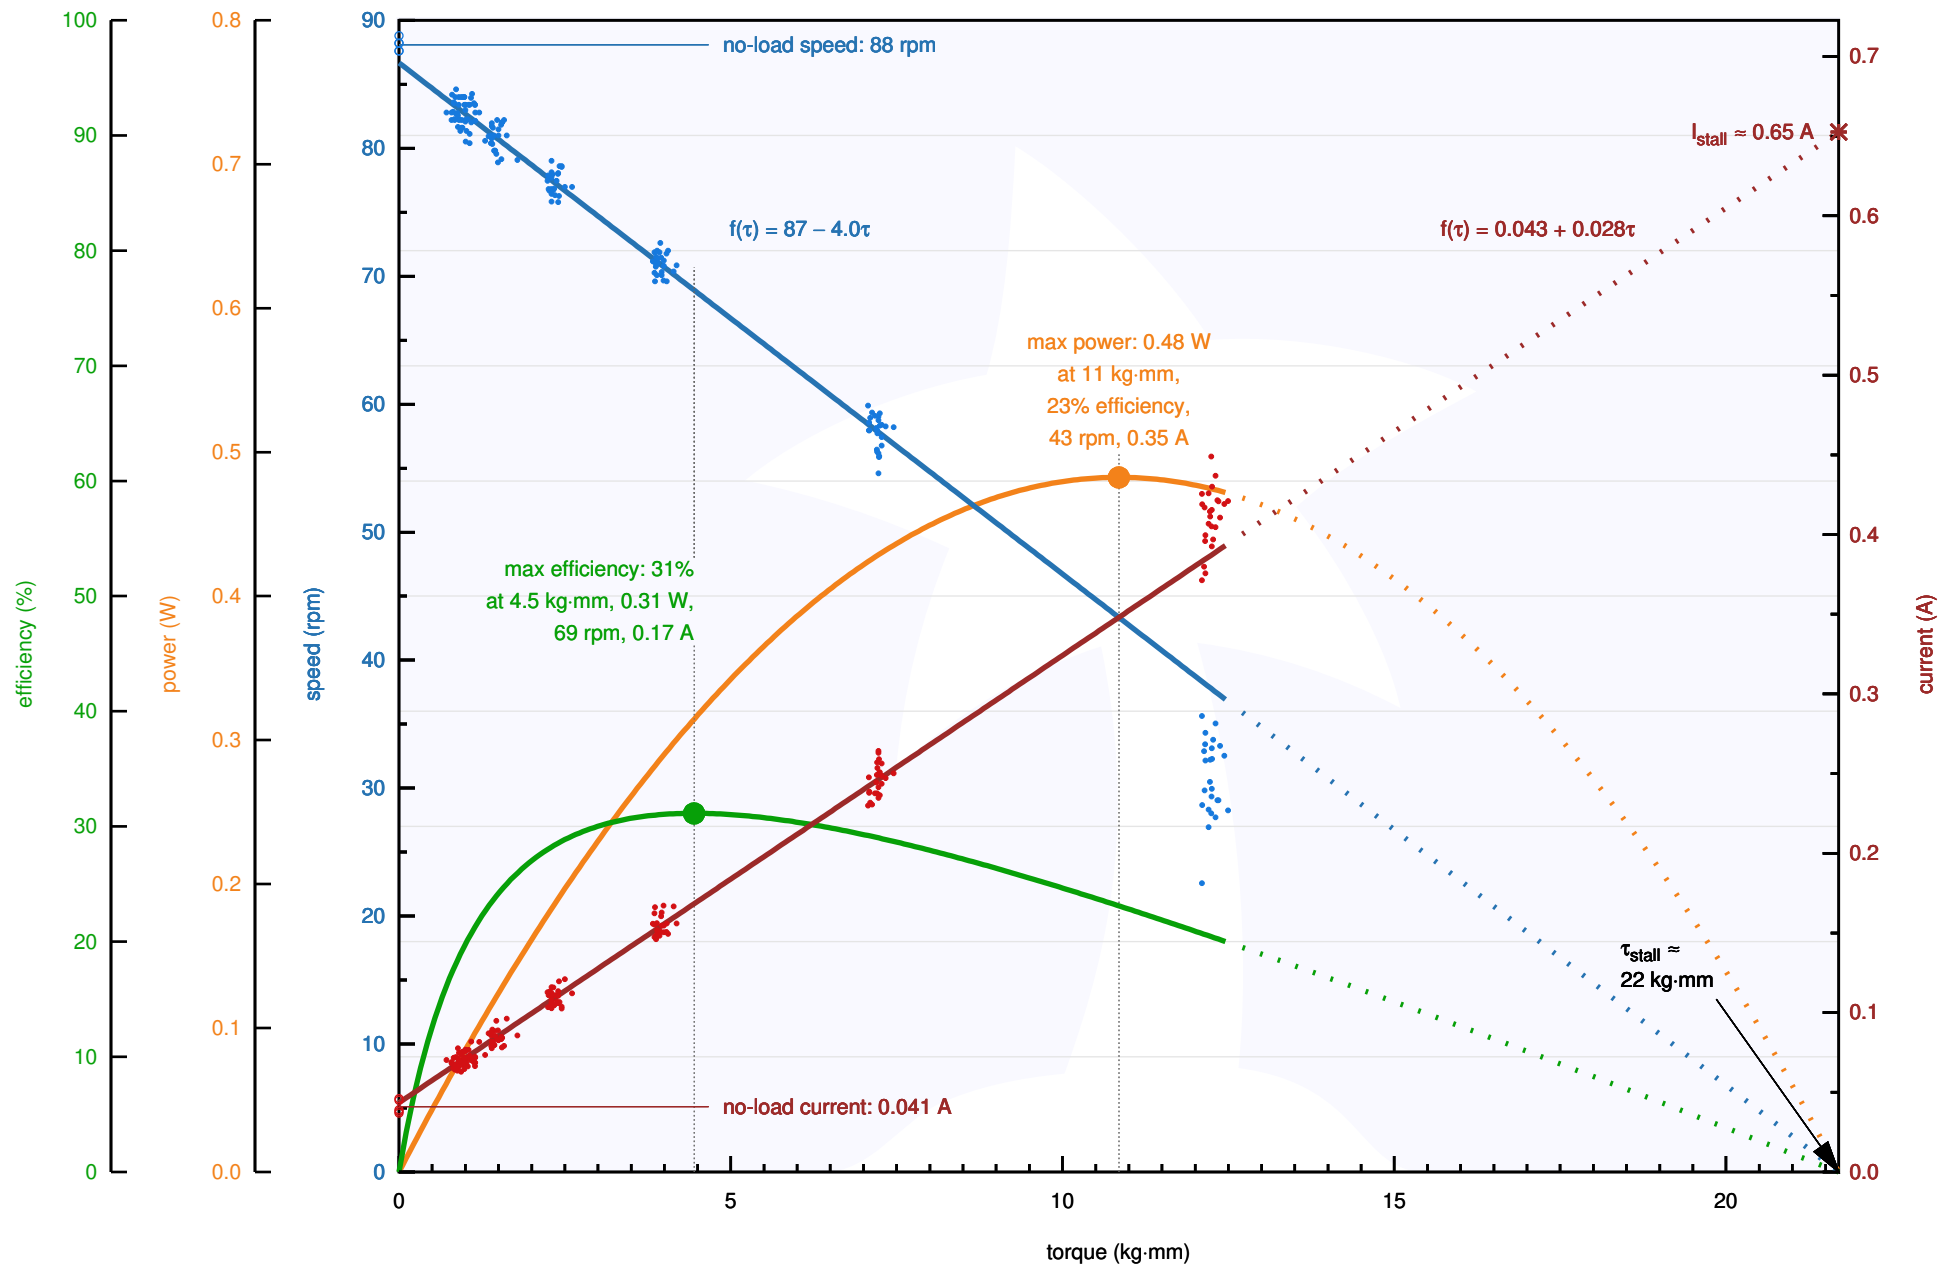


Pololu Items #2371, #2385 (298:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

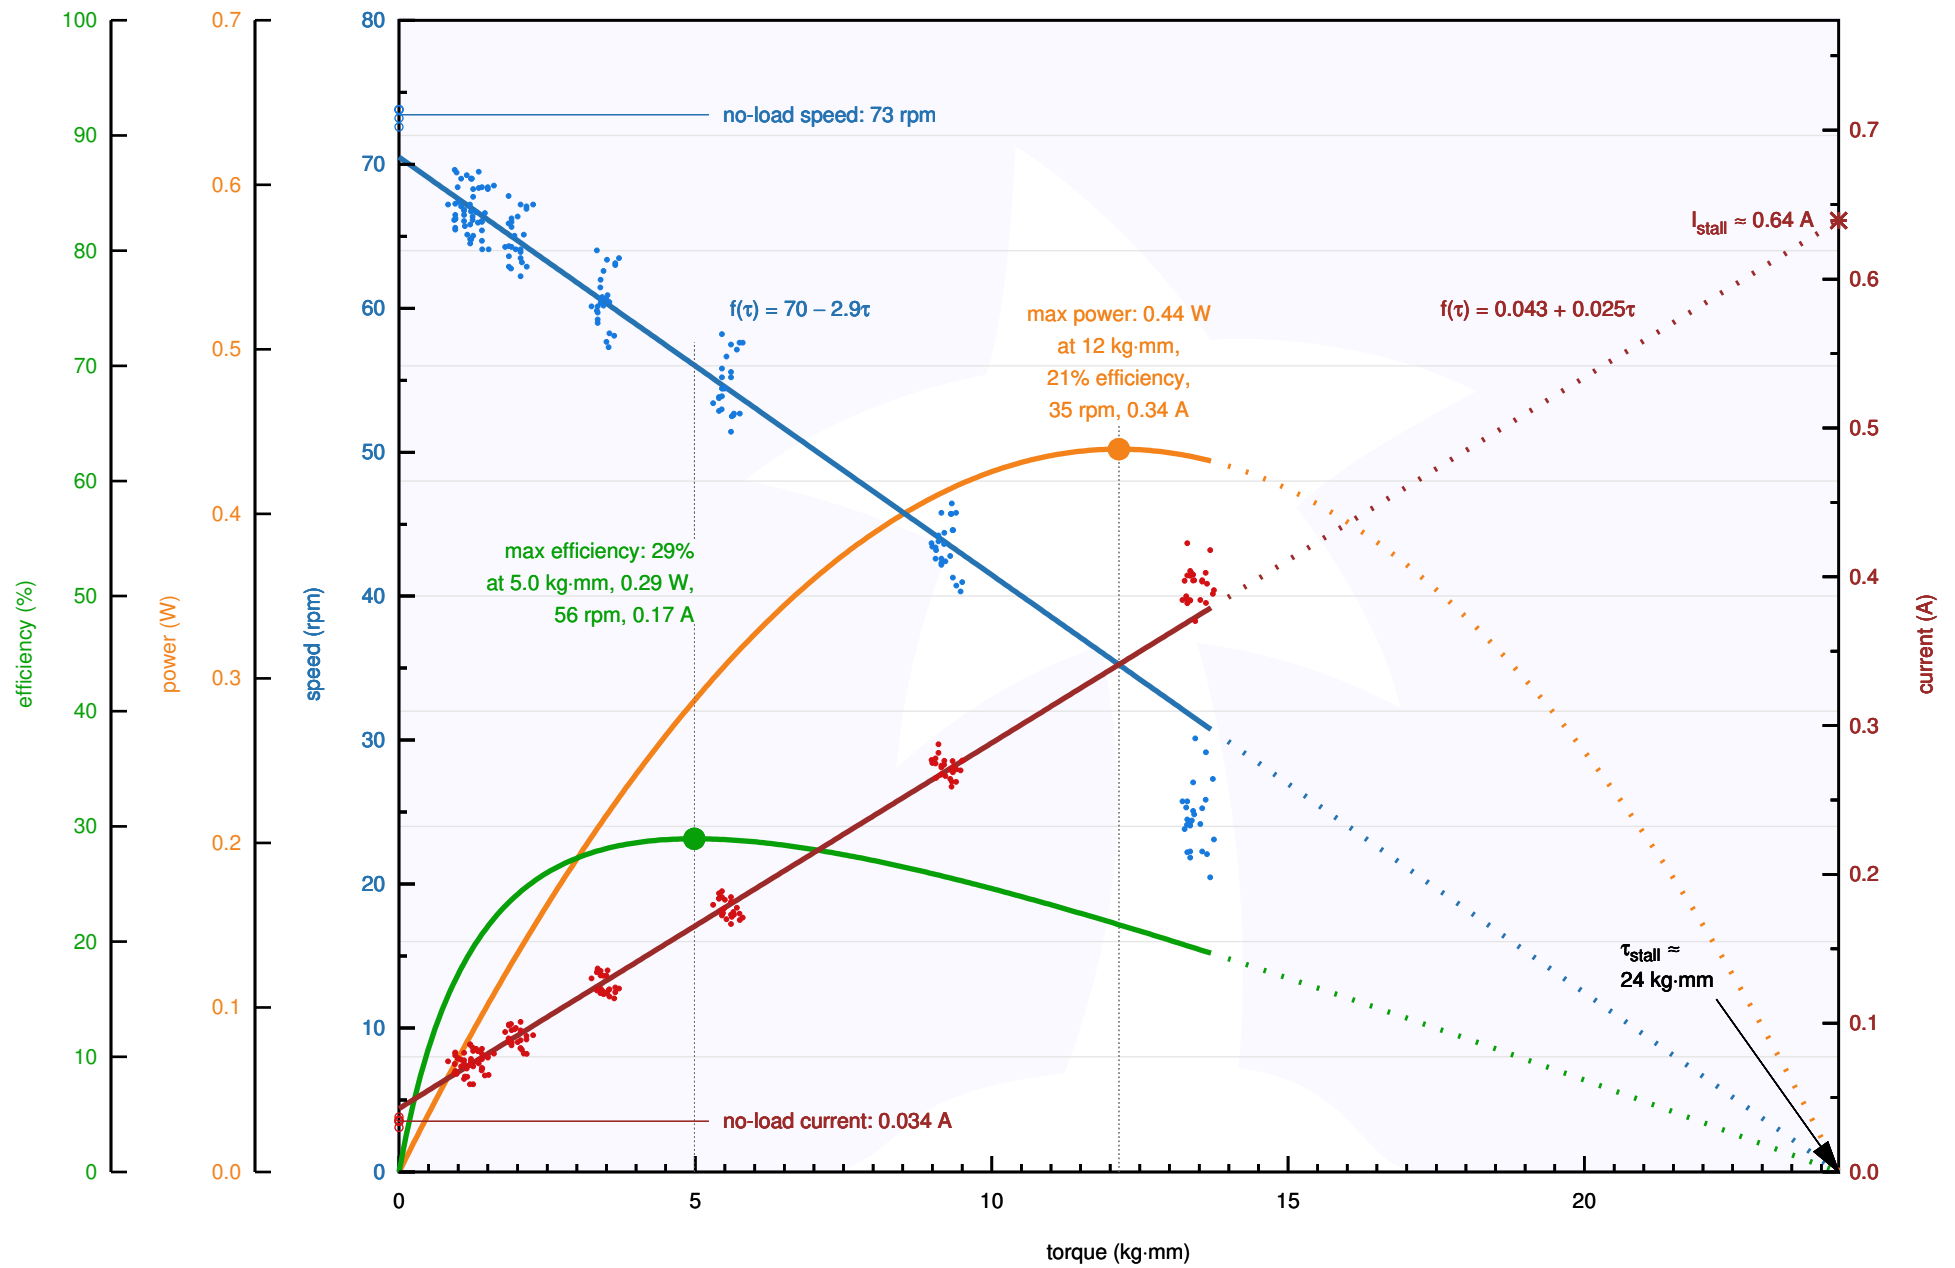


Pololu Items #2372, #3059 (1000:1 Micro Metal Gearmotor MP 6V) Performance at 6 V

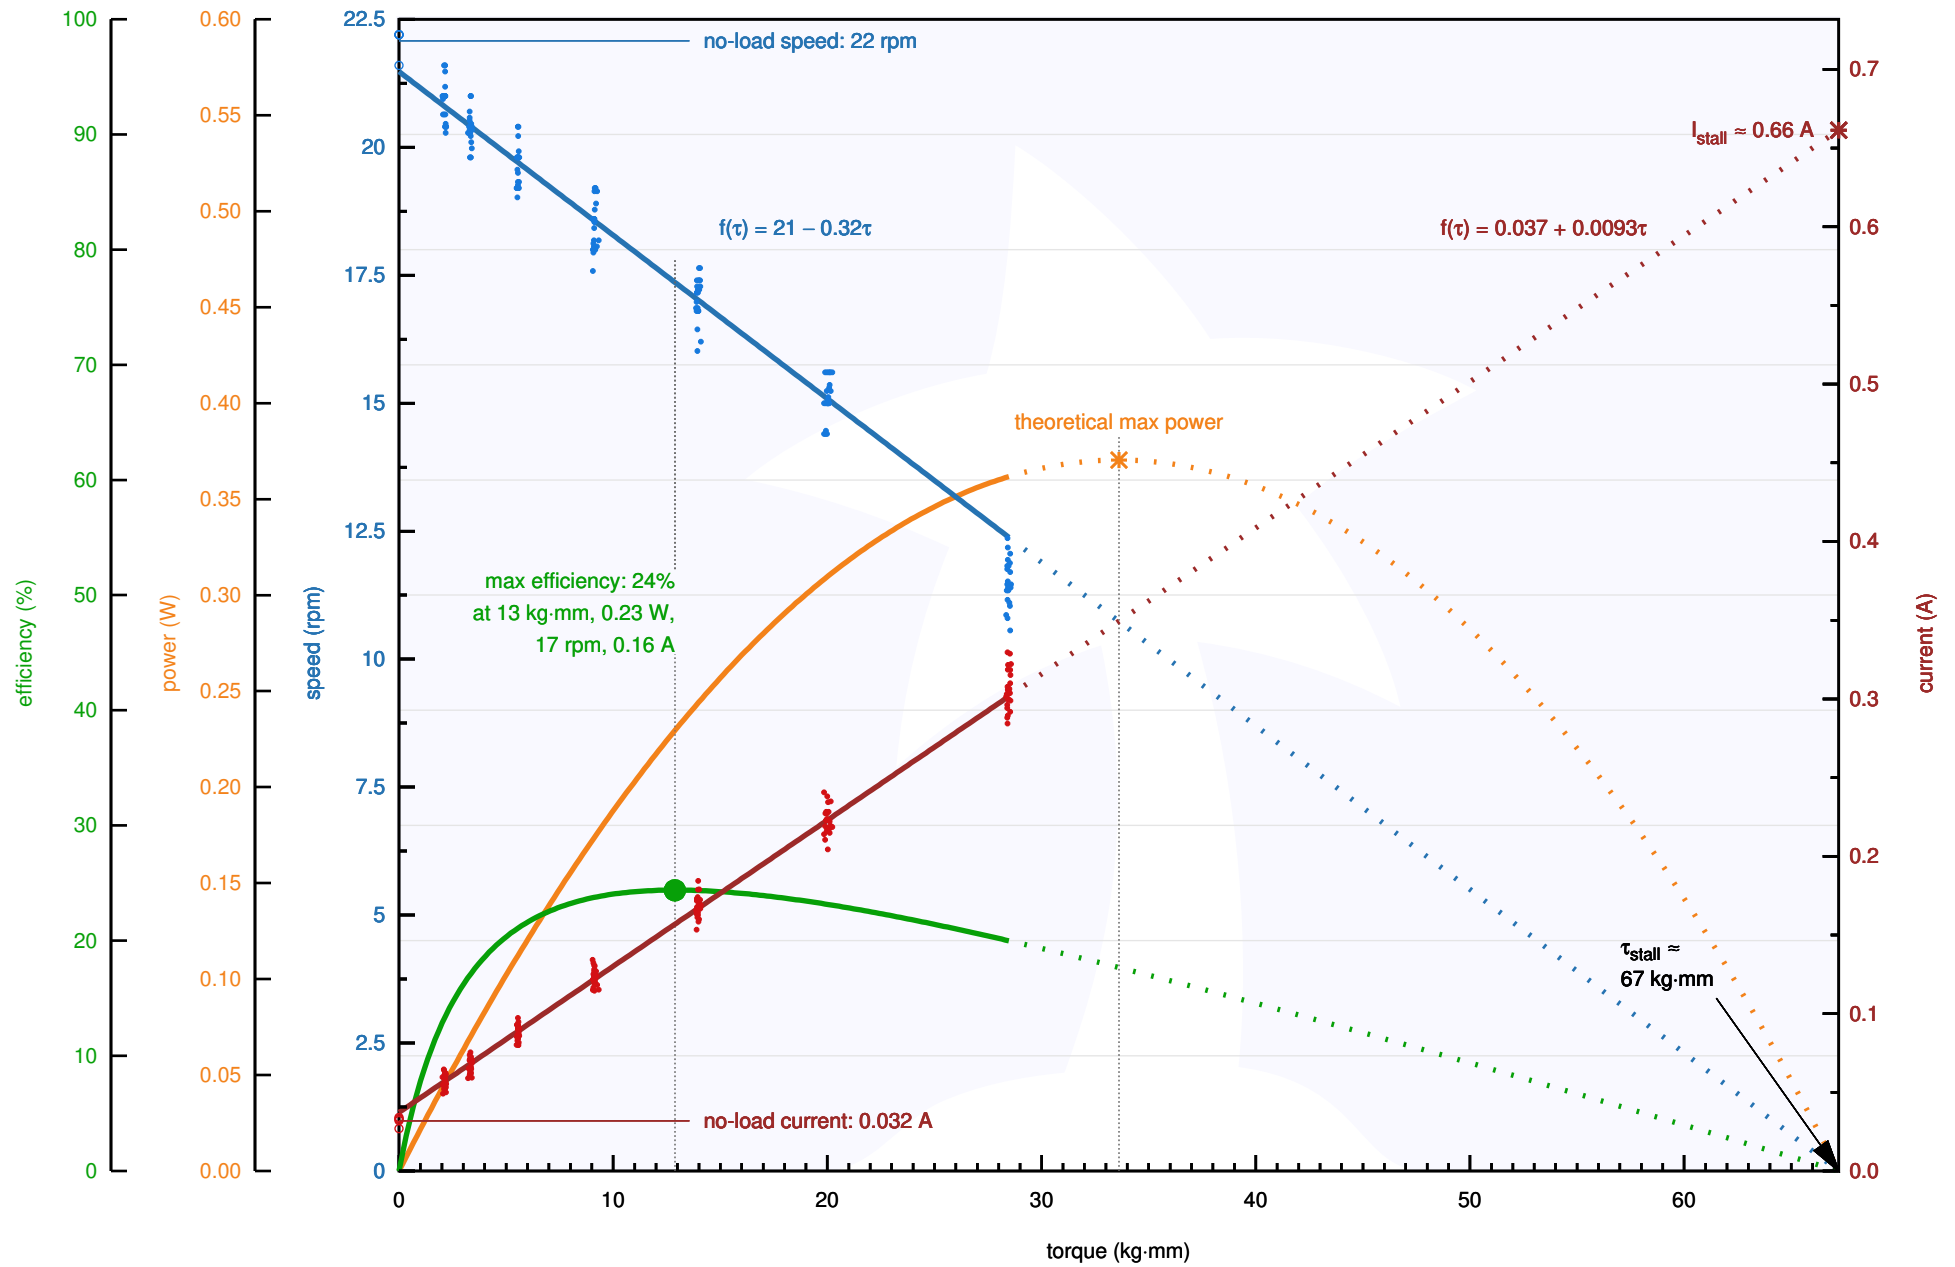


Pololu Items #999, #2211 (10:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

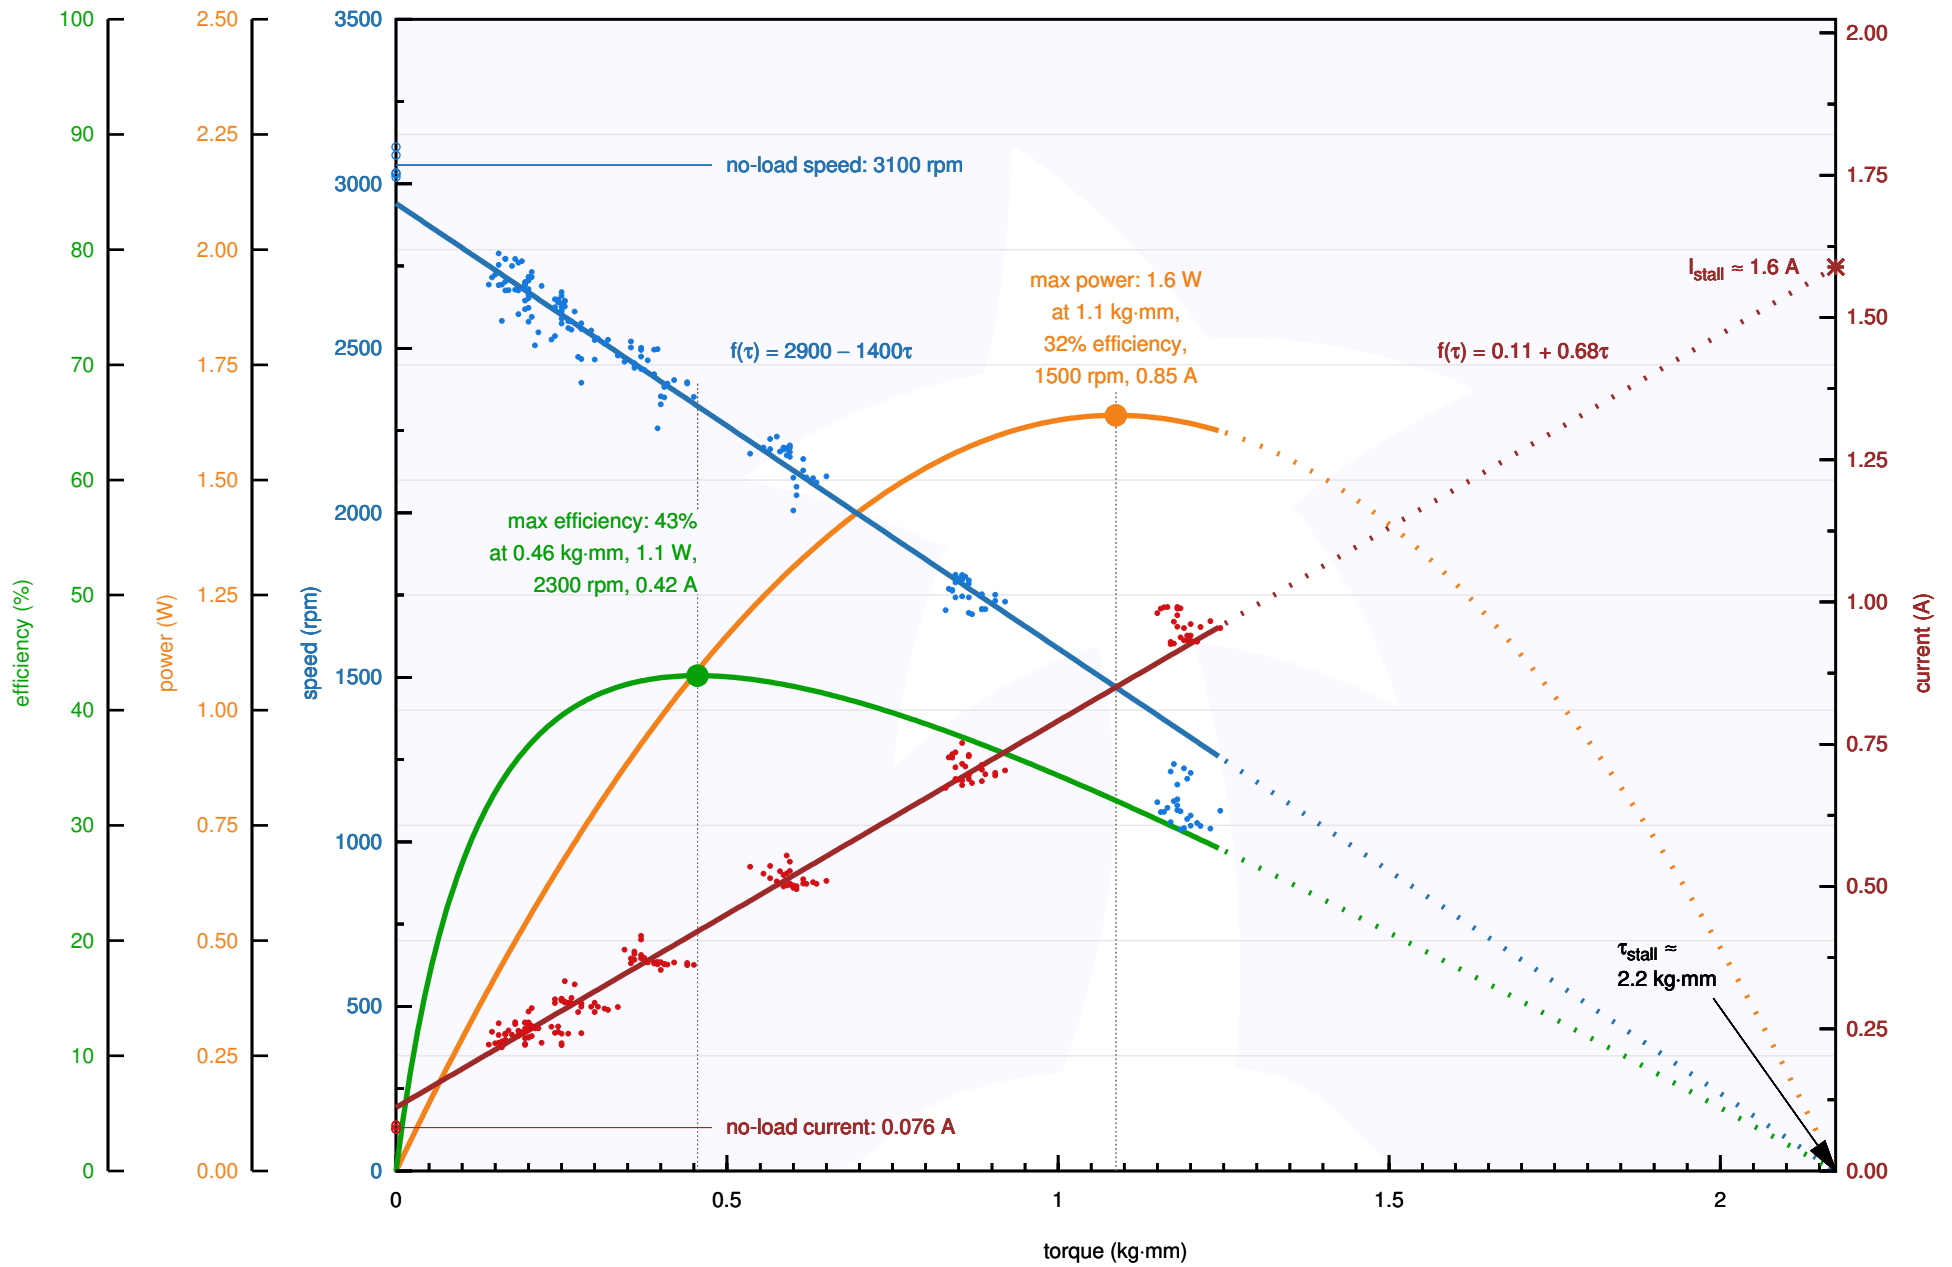


Pololu Items #1093, #2212 (30:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

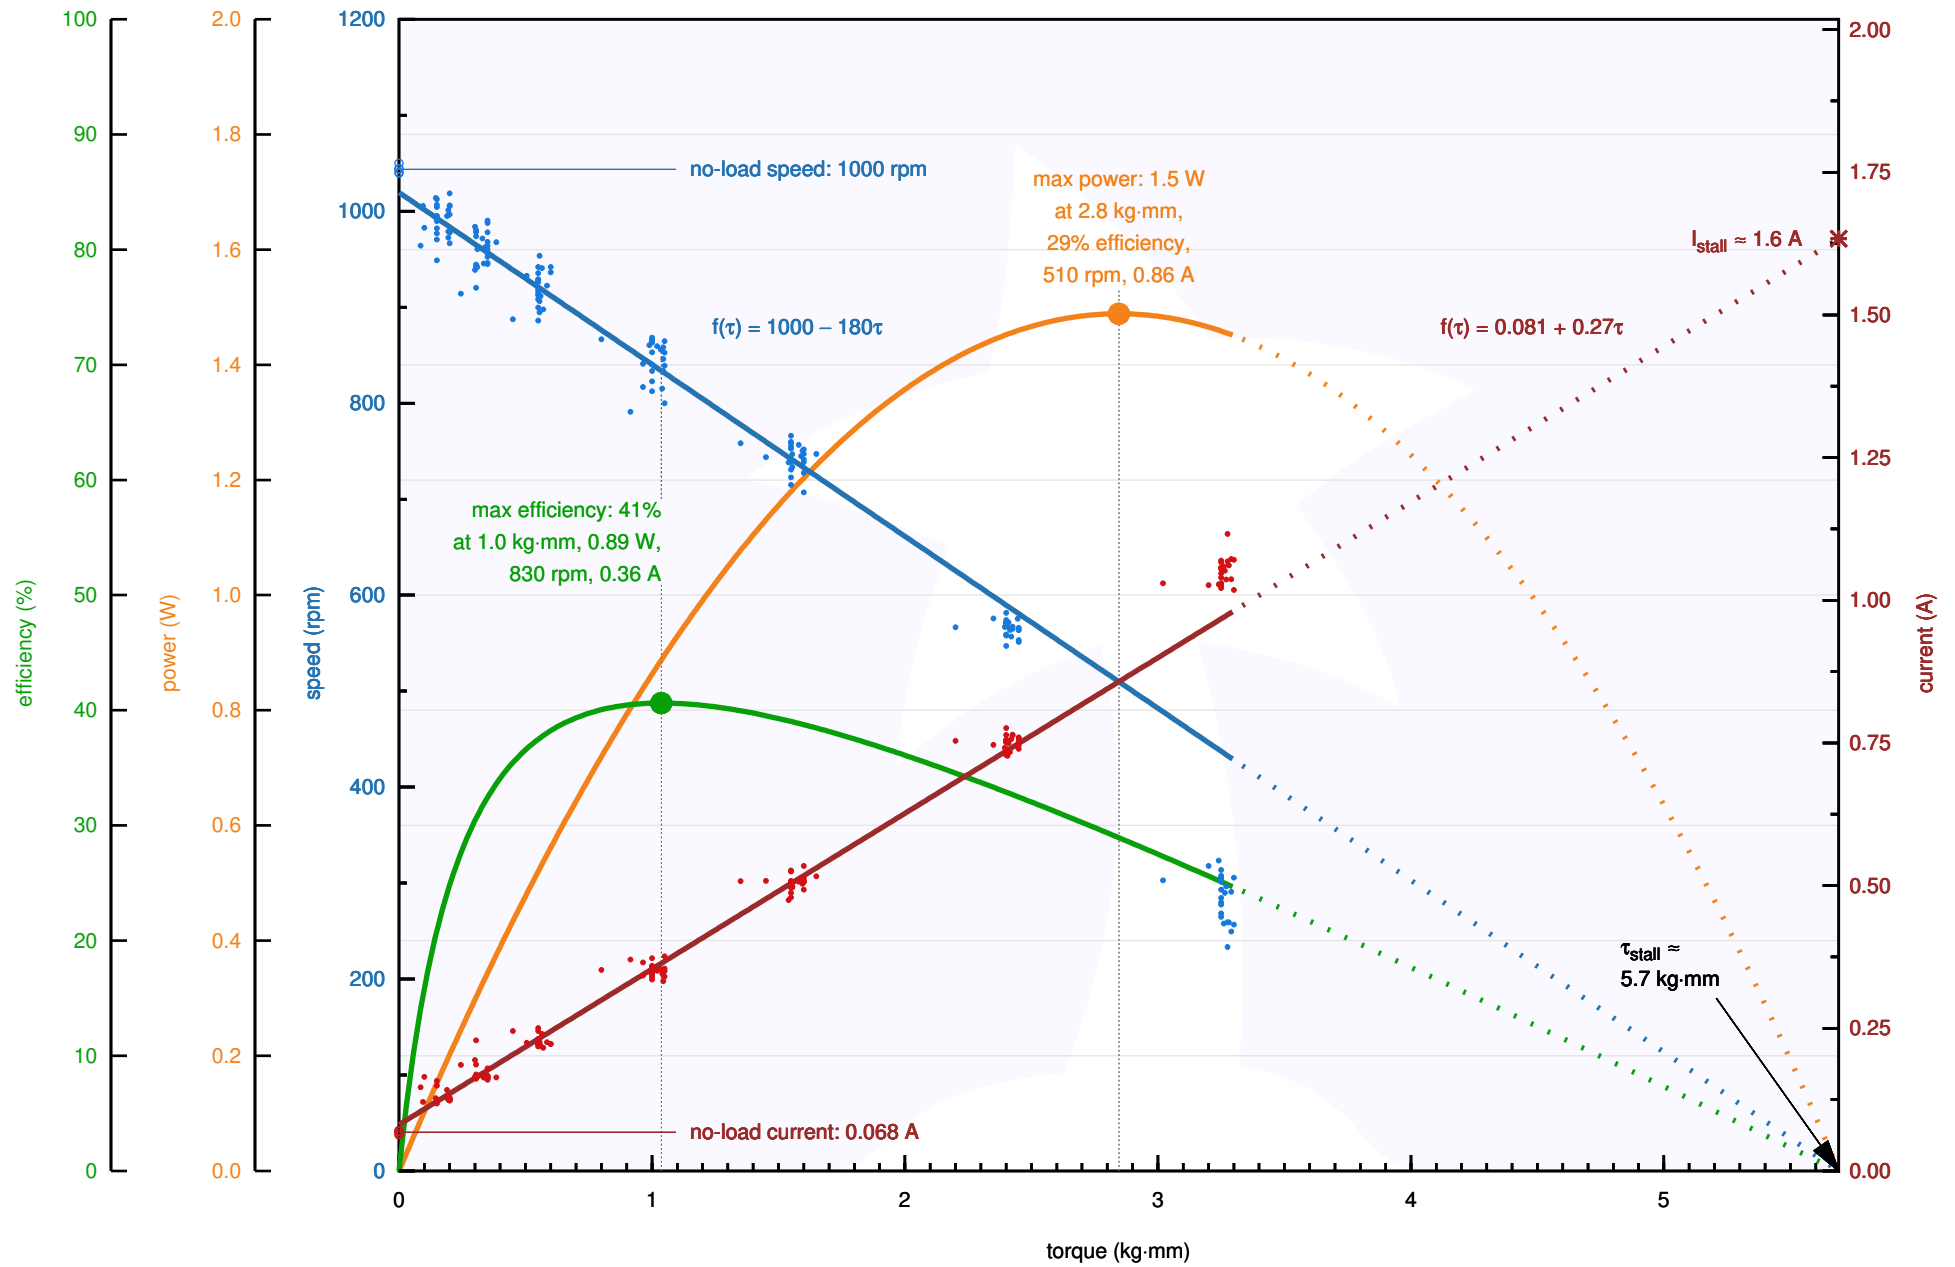


Pololu Items #998, #2213 (50:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

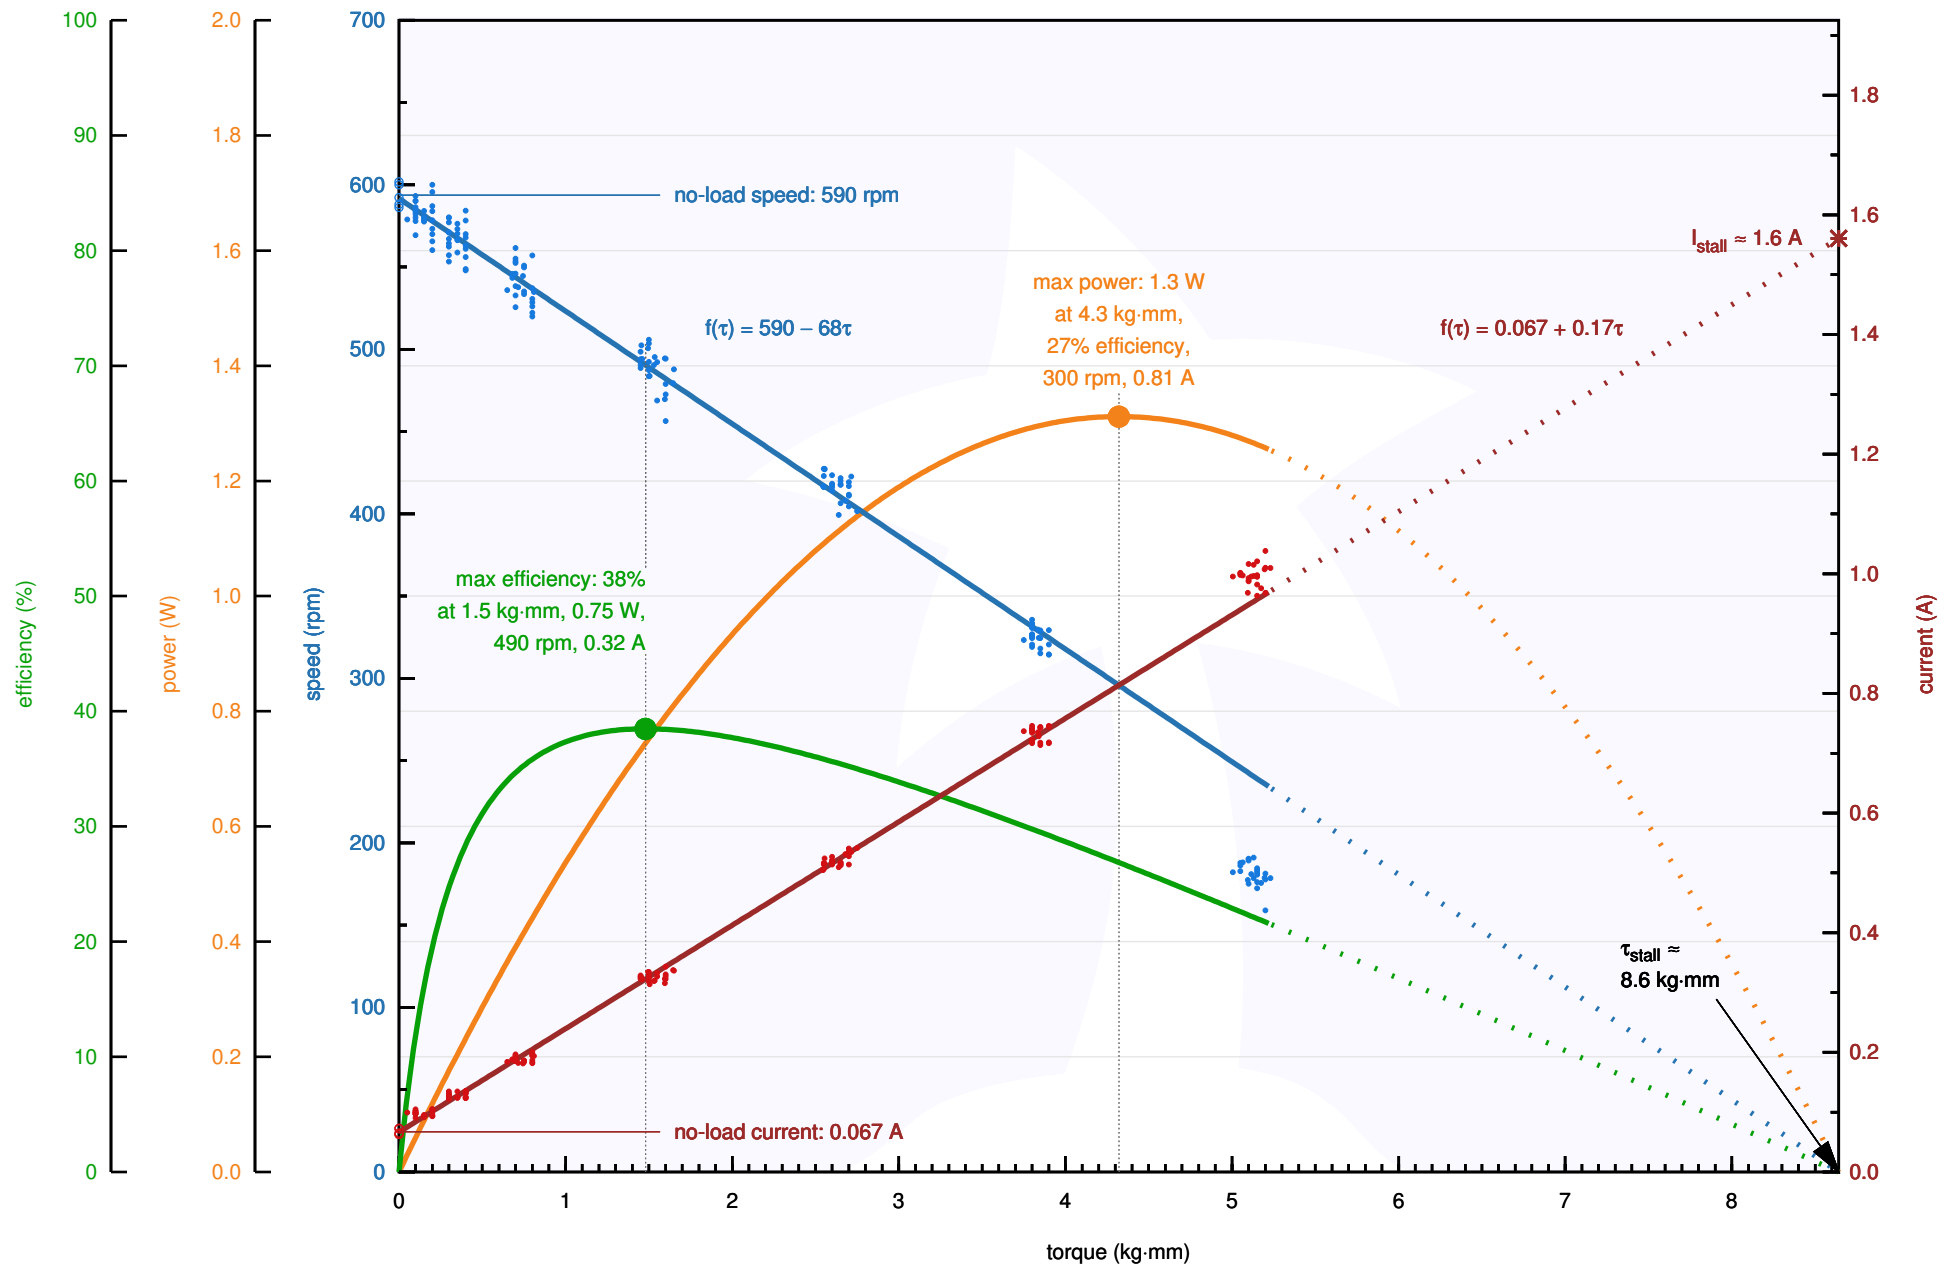


Pololu Items #2361, #2215 (75:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

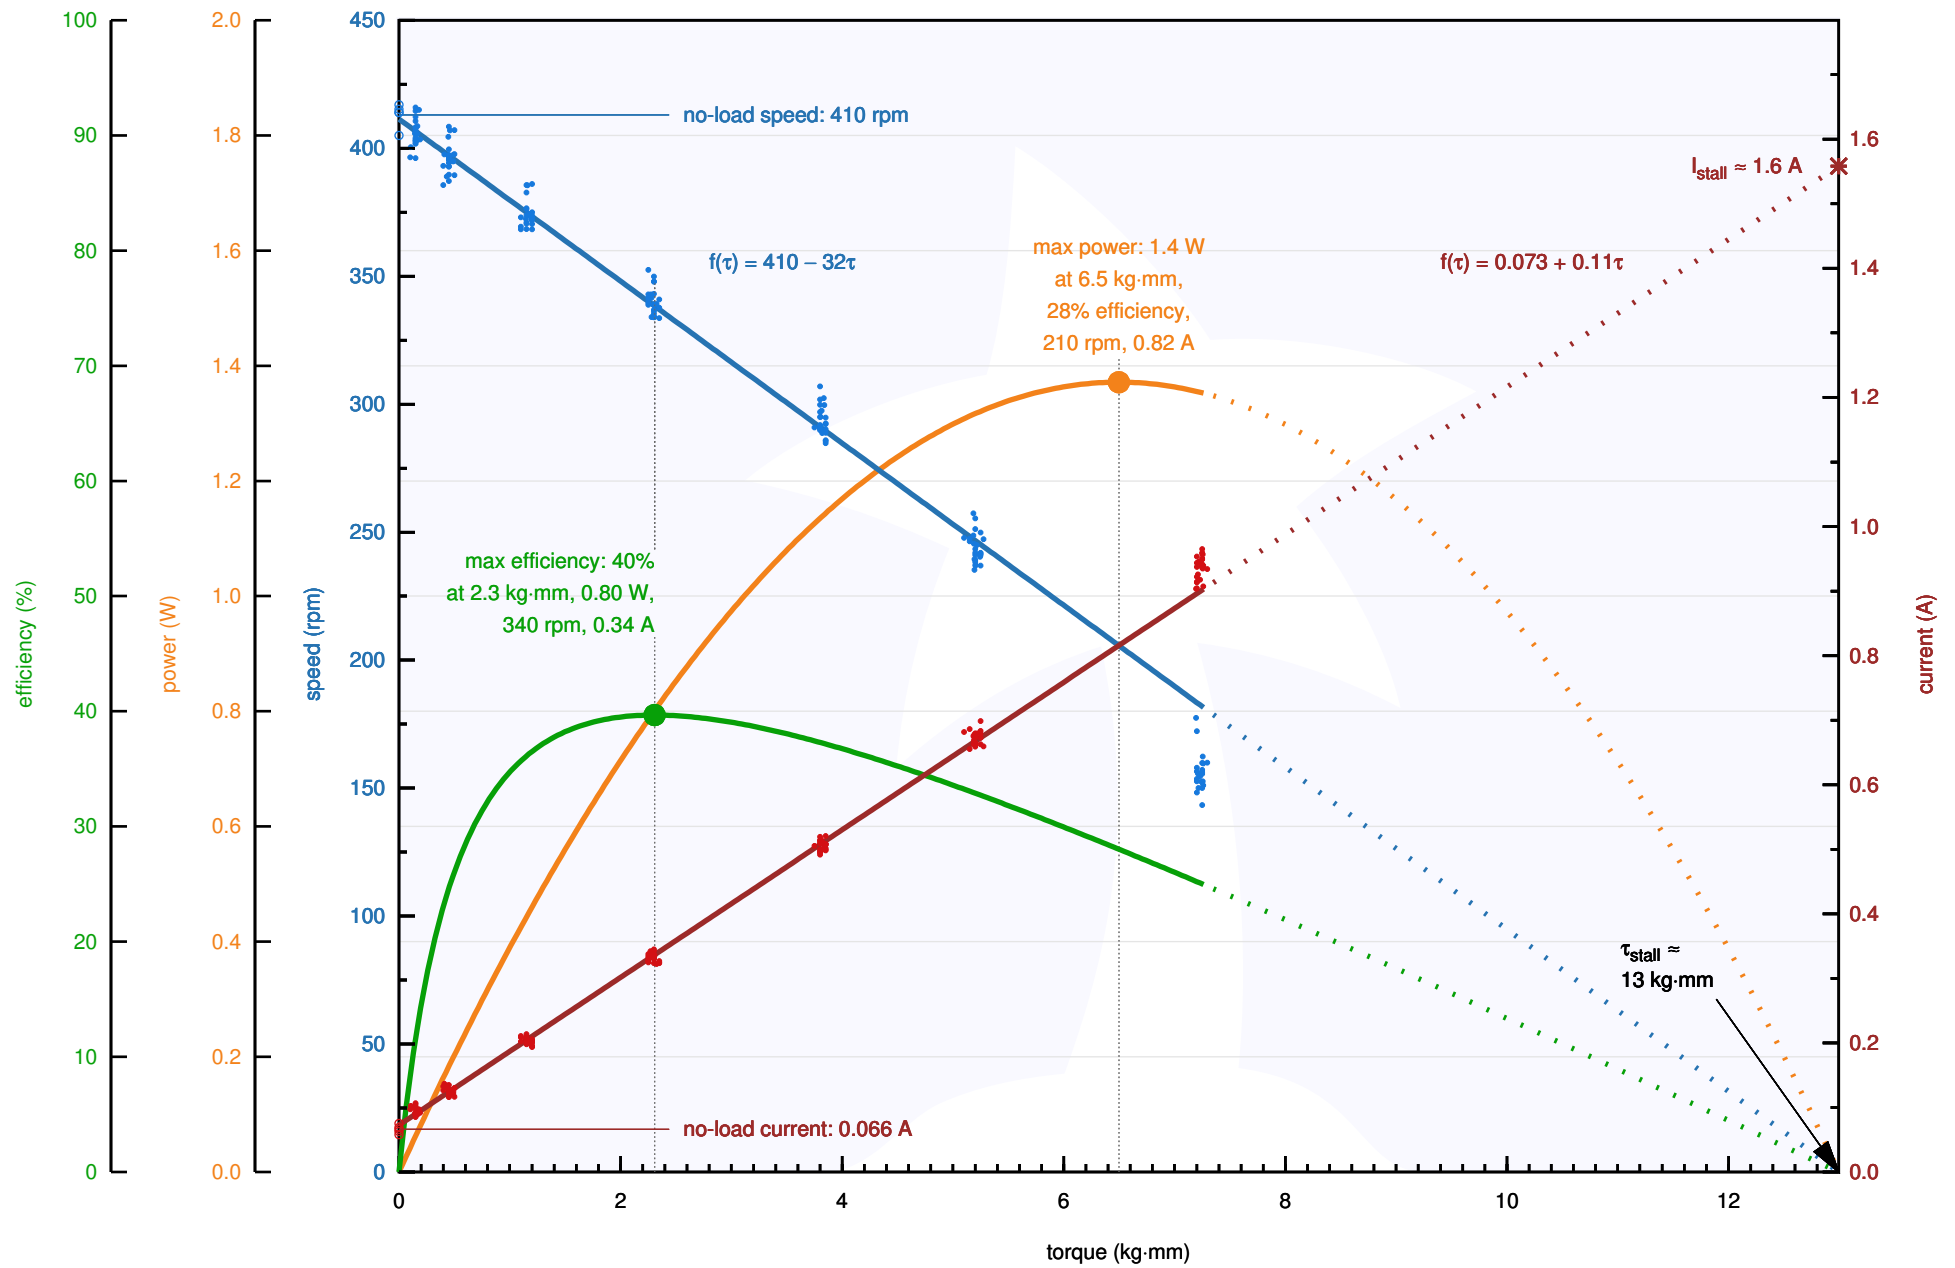


Pololu Items #1101, #2214 (100:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

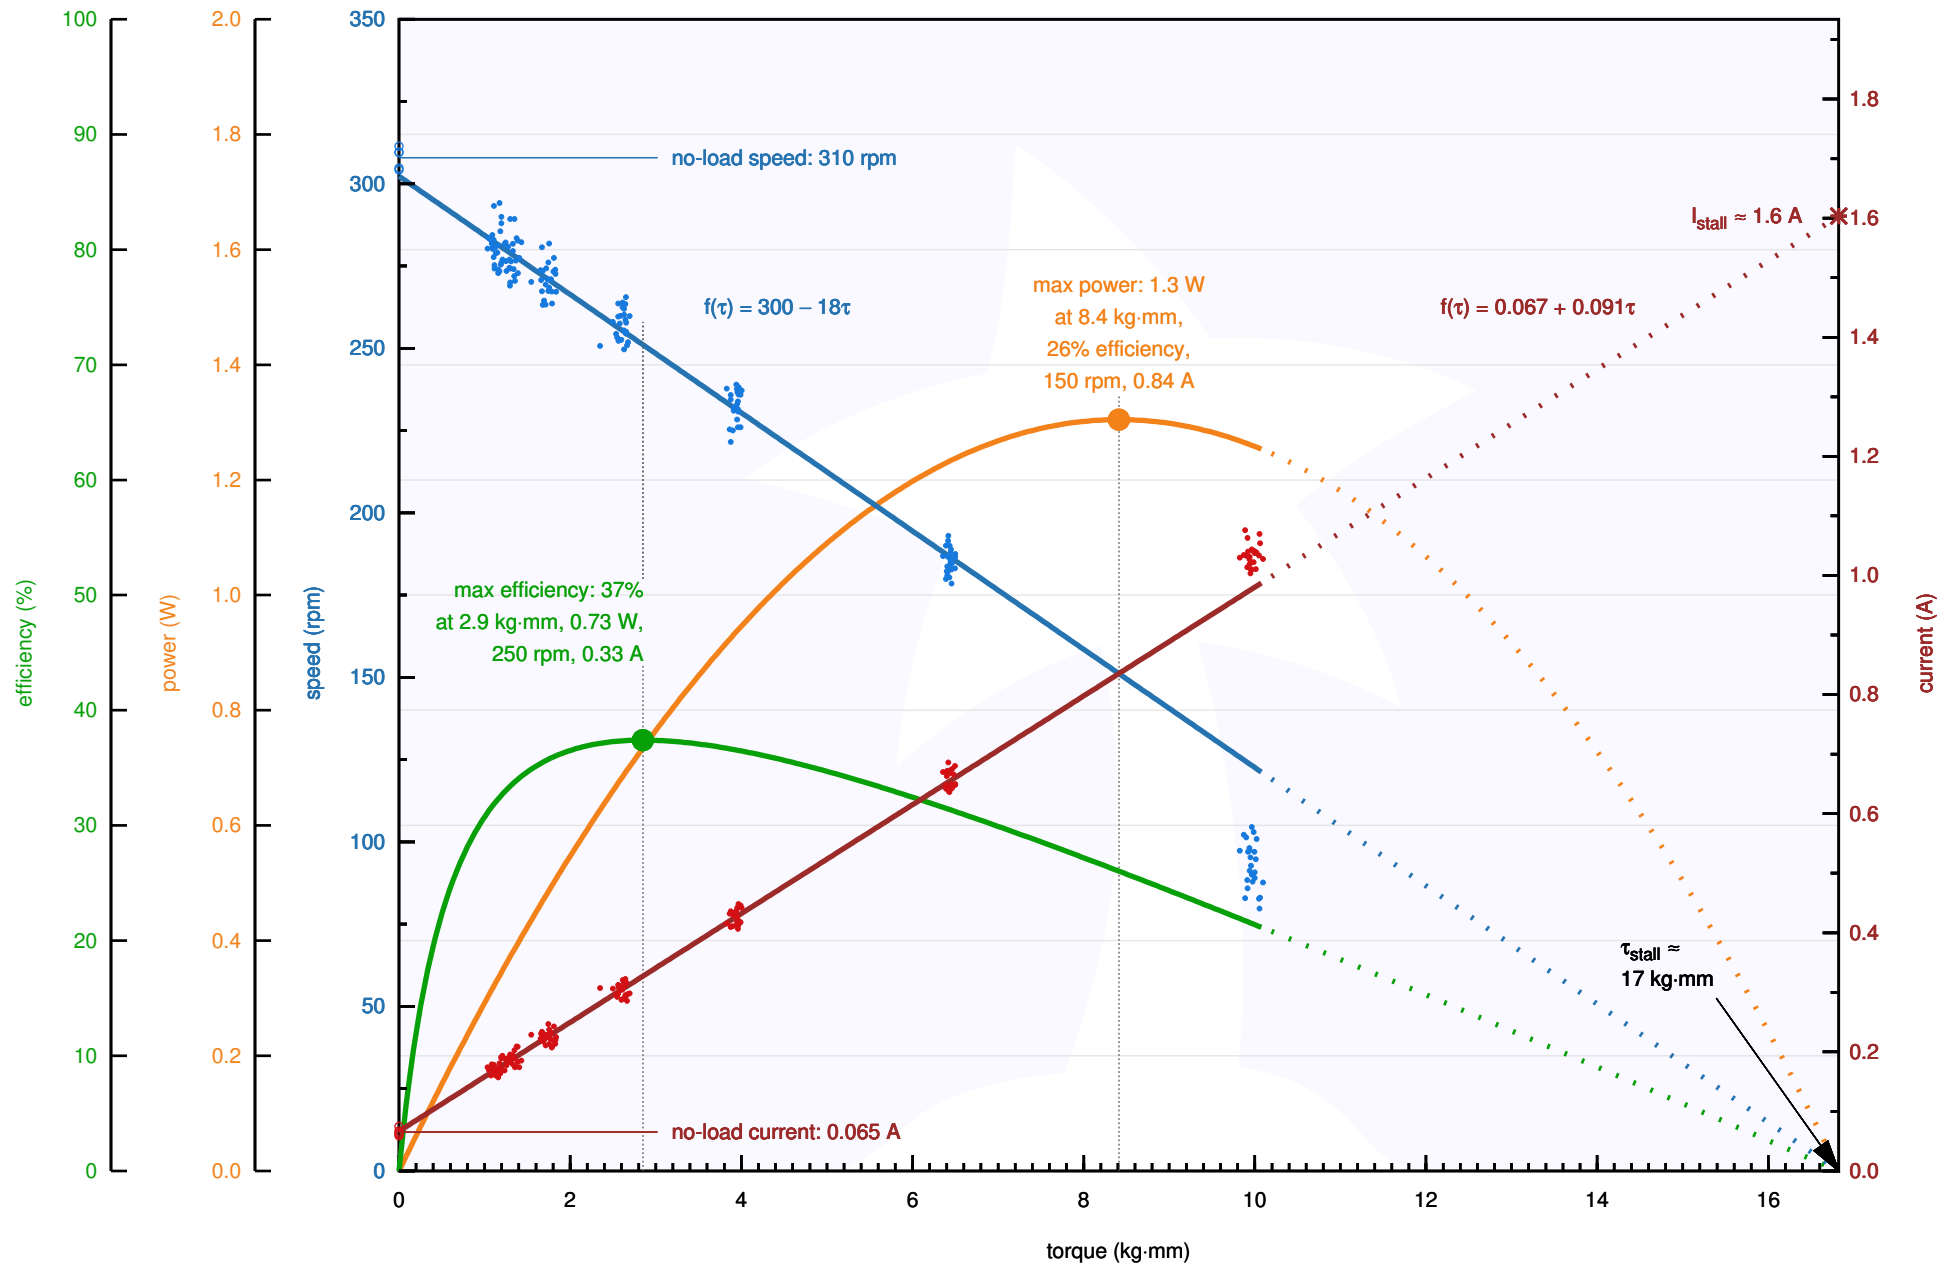


Pololu Items #997, #2386 (150:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

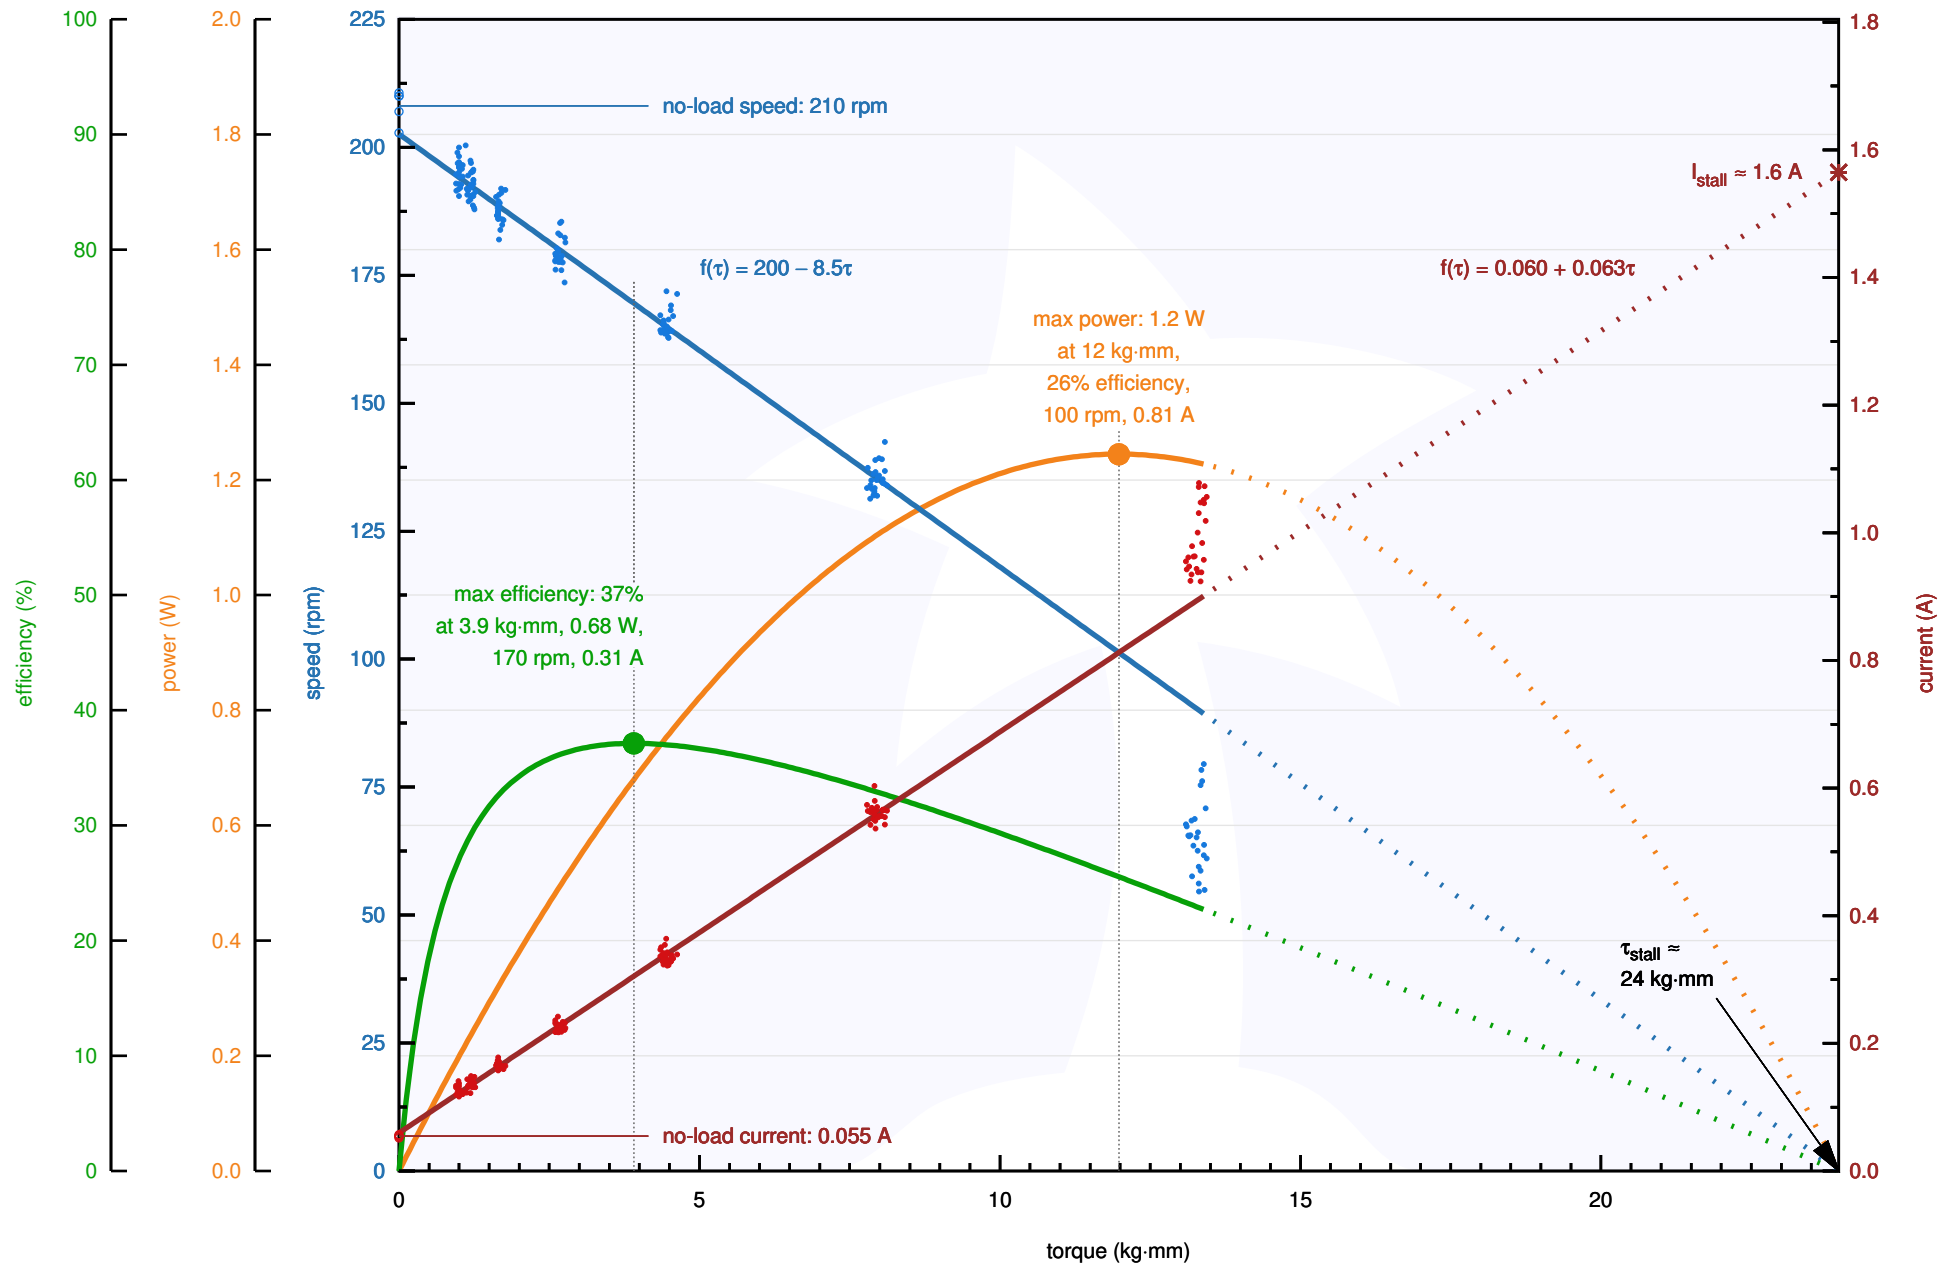


Pololu Items #996, #2216 (210:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

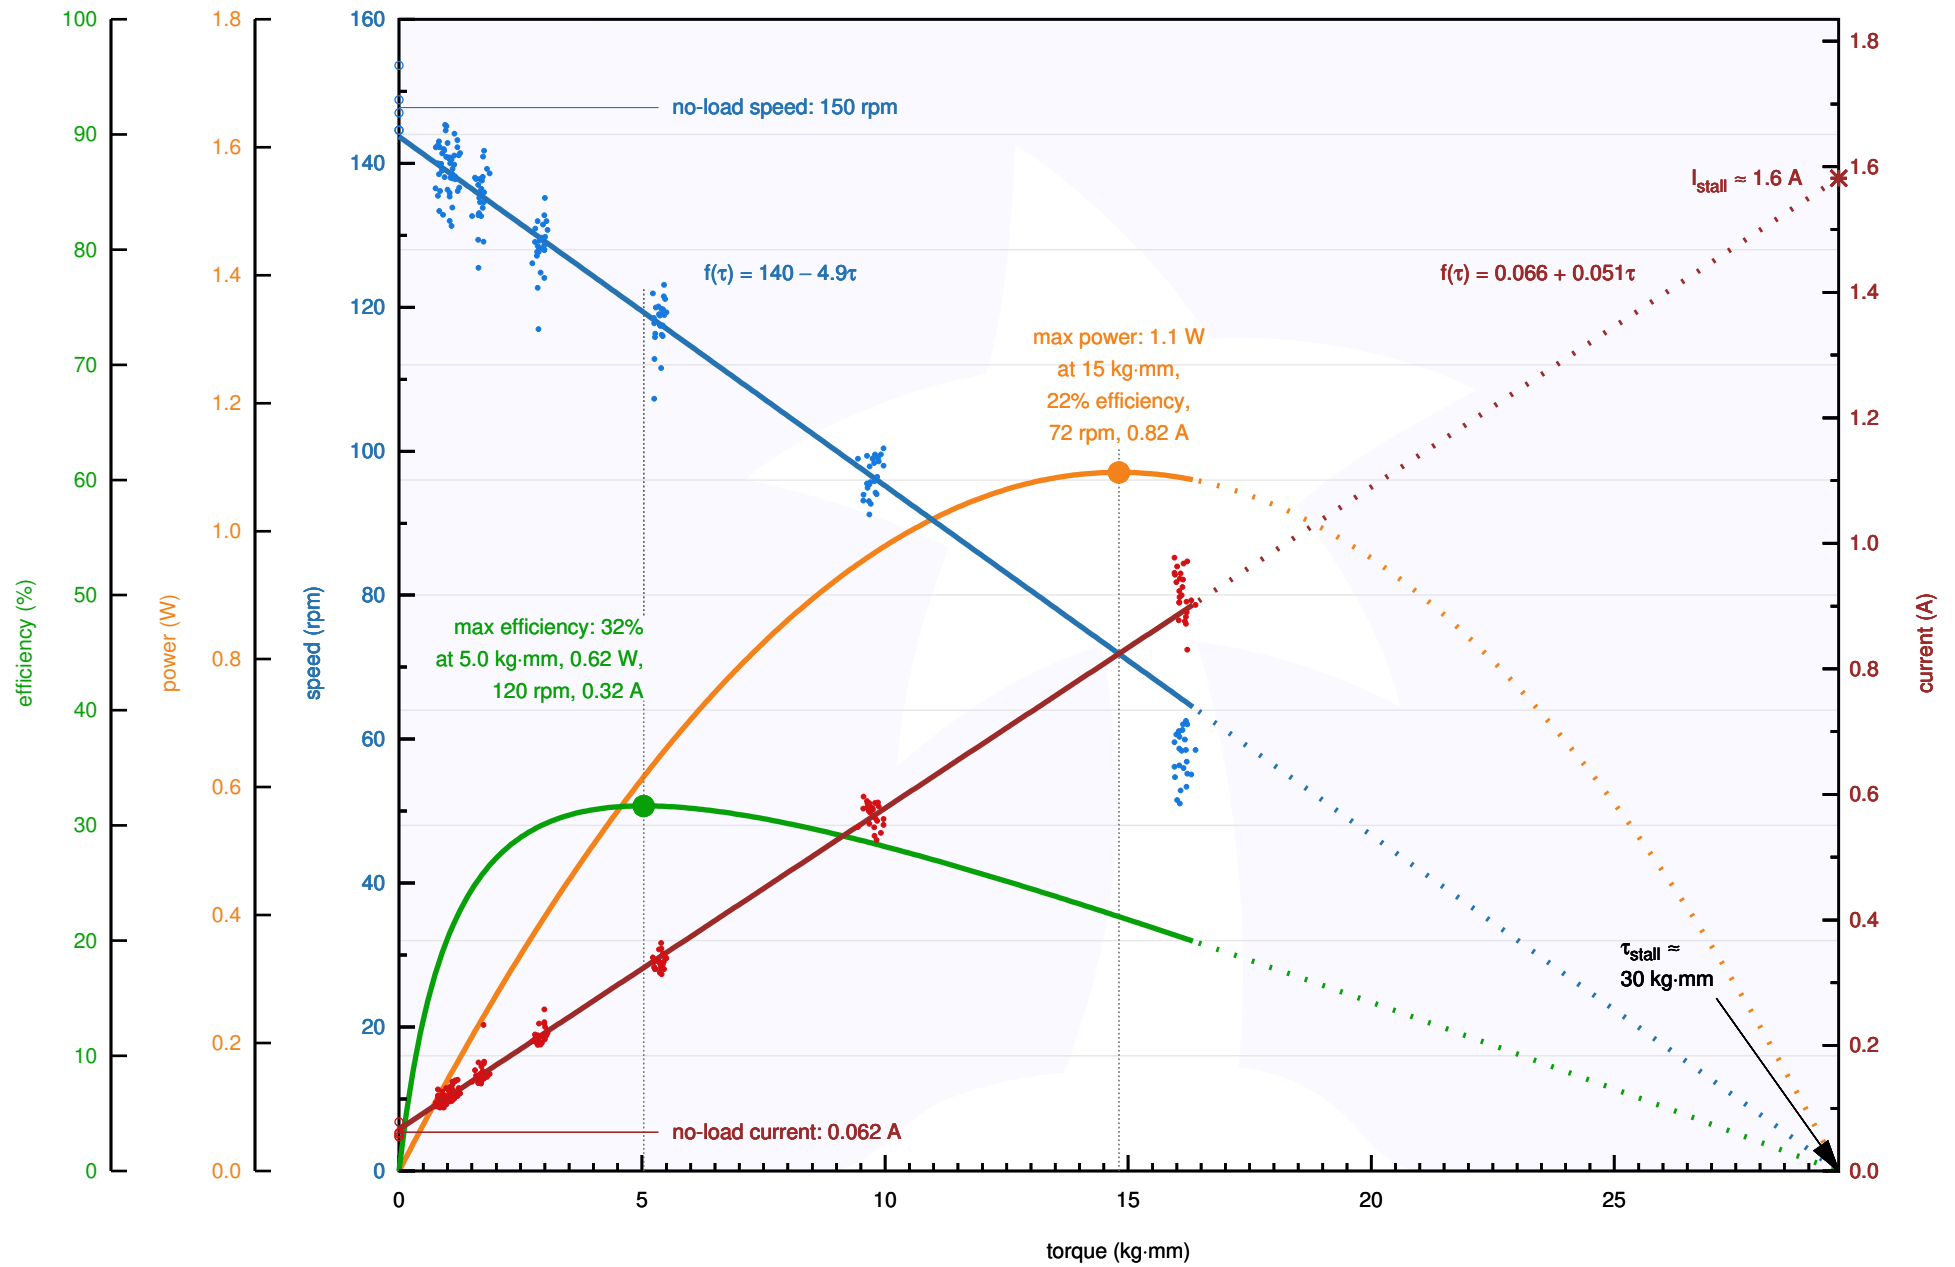


Pololu Items #995, #2217 (250:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

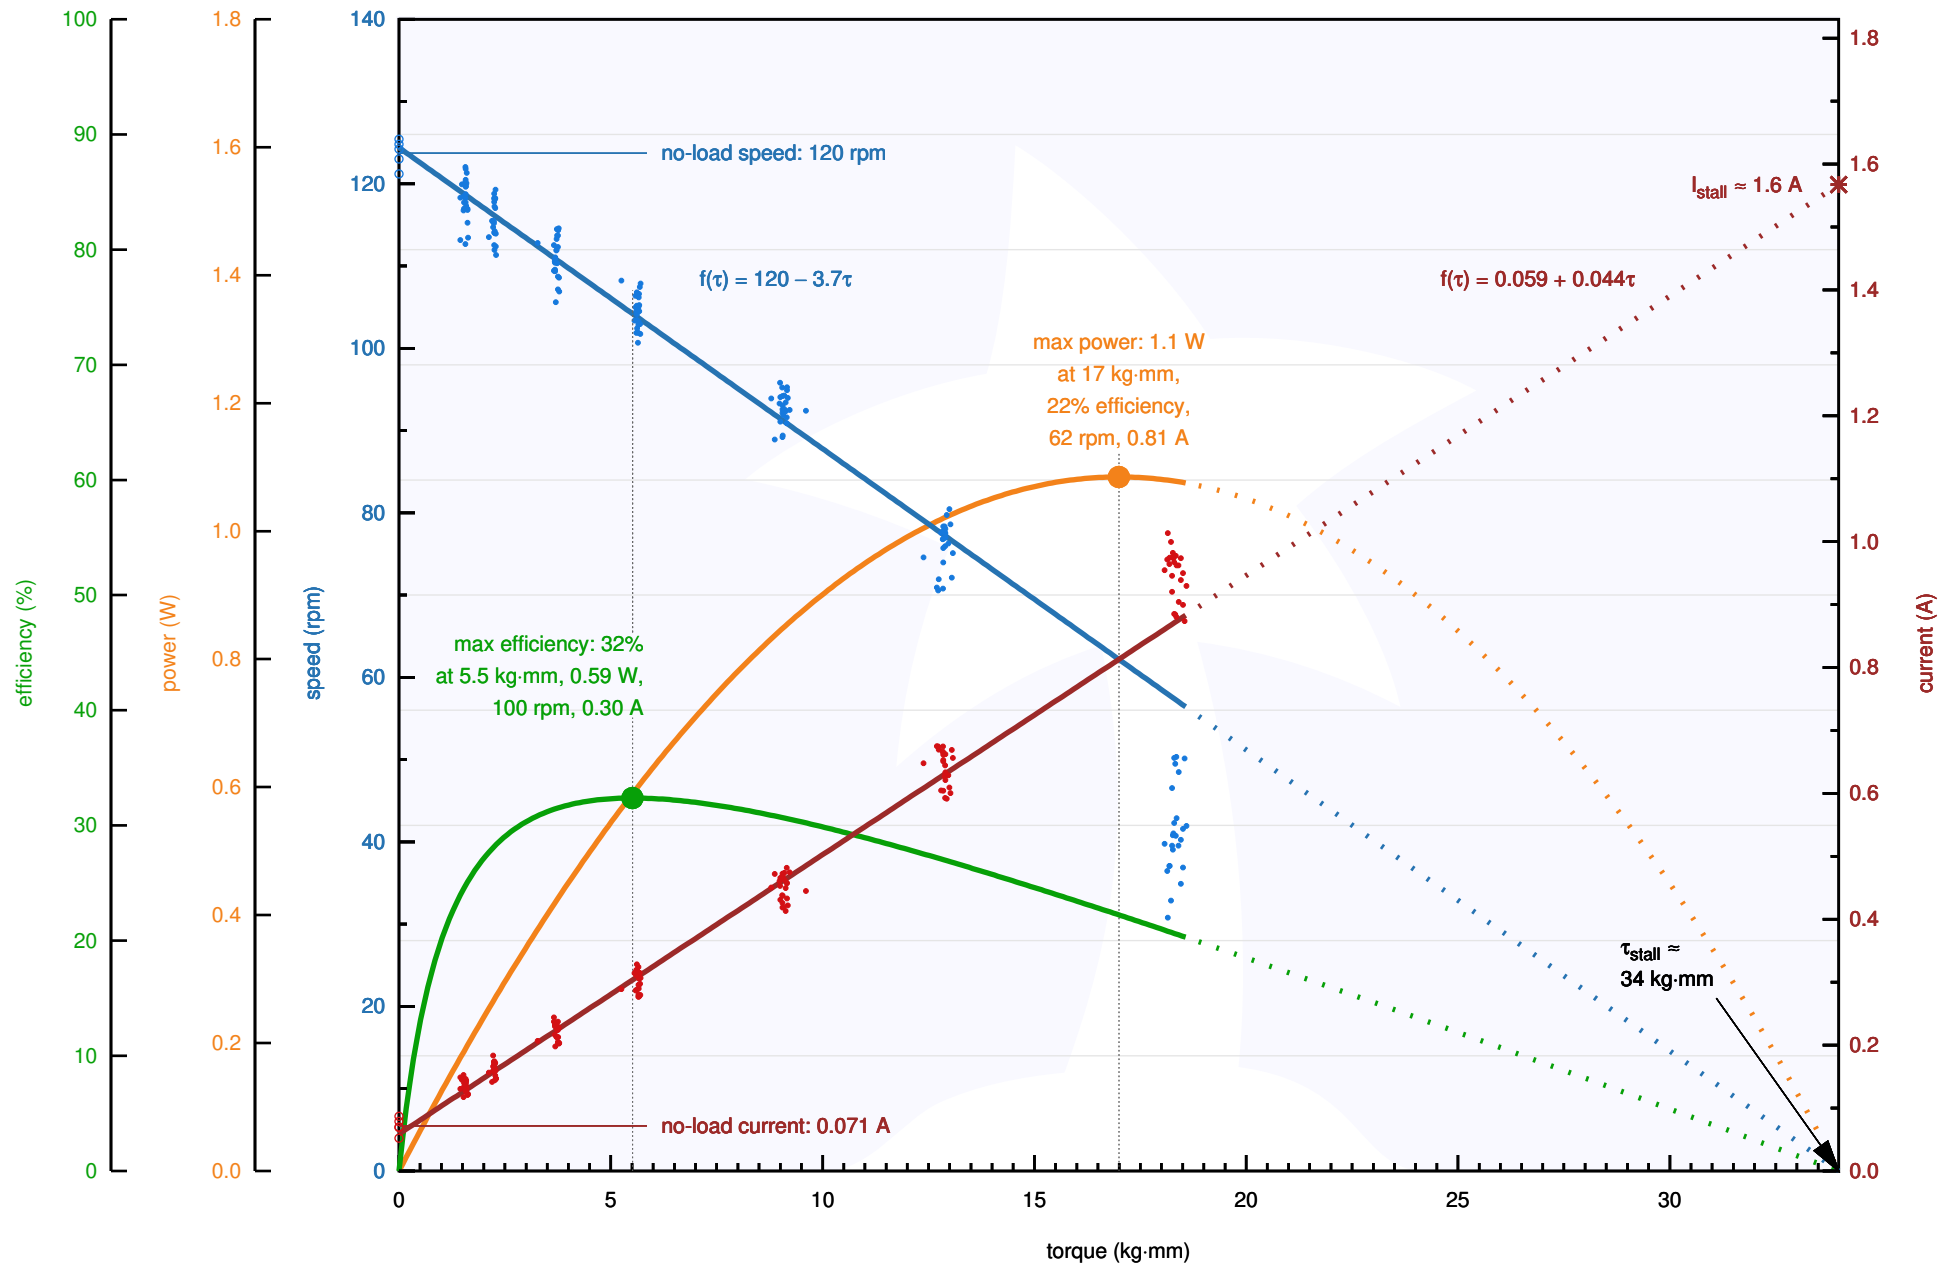


Pololu Items #994, #2218 (298:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

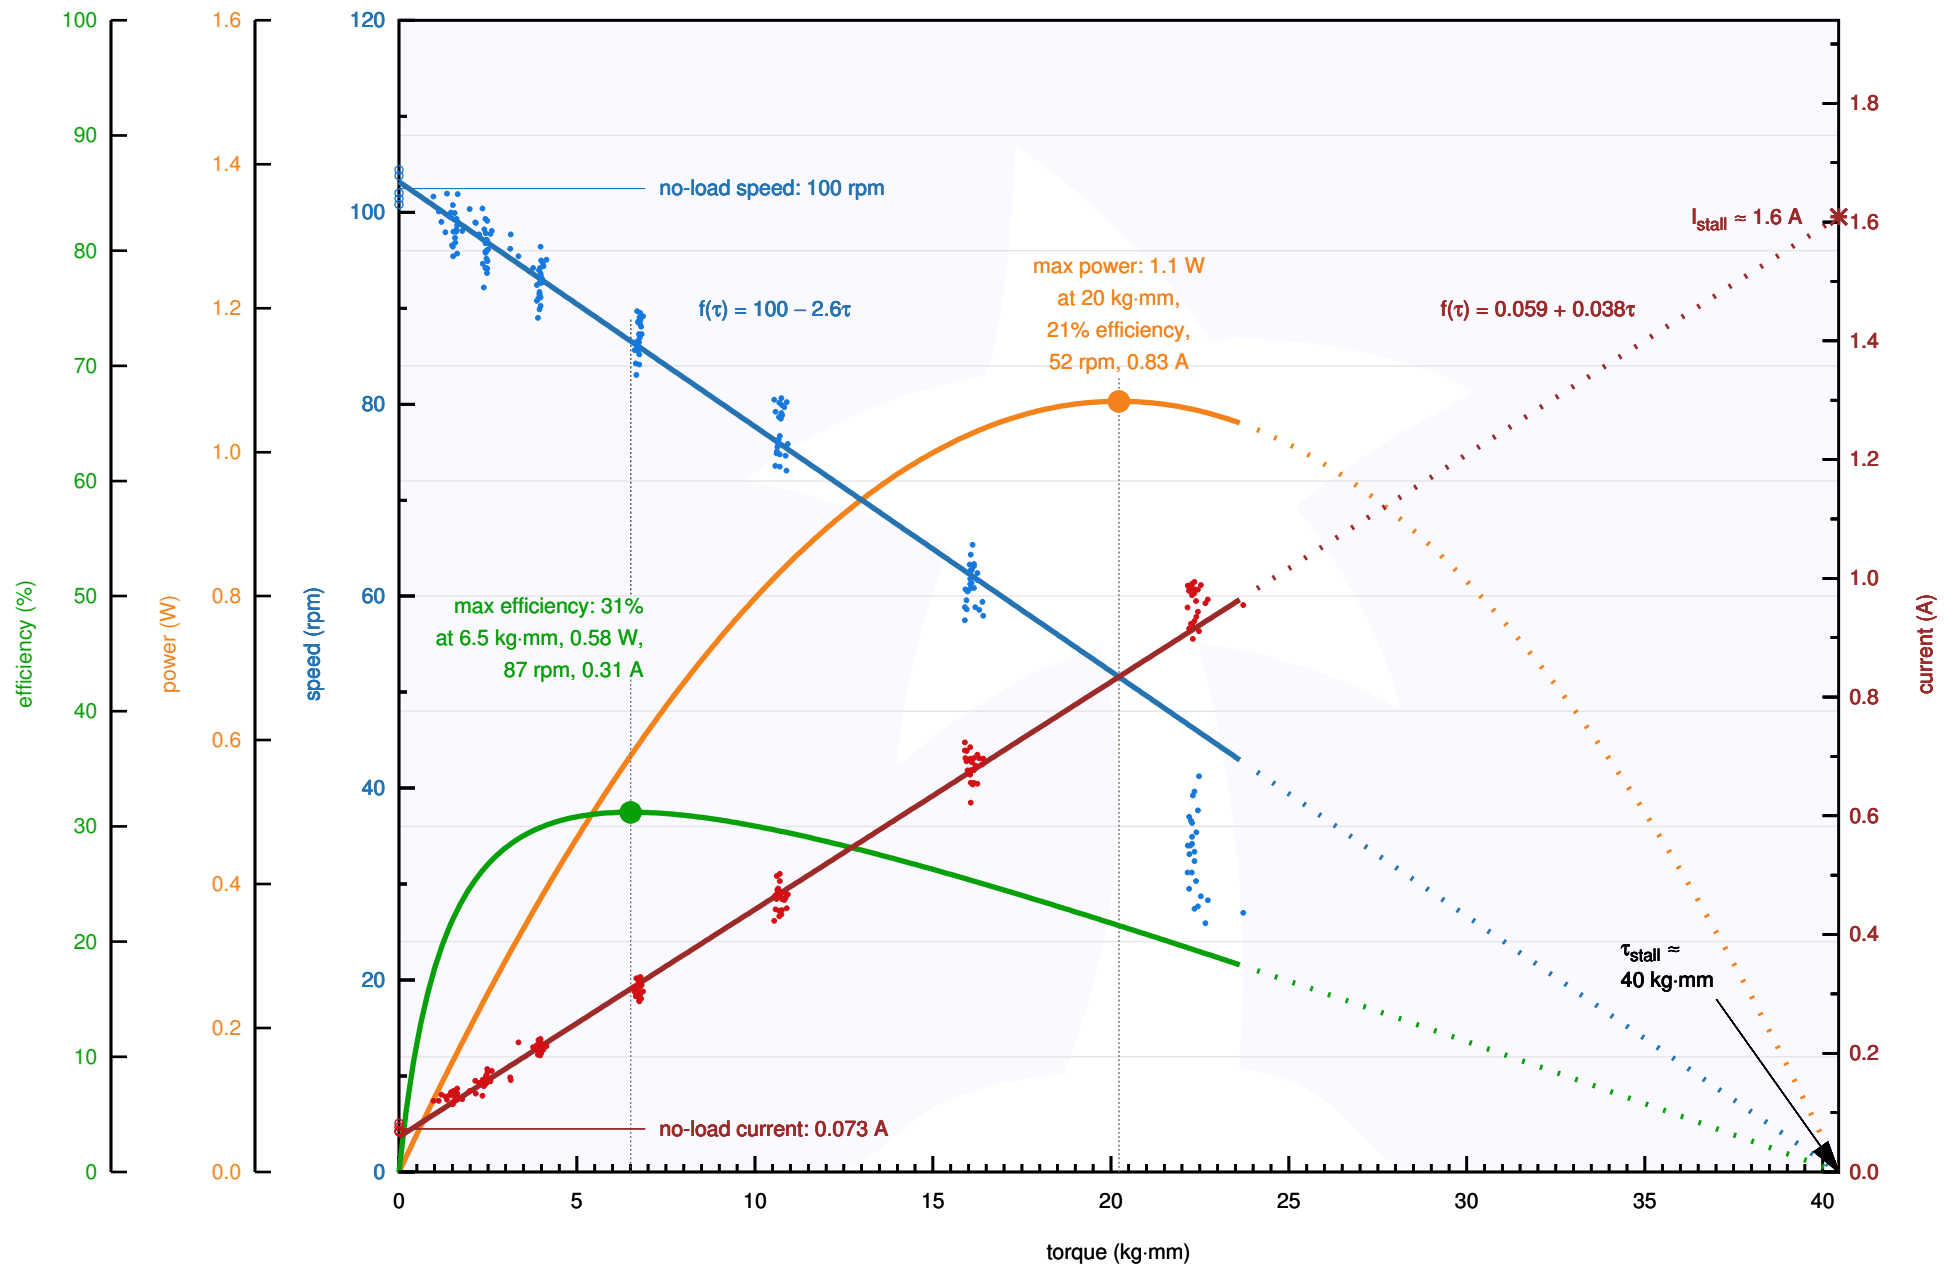


Pololu Items #1595, #2373 (1000:1 Micro Metal Gearmotor HP 6V) Performance at 6 V

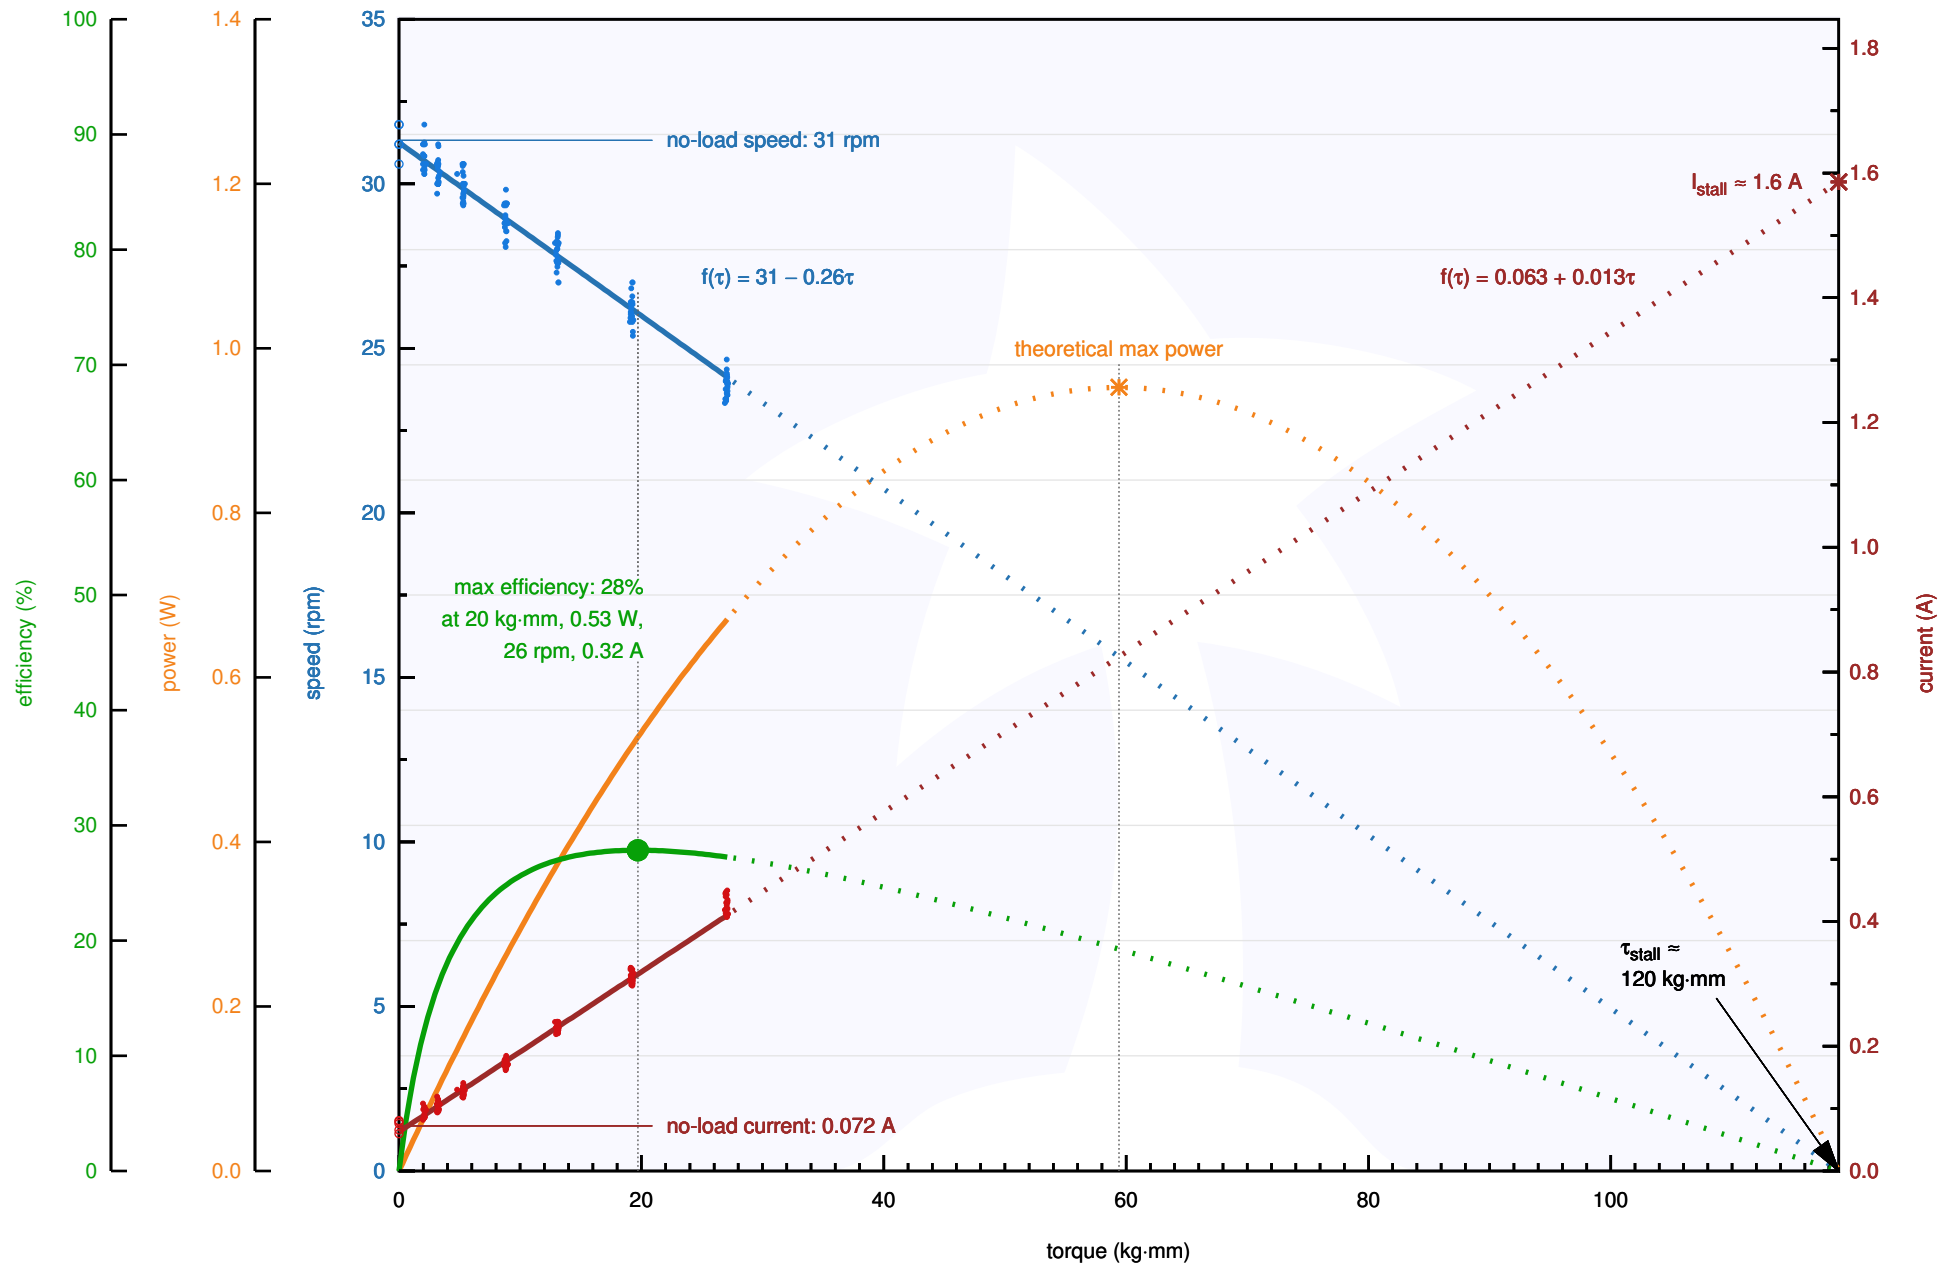


Pololu Items #3061, #3071 (10:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

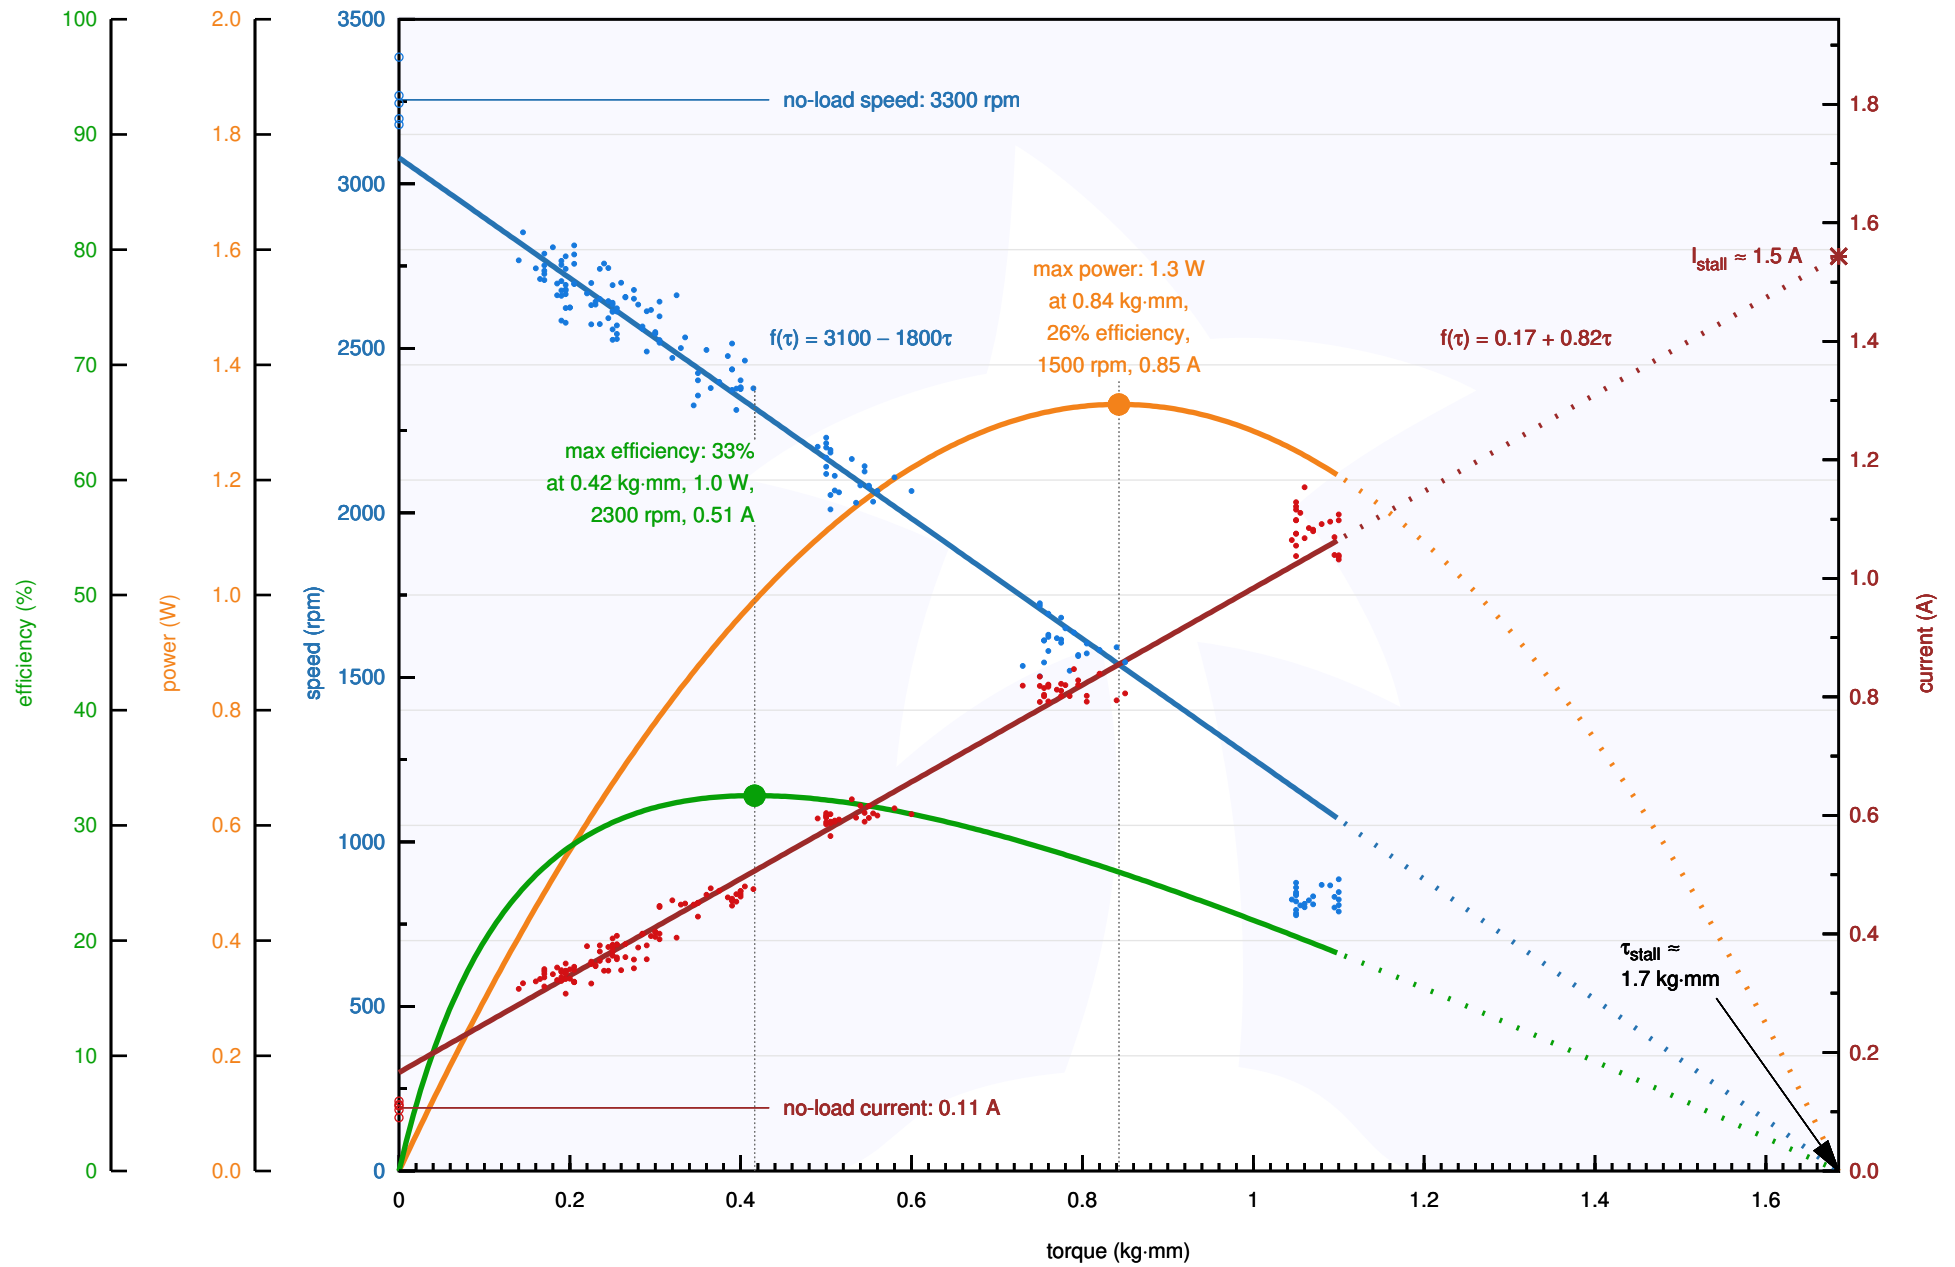


Pololu Items #3062, #3072 (30:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

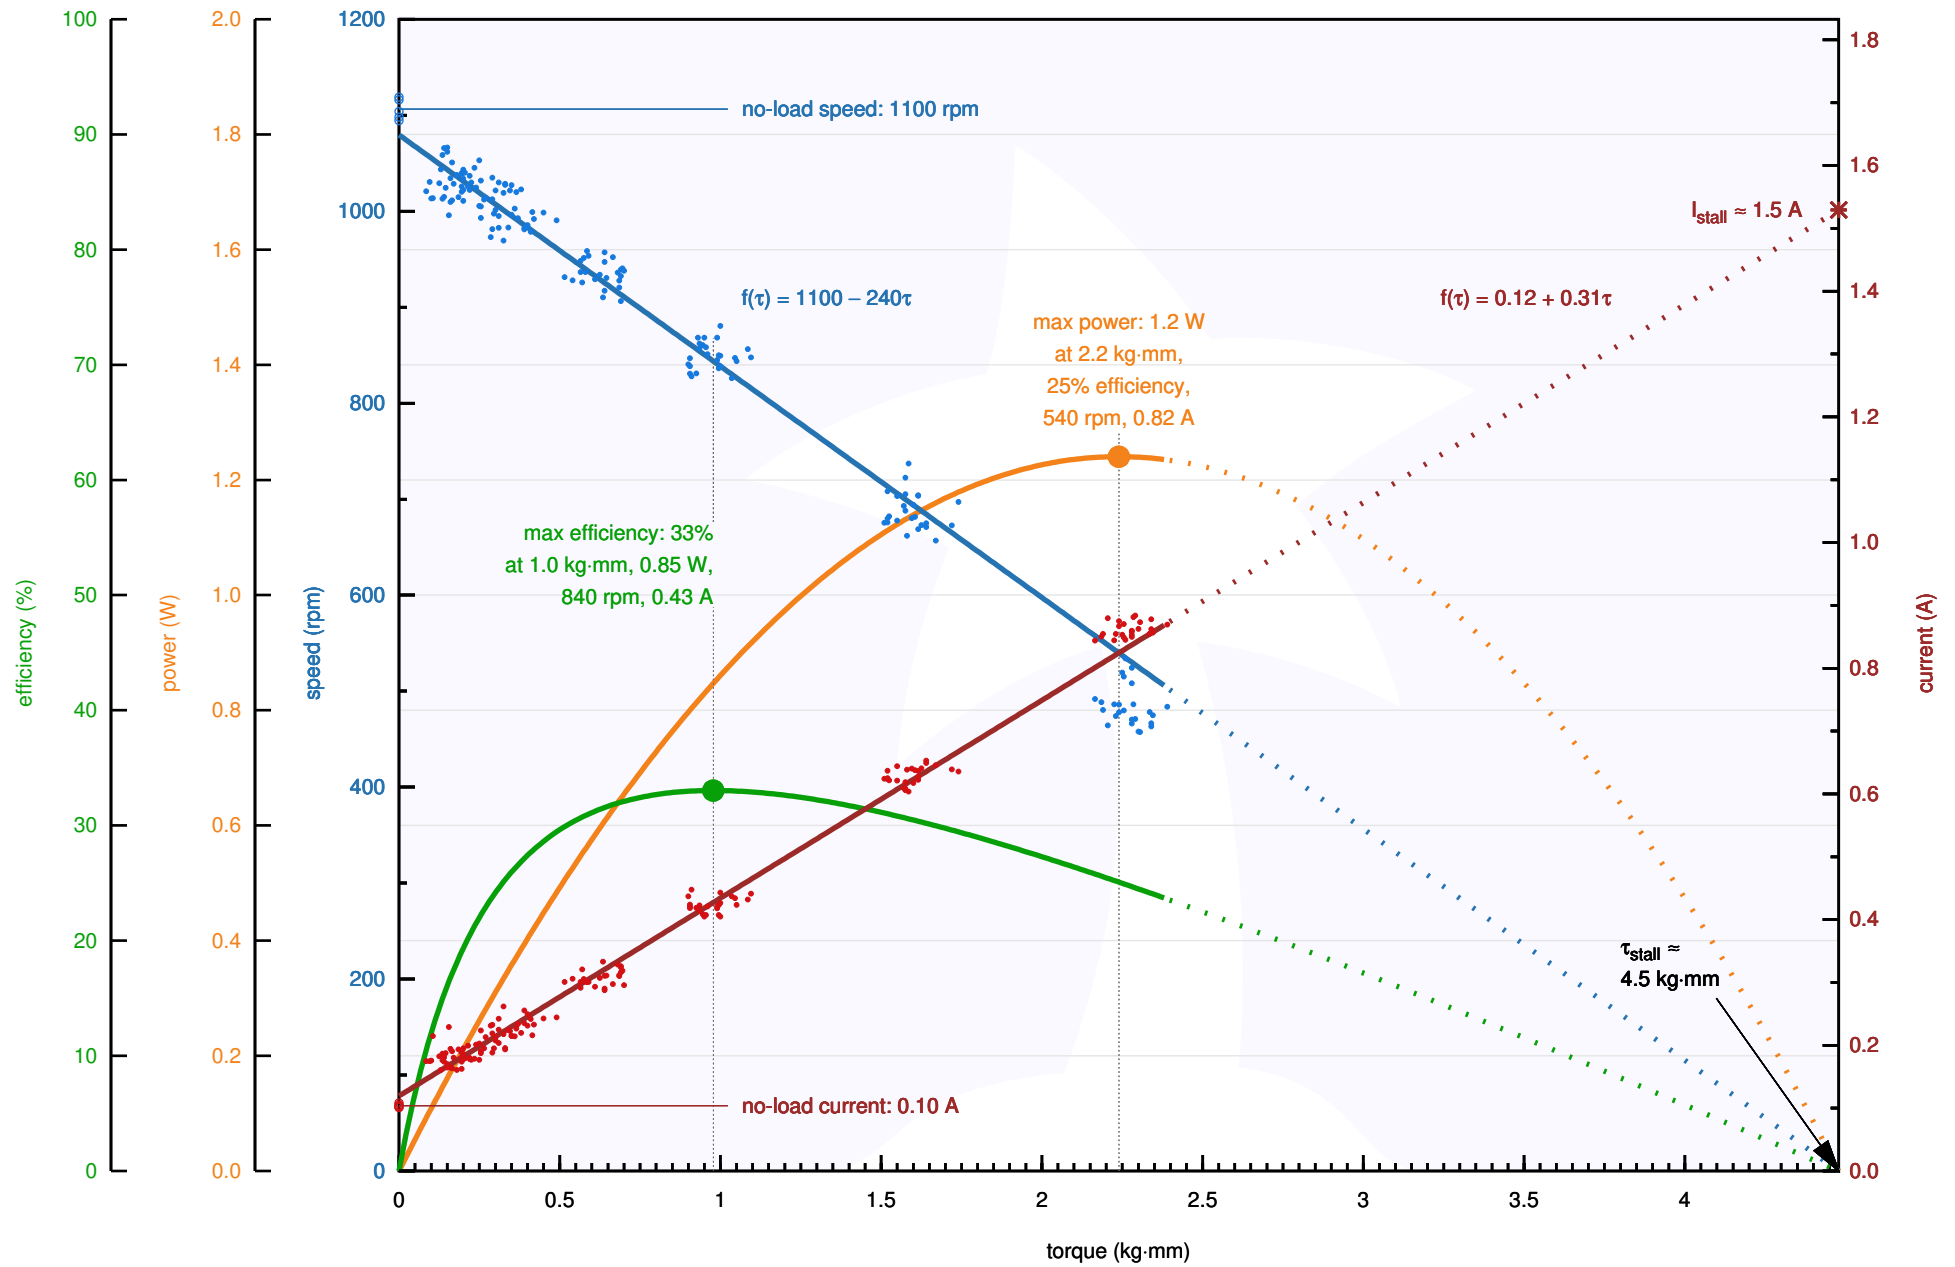


Pololu Items #3063, #3073 (50:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

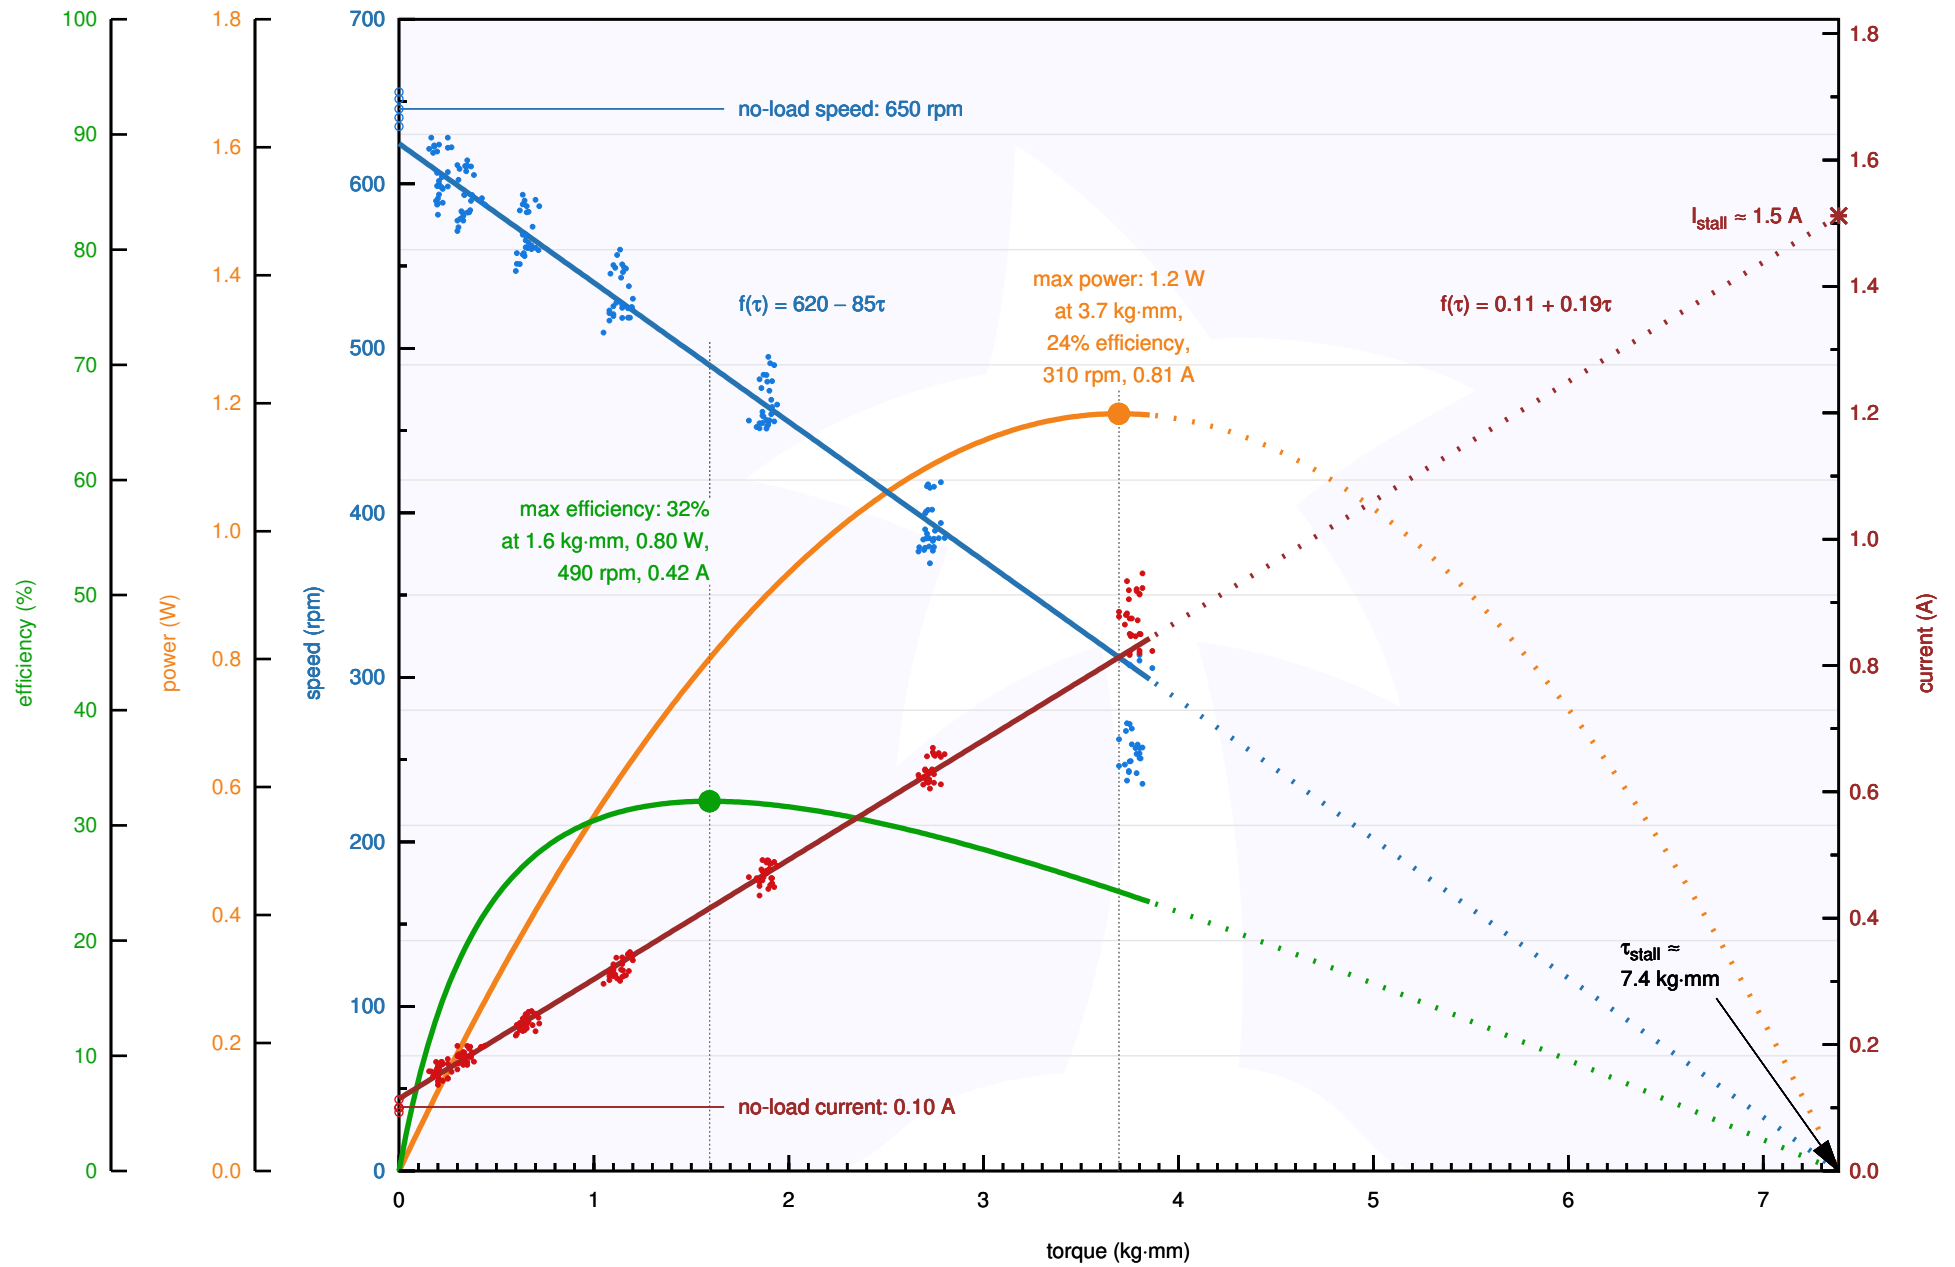


Pololu Items #3064, #3074 (75:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

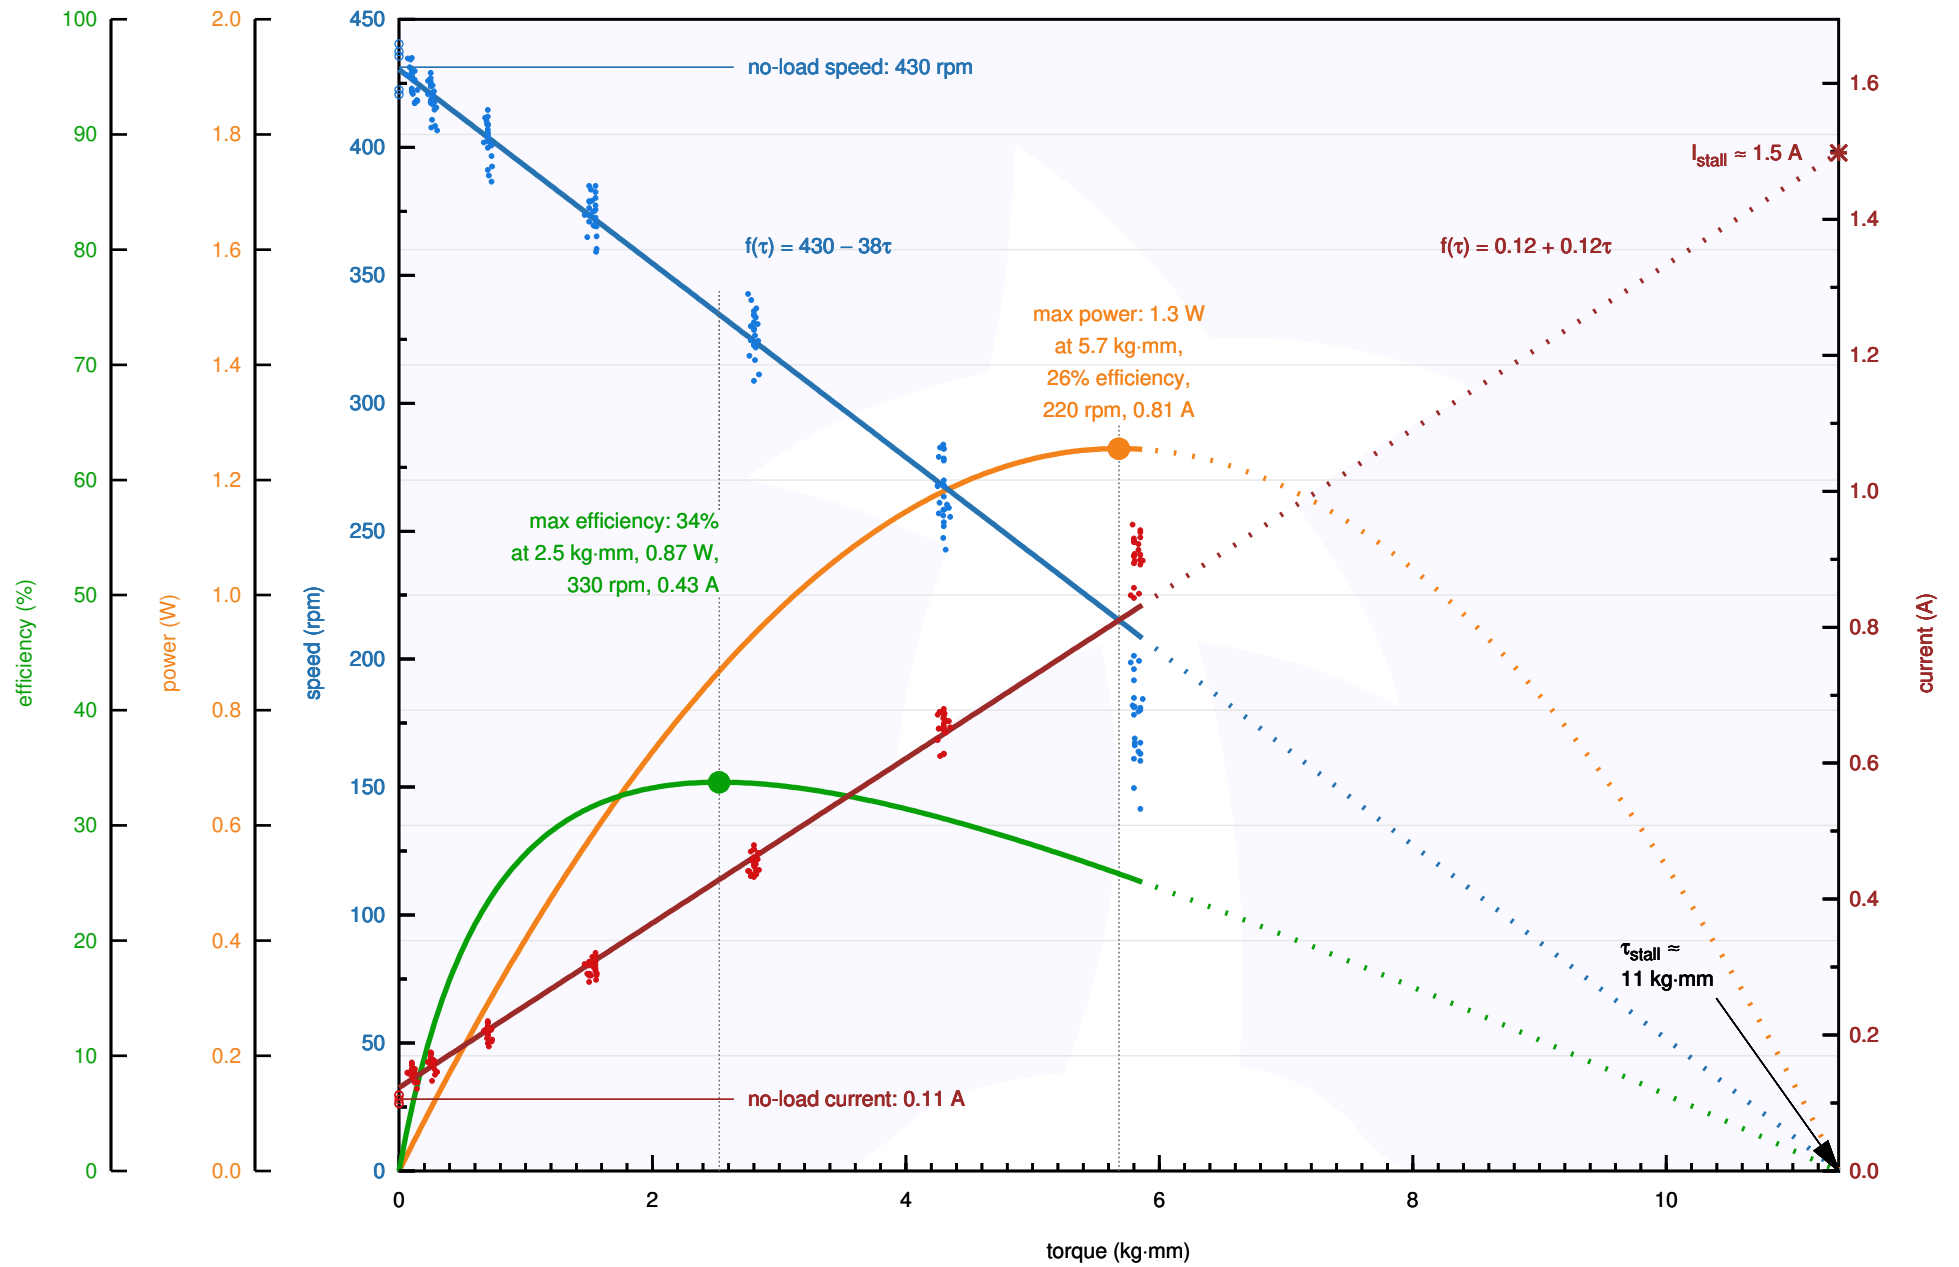


Pololu Items #3065, #3075 (100:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

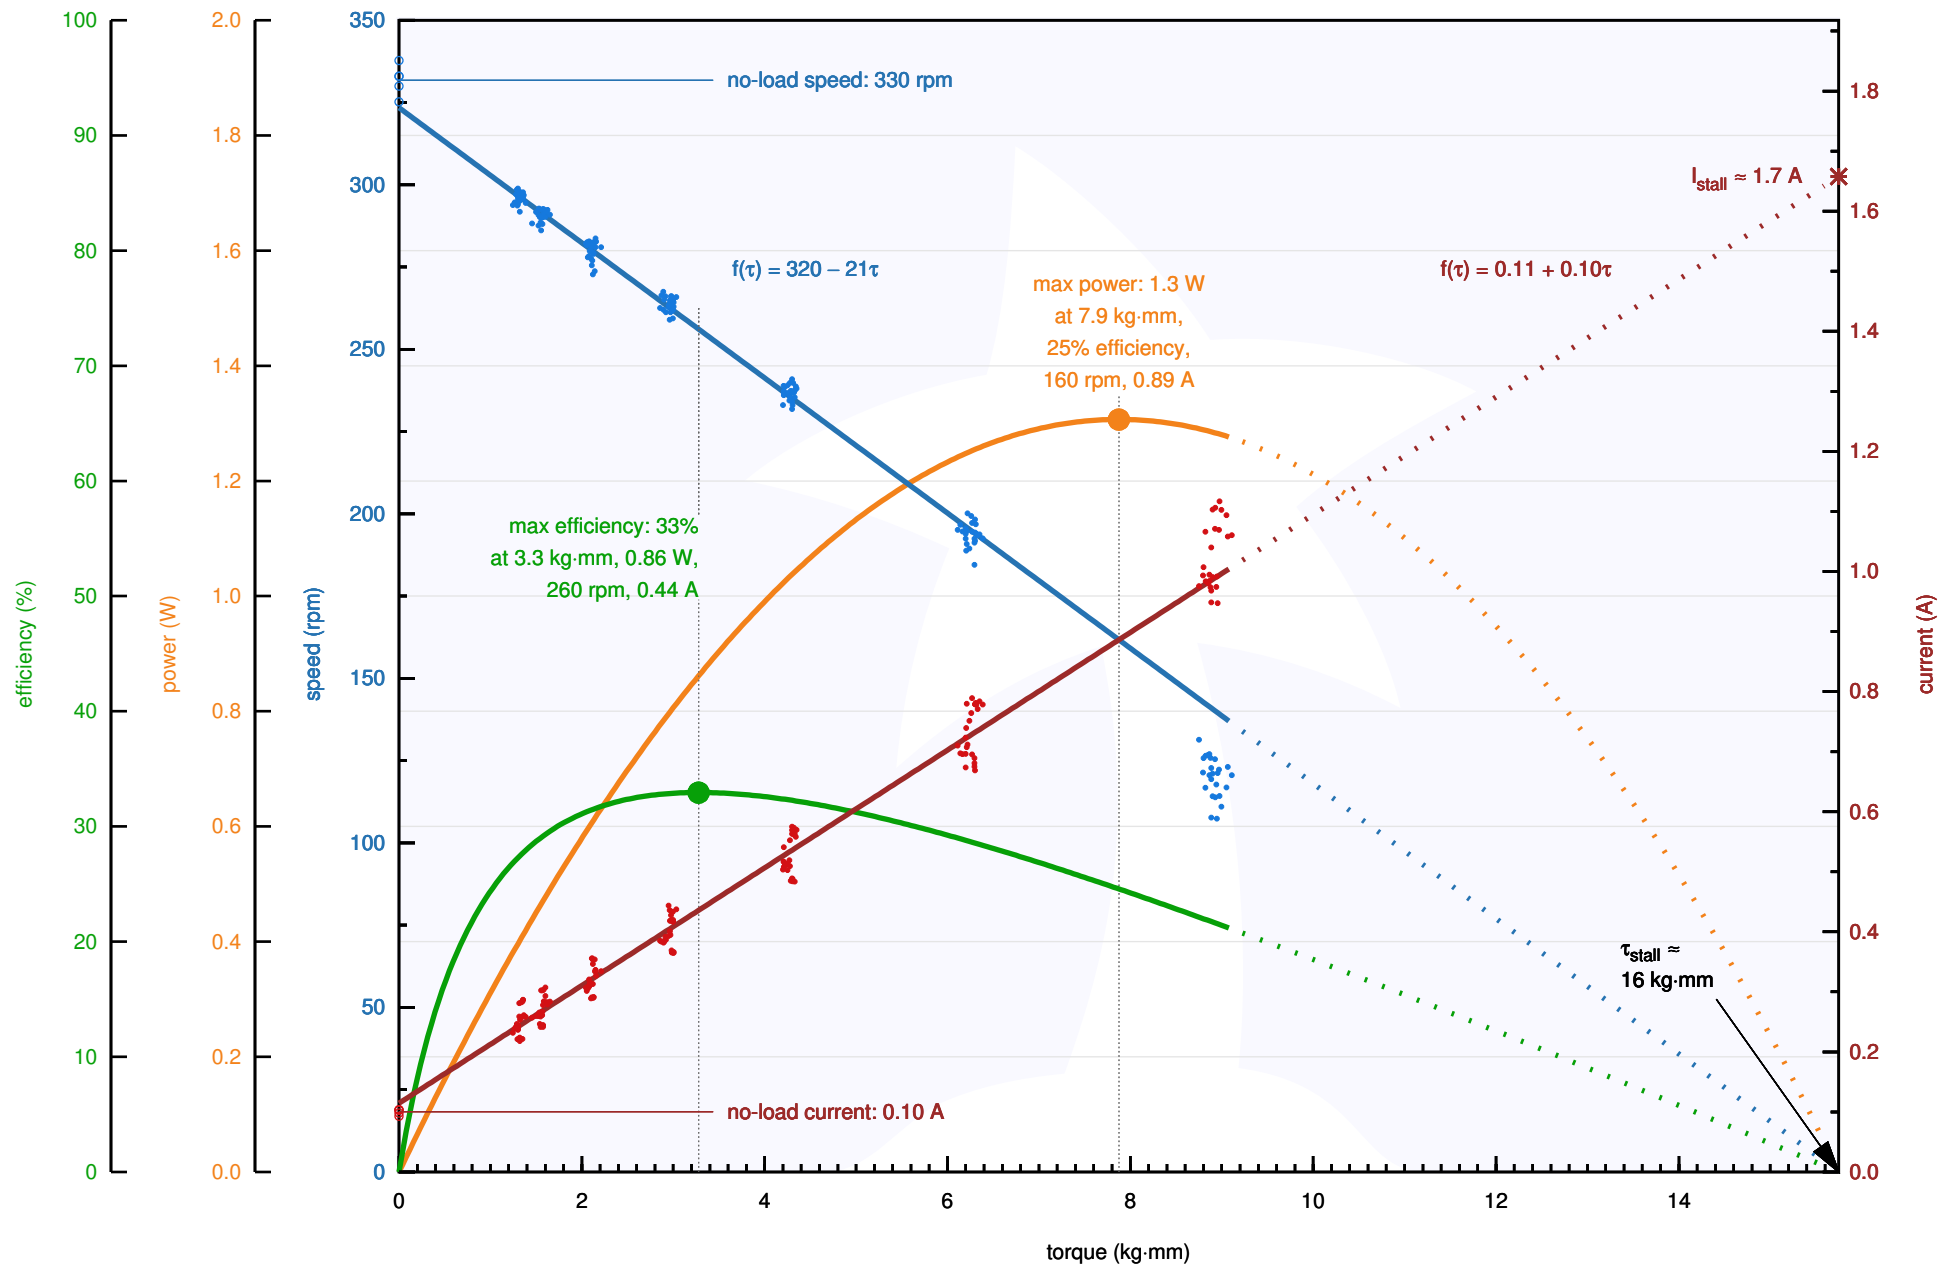


Pololu Items #3066, #3076 (150:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

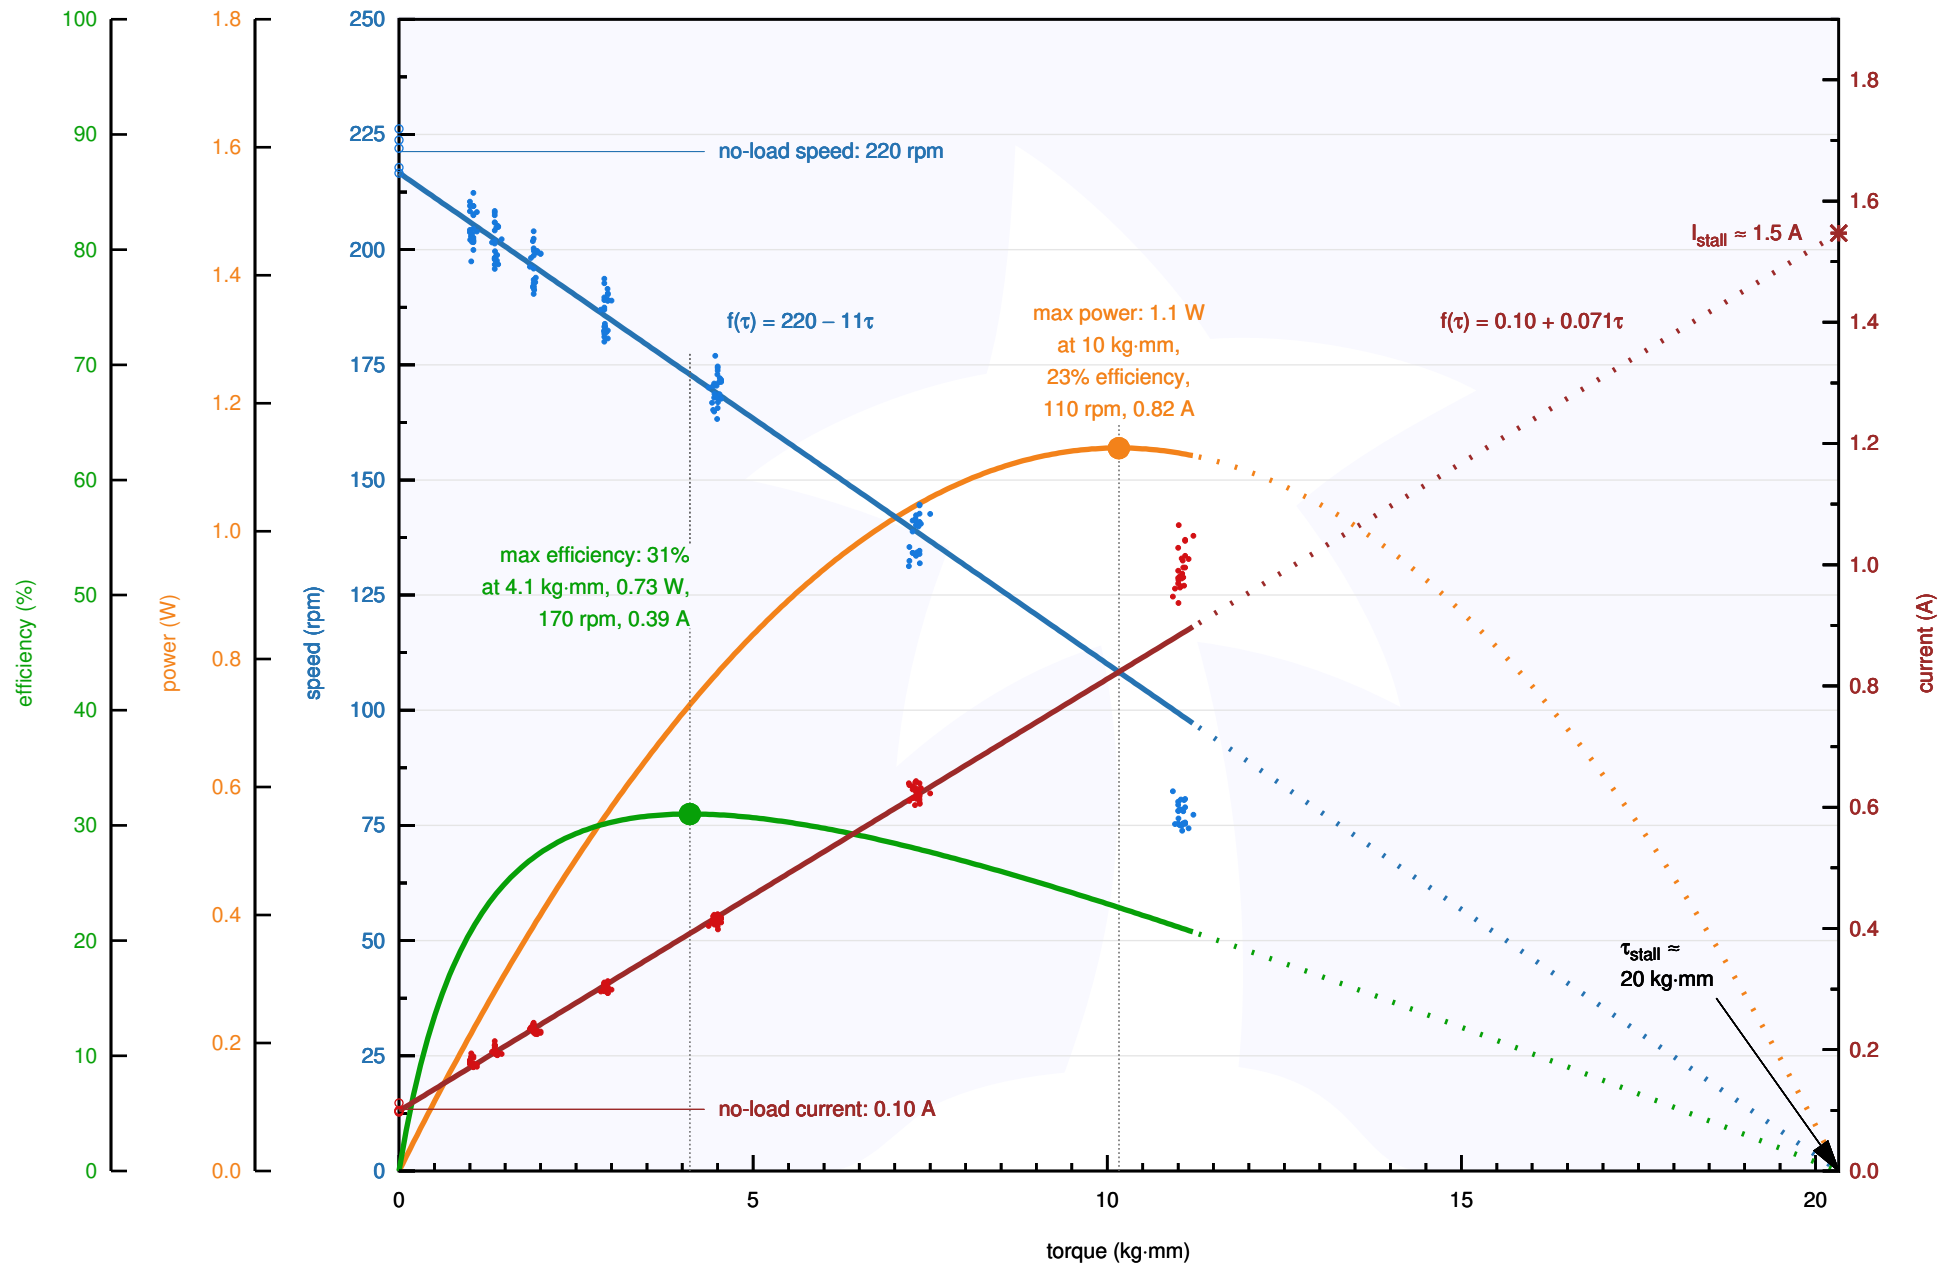


Pololu Items #3067, #3077 (210:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

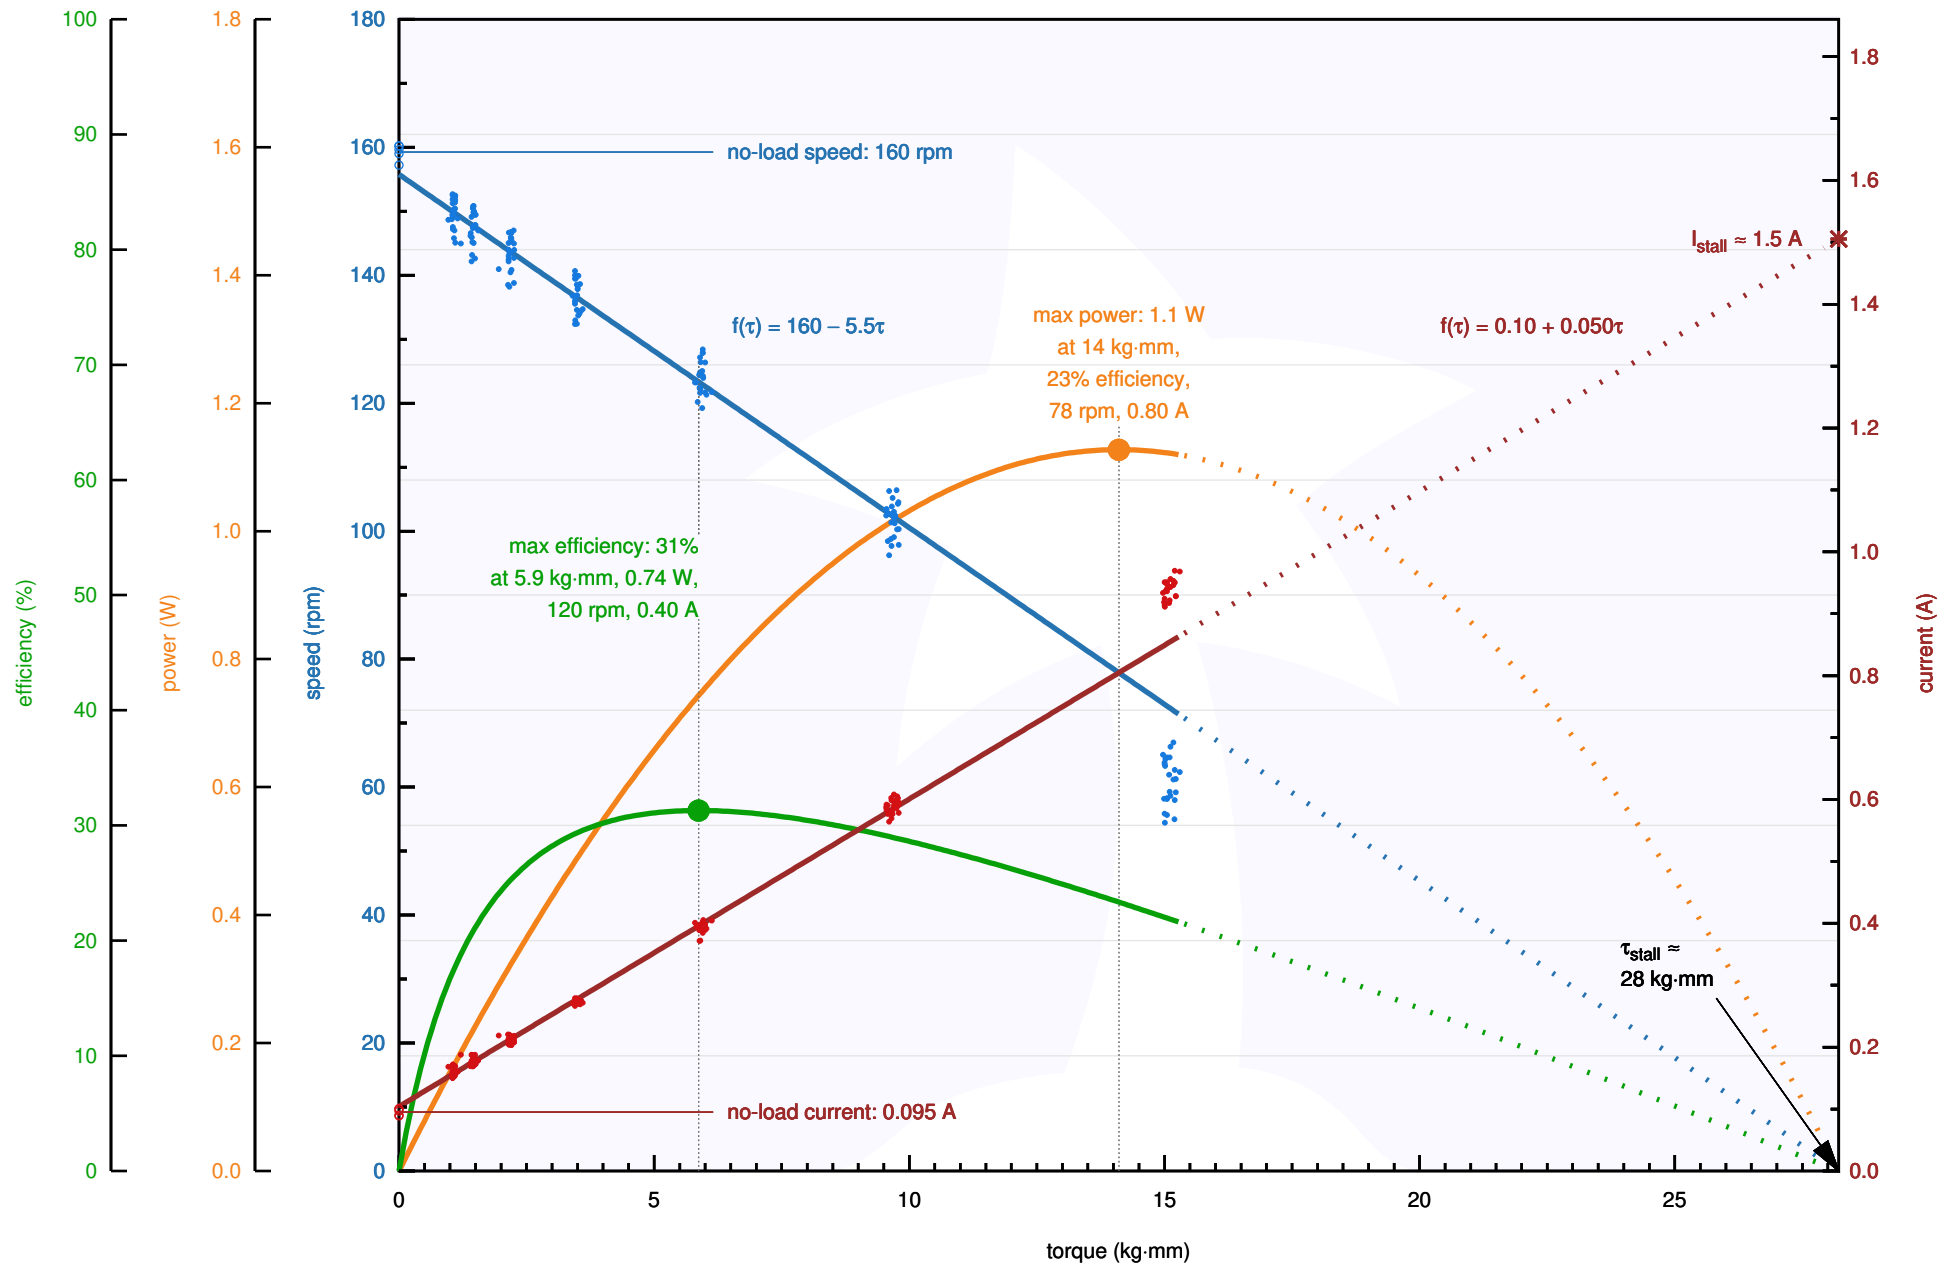


Pololu Items #3068, #3078 (250:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

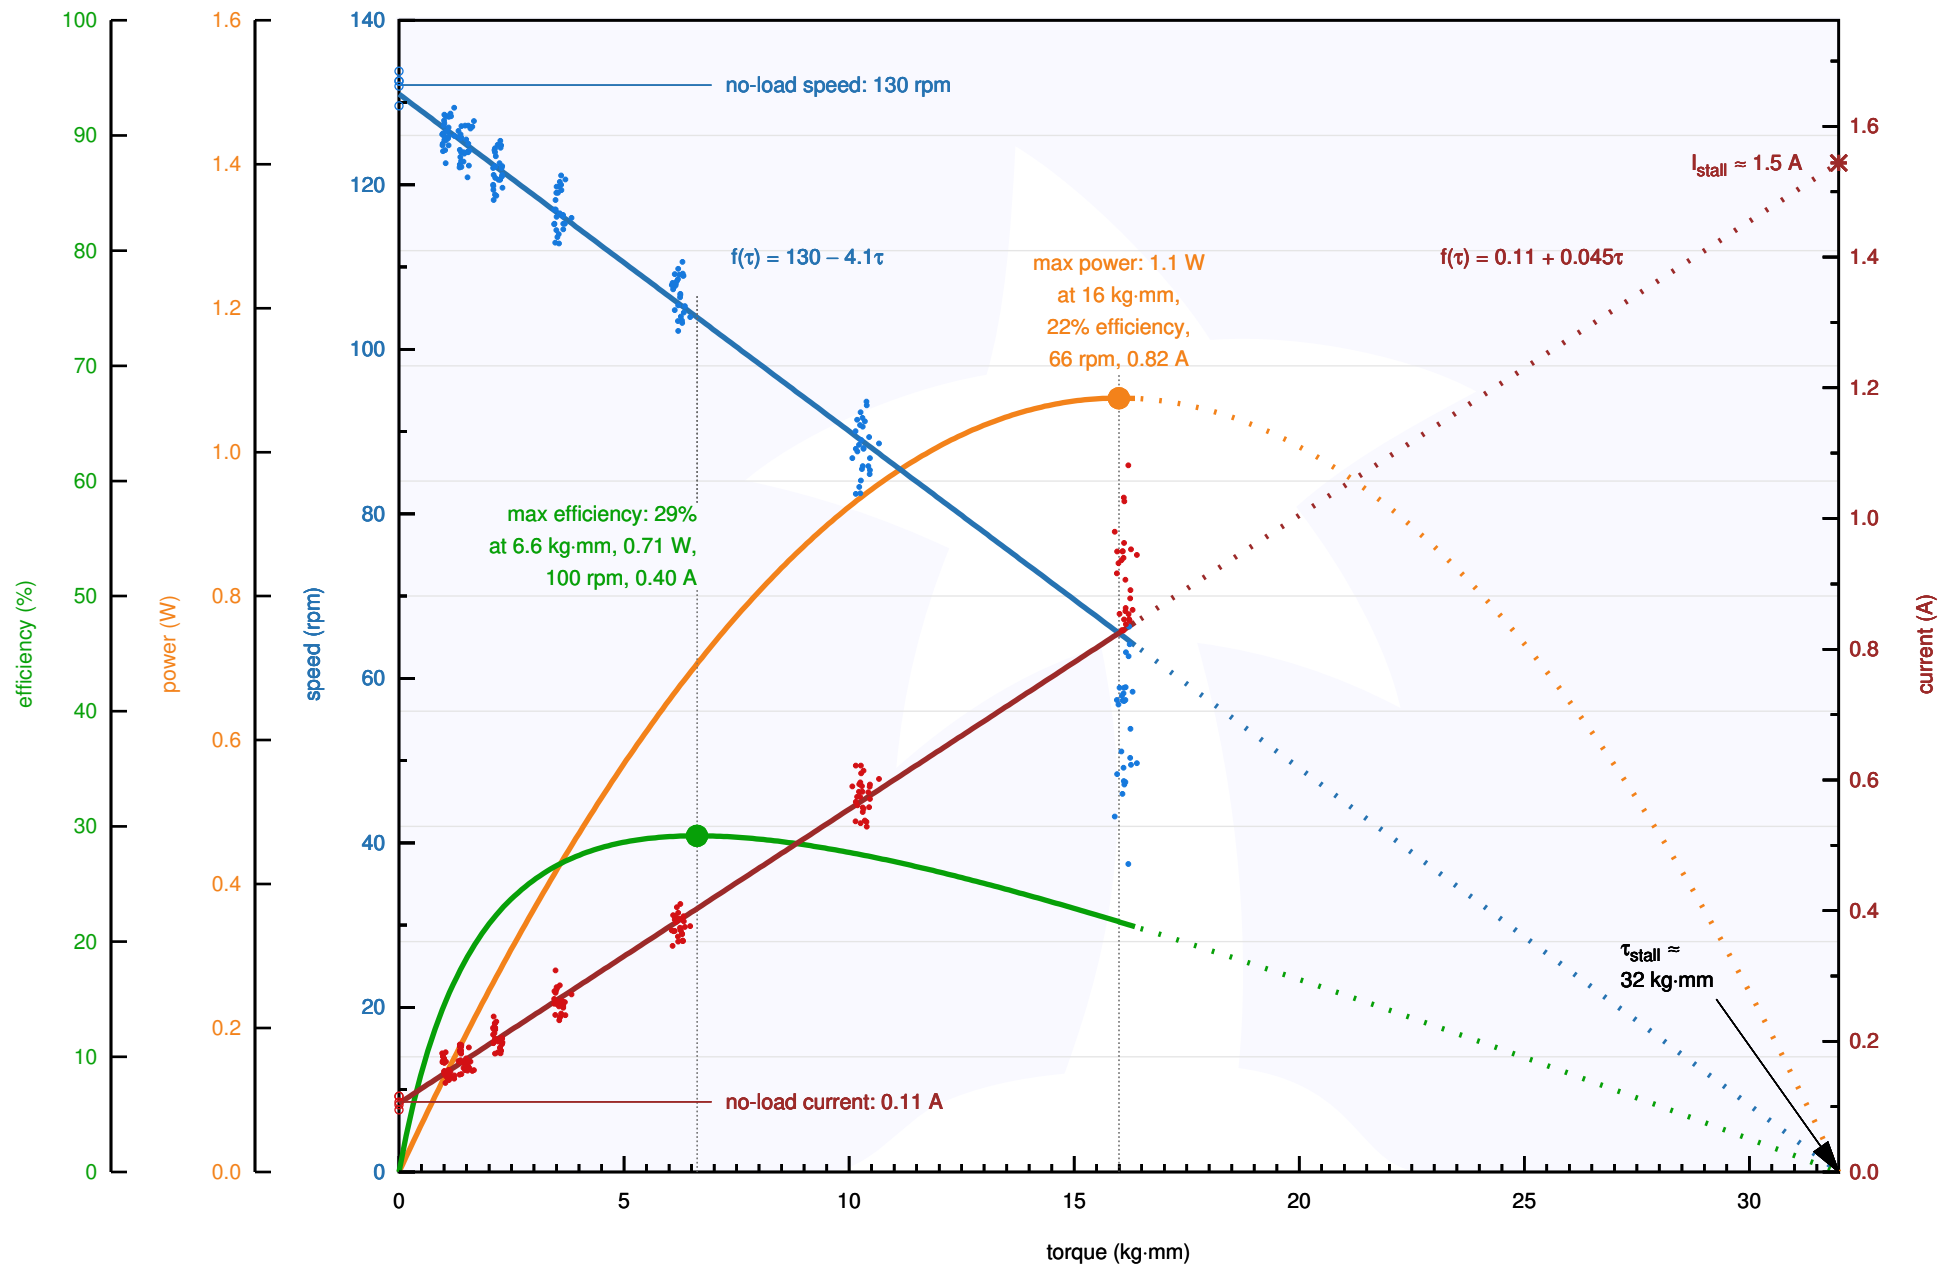


Pololu Items #3069, #3079 (298:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

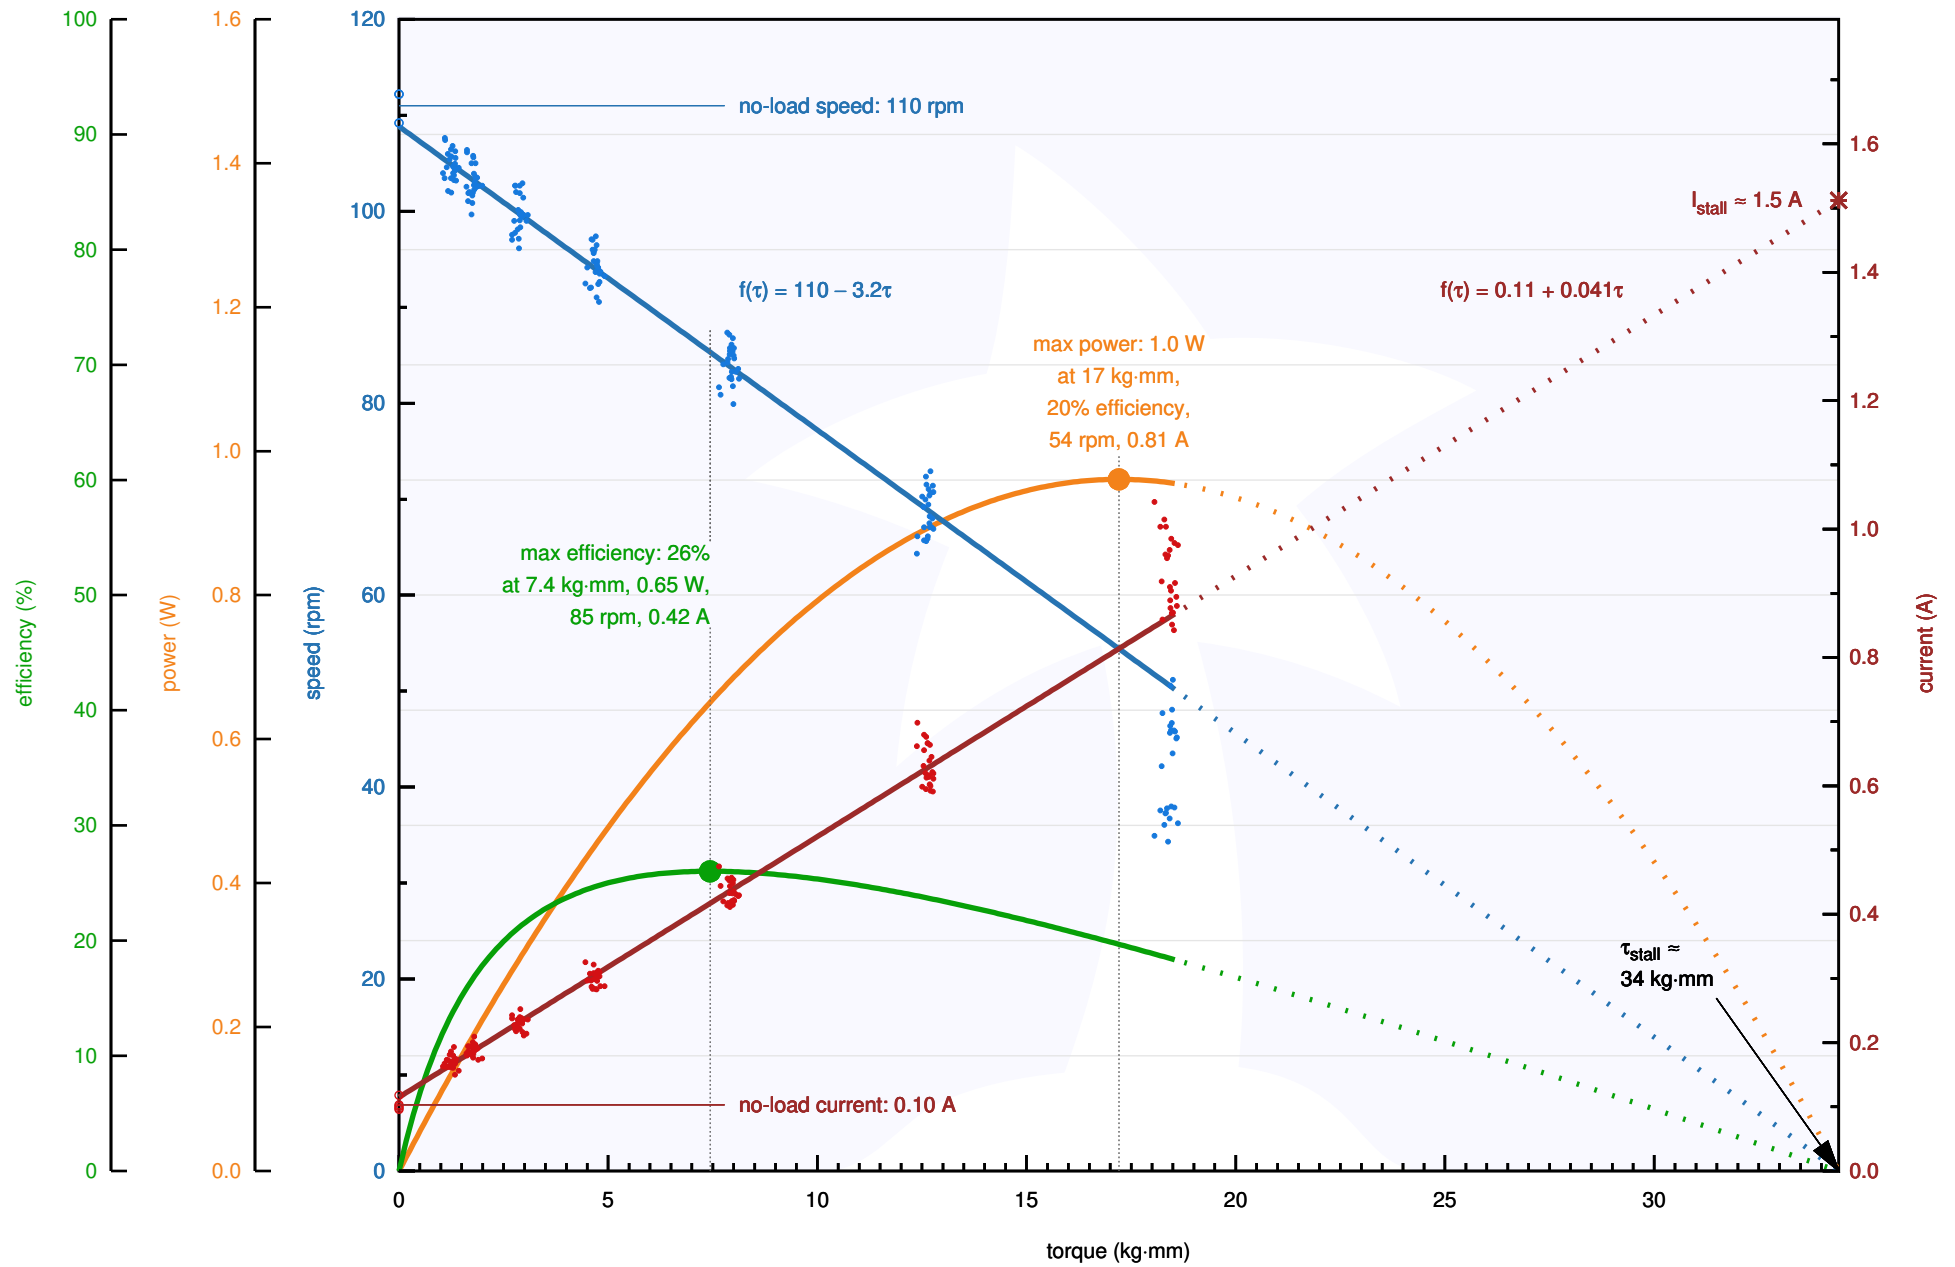


Pololu Items #3070, #3080 (1000:1 Micro Metal Gearmotor HPCB 6V) Performance at 6 V

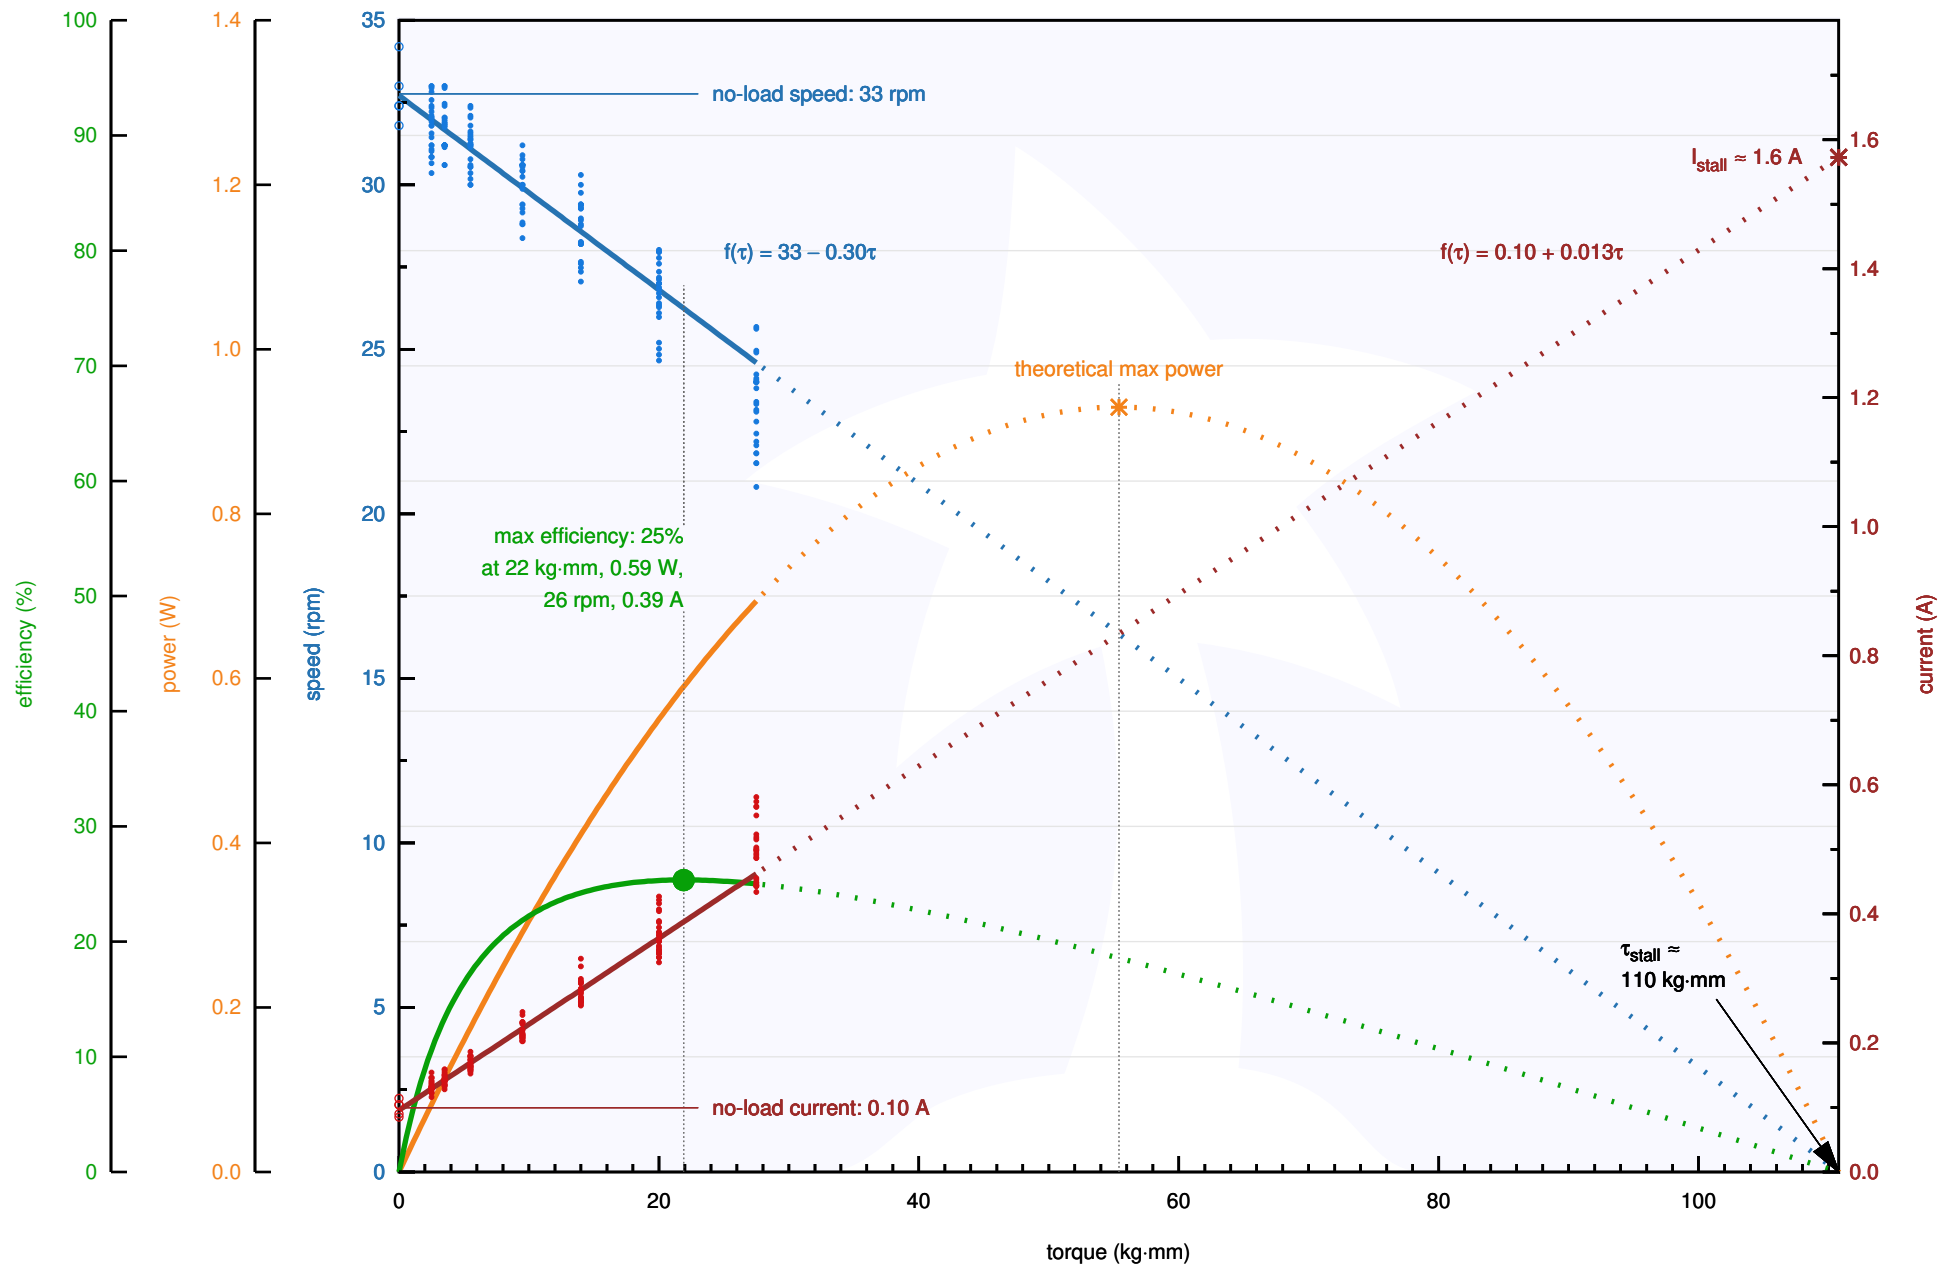


Pololu Items #3037, #3048 (10:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

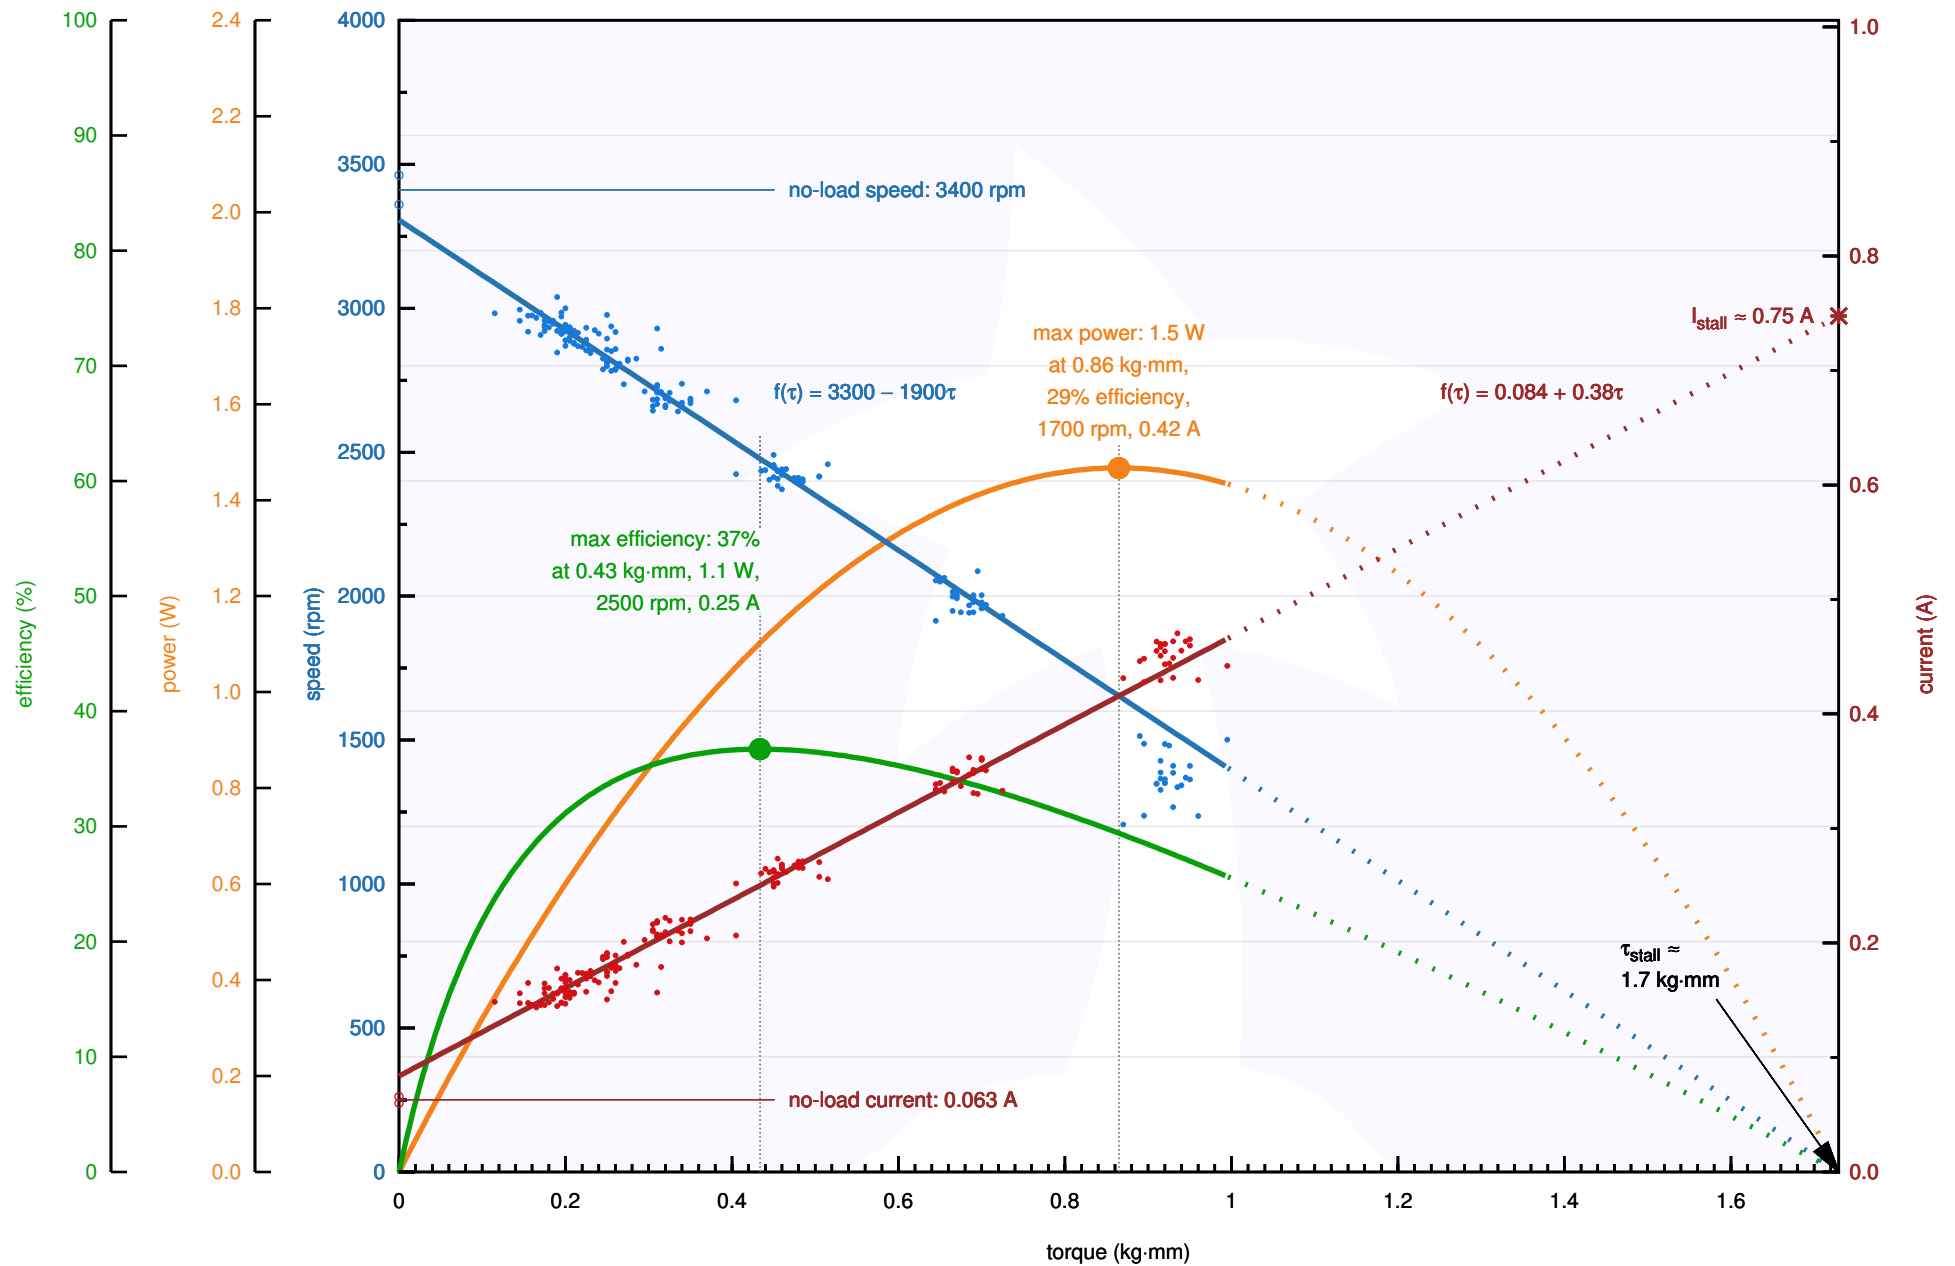


Pololu Items #3038, #3049 (30:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

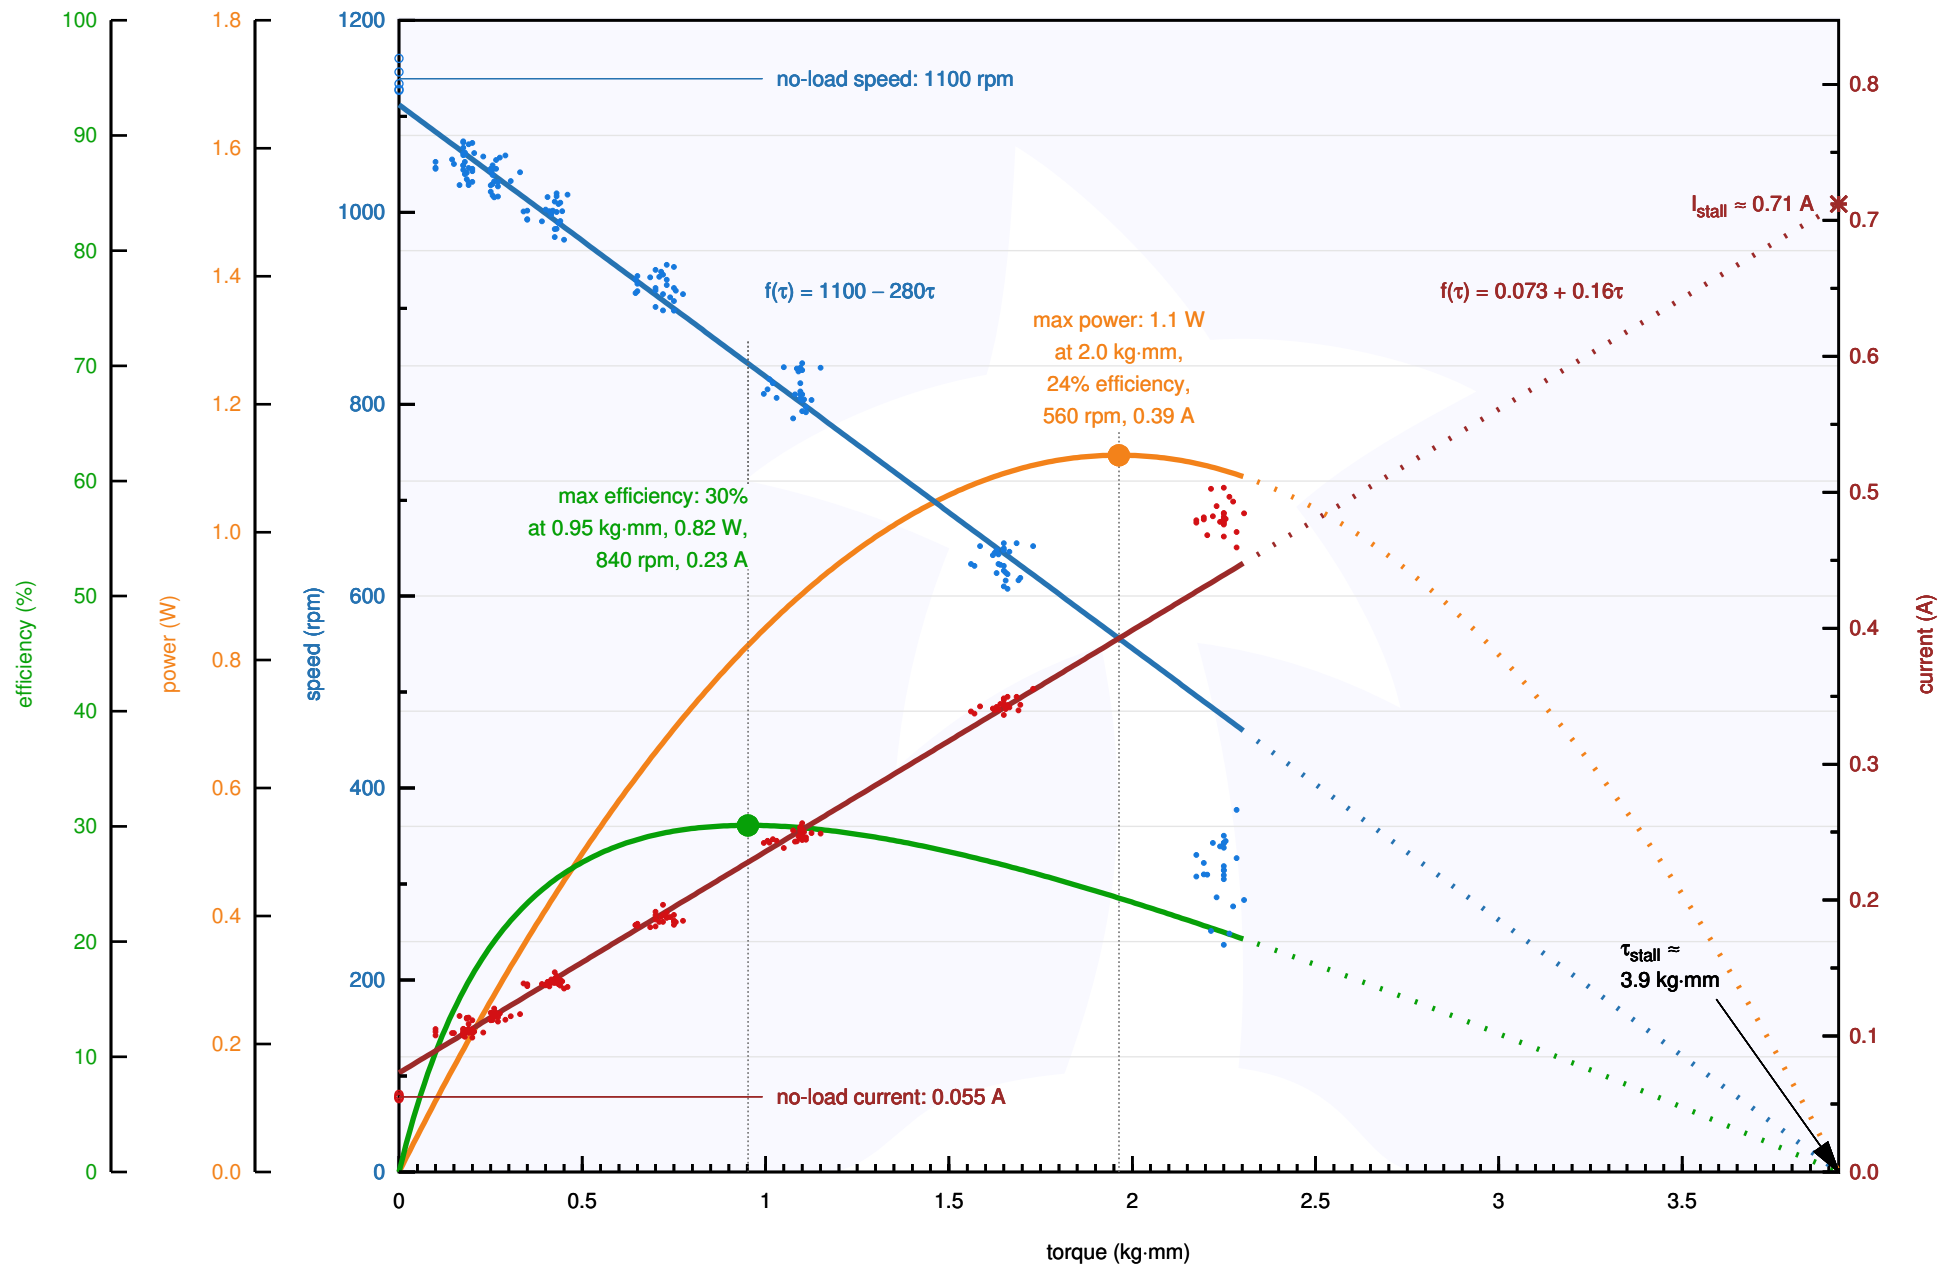


Pololu Items #3039, #3050 (50:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

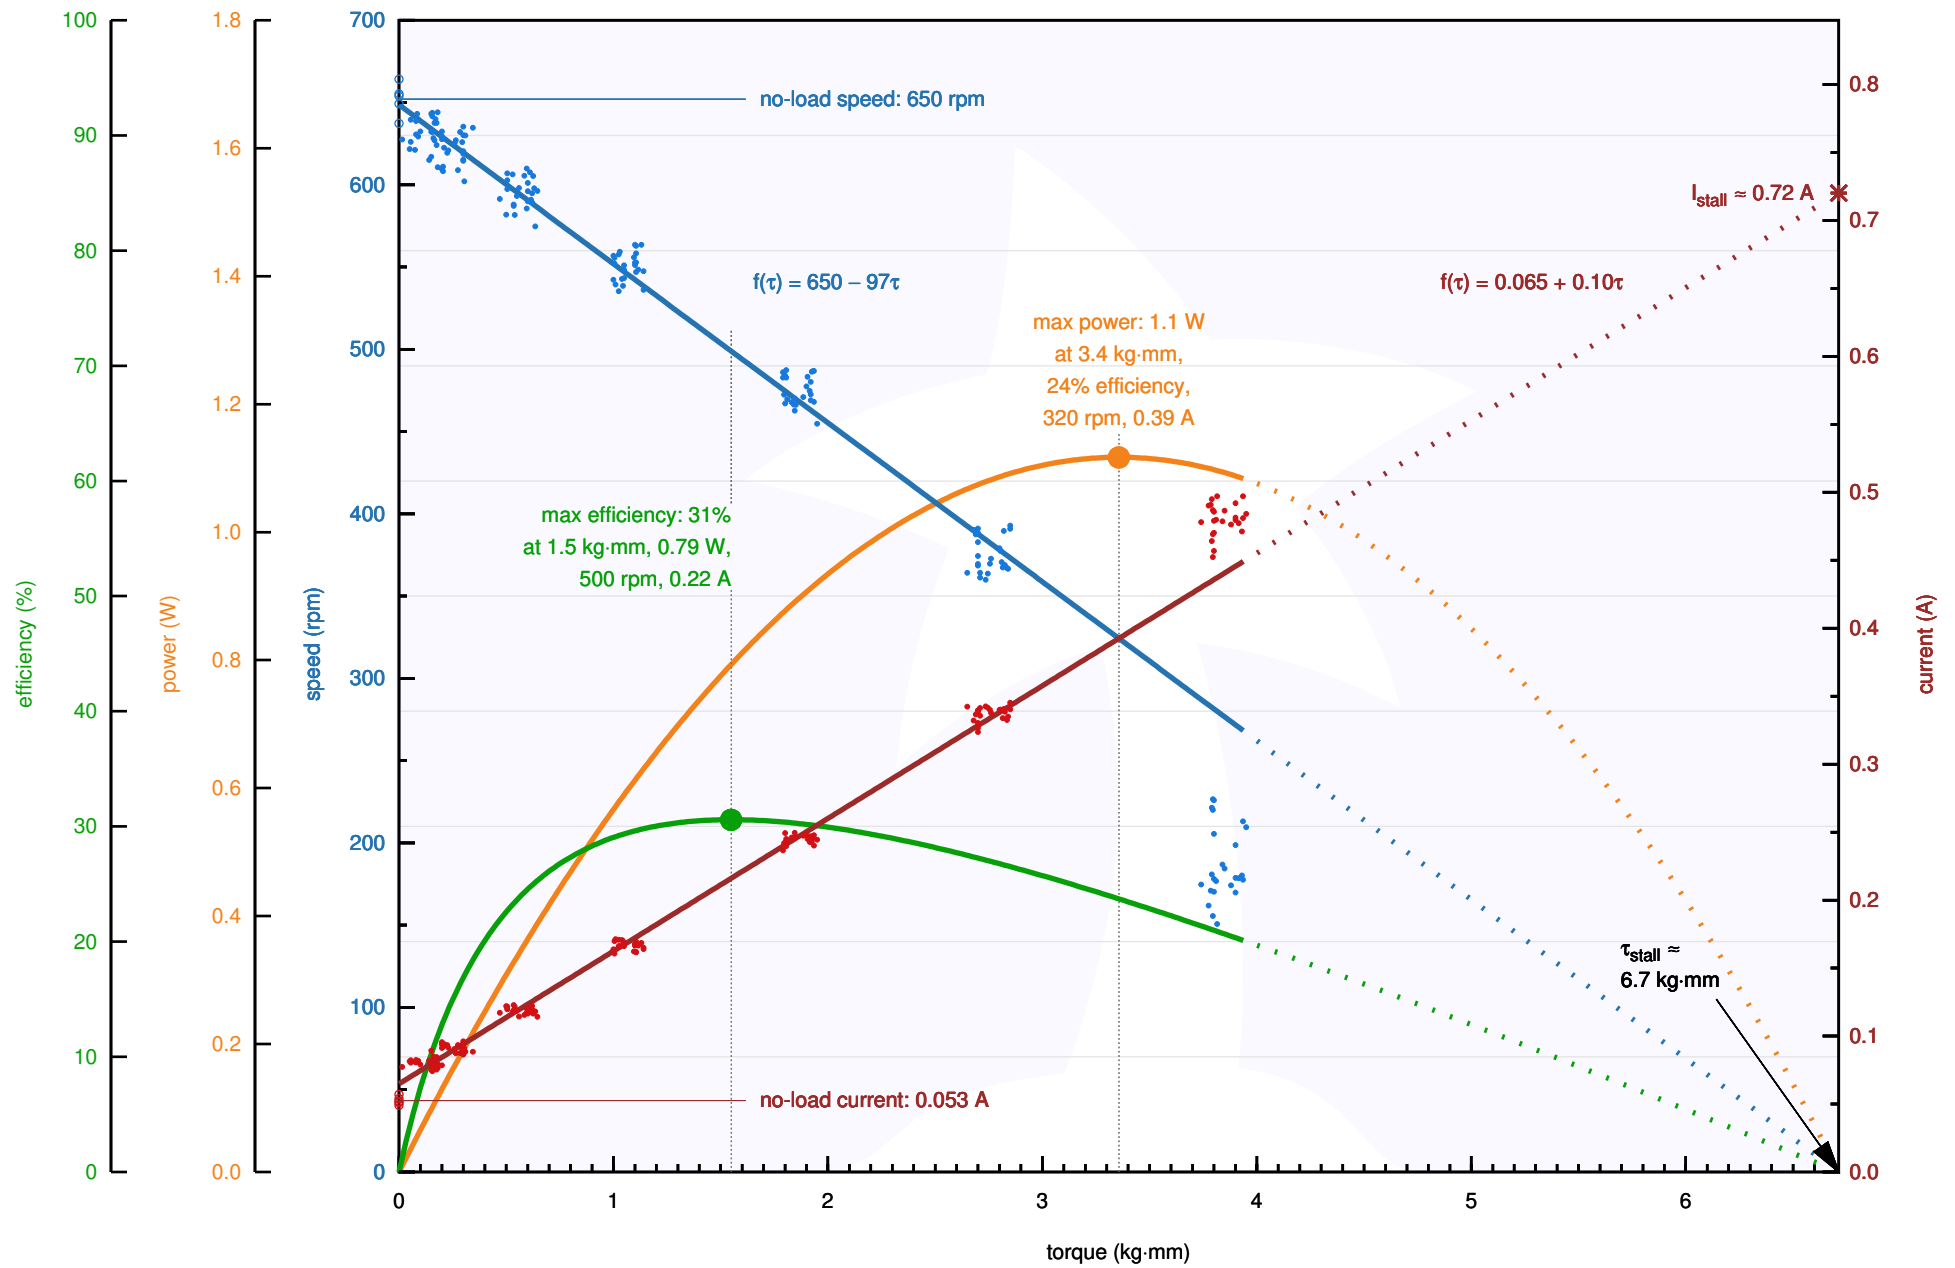


Pololu Items #3040, #3051 (75:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

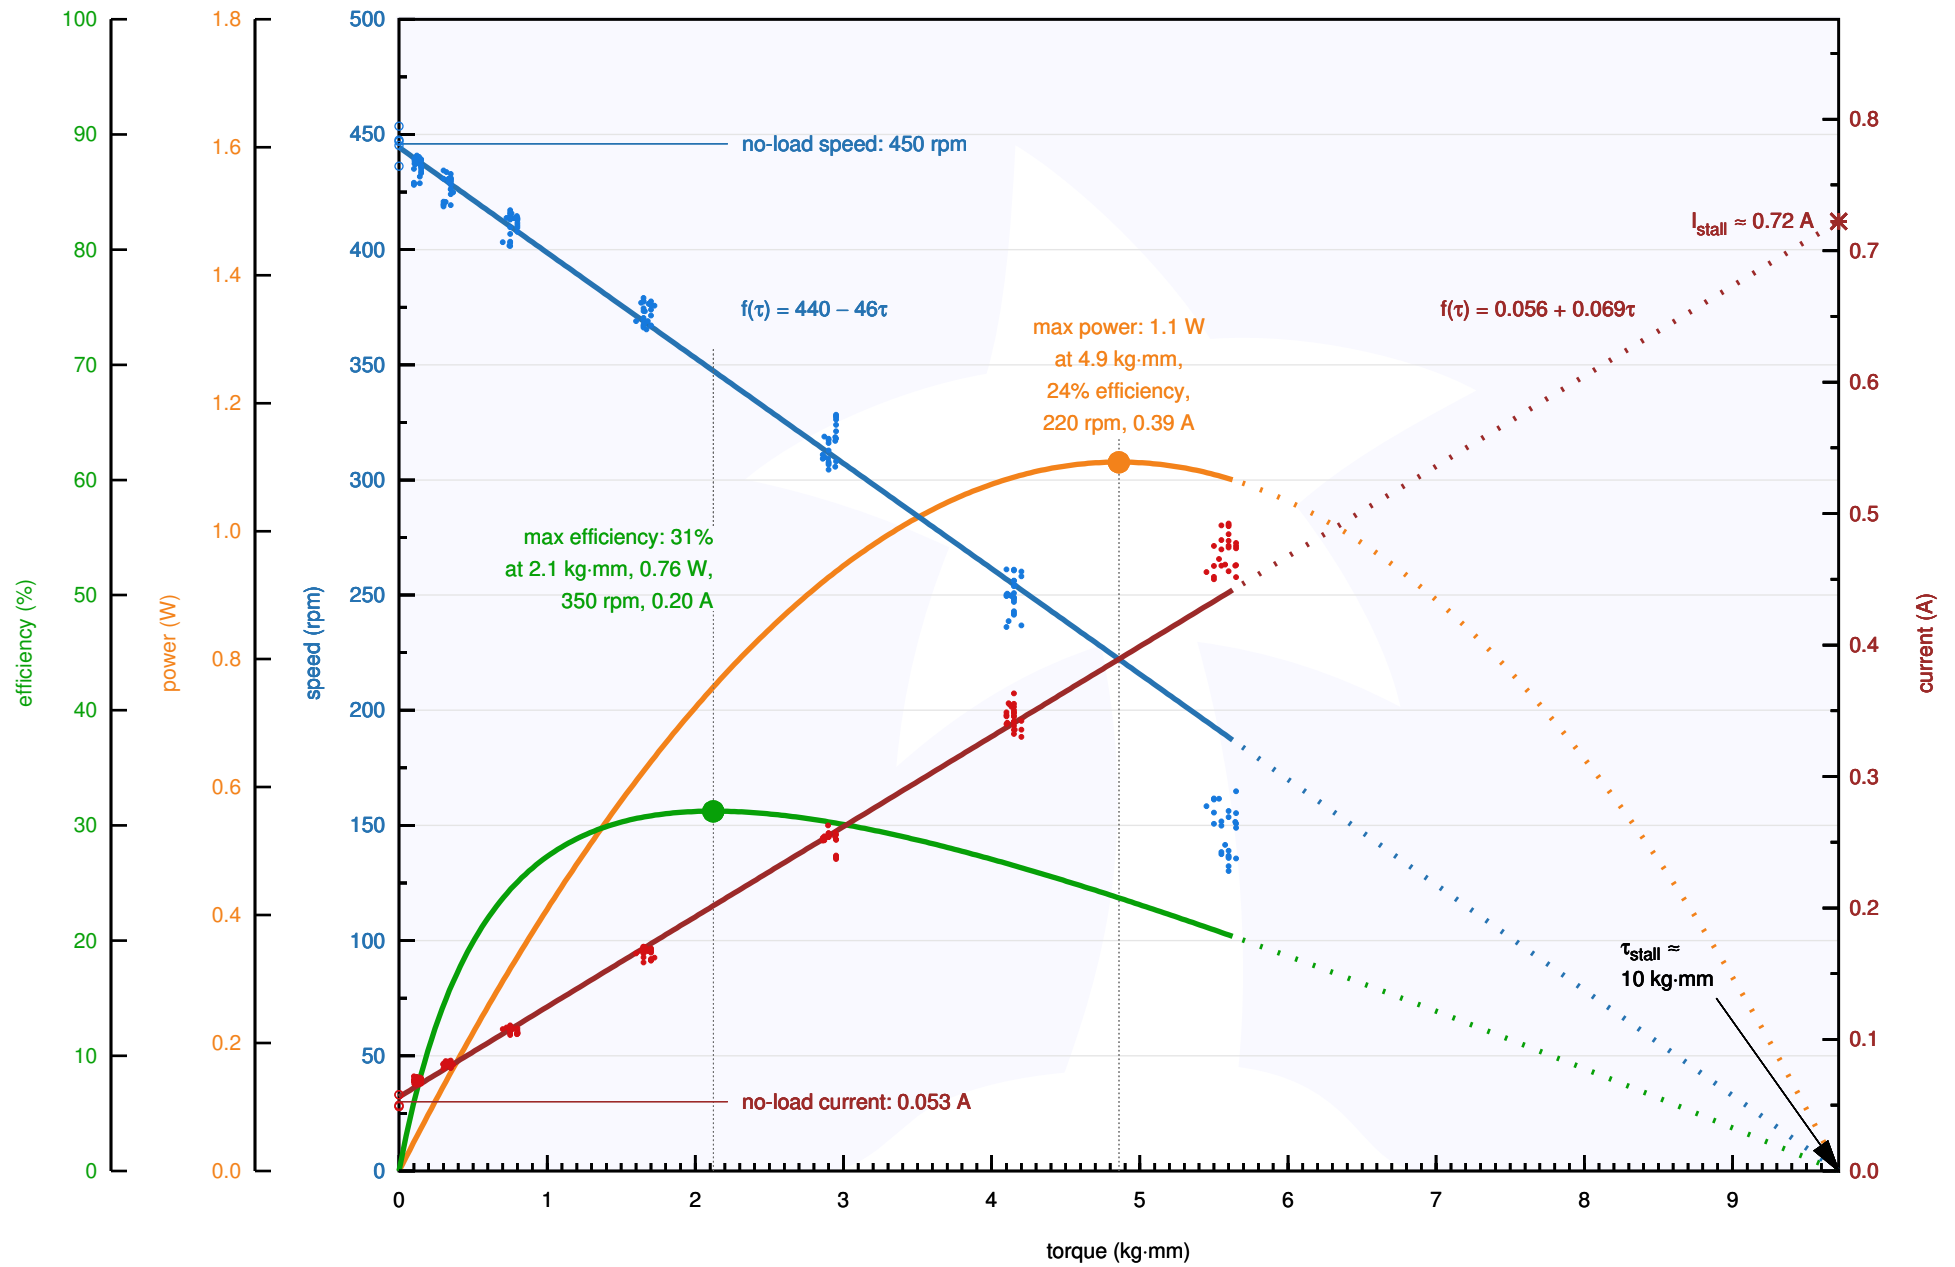


Pololu Items #3041, #3052 (100:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

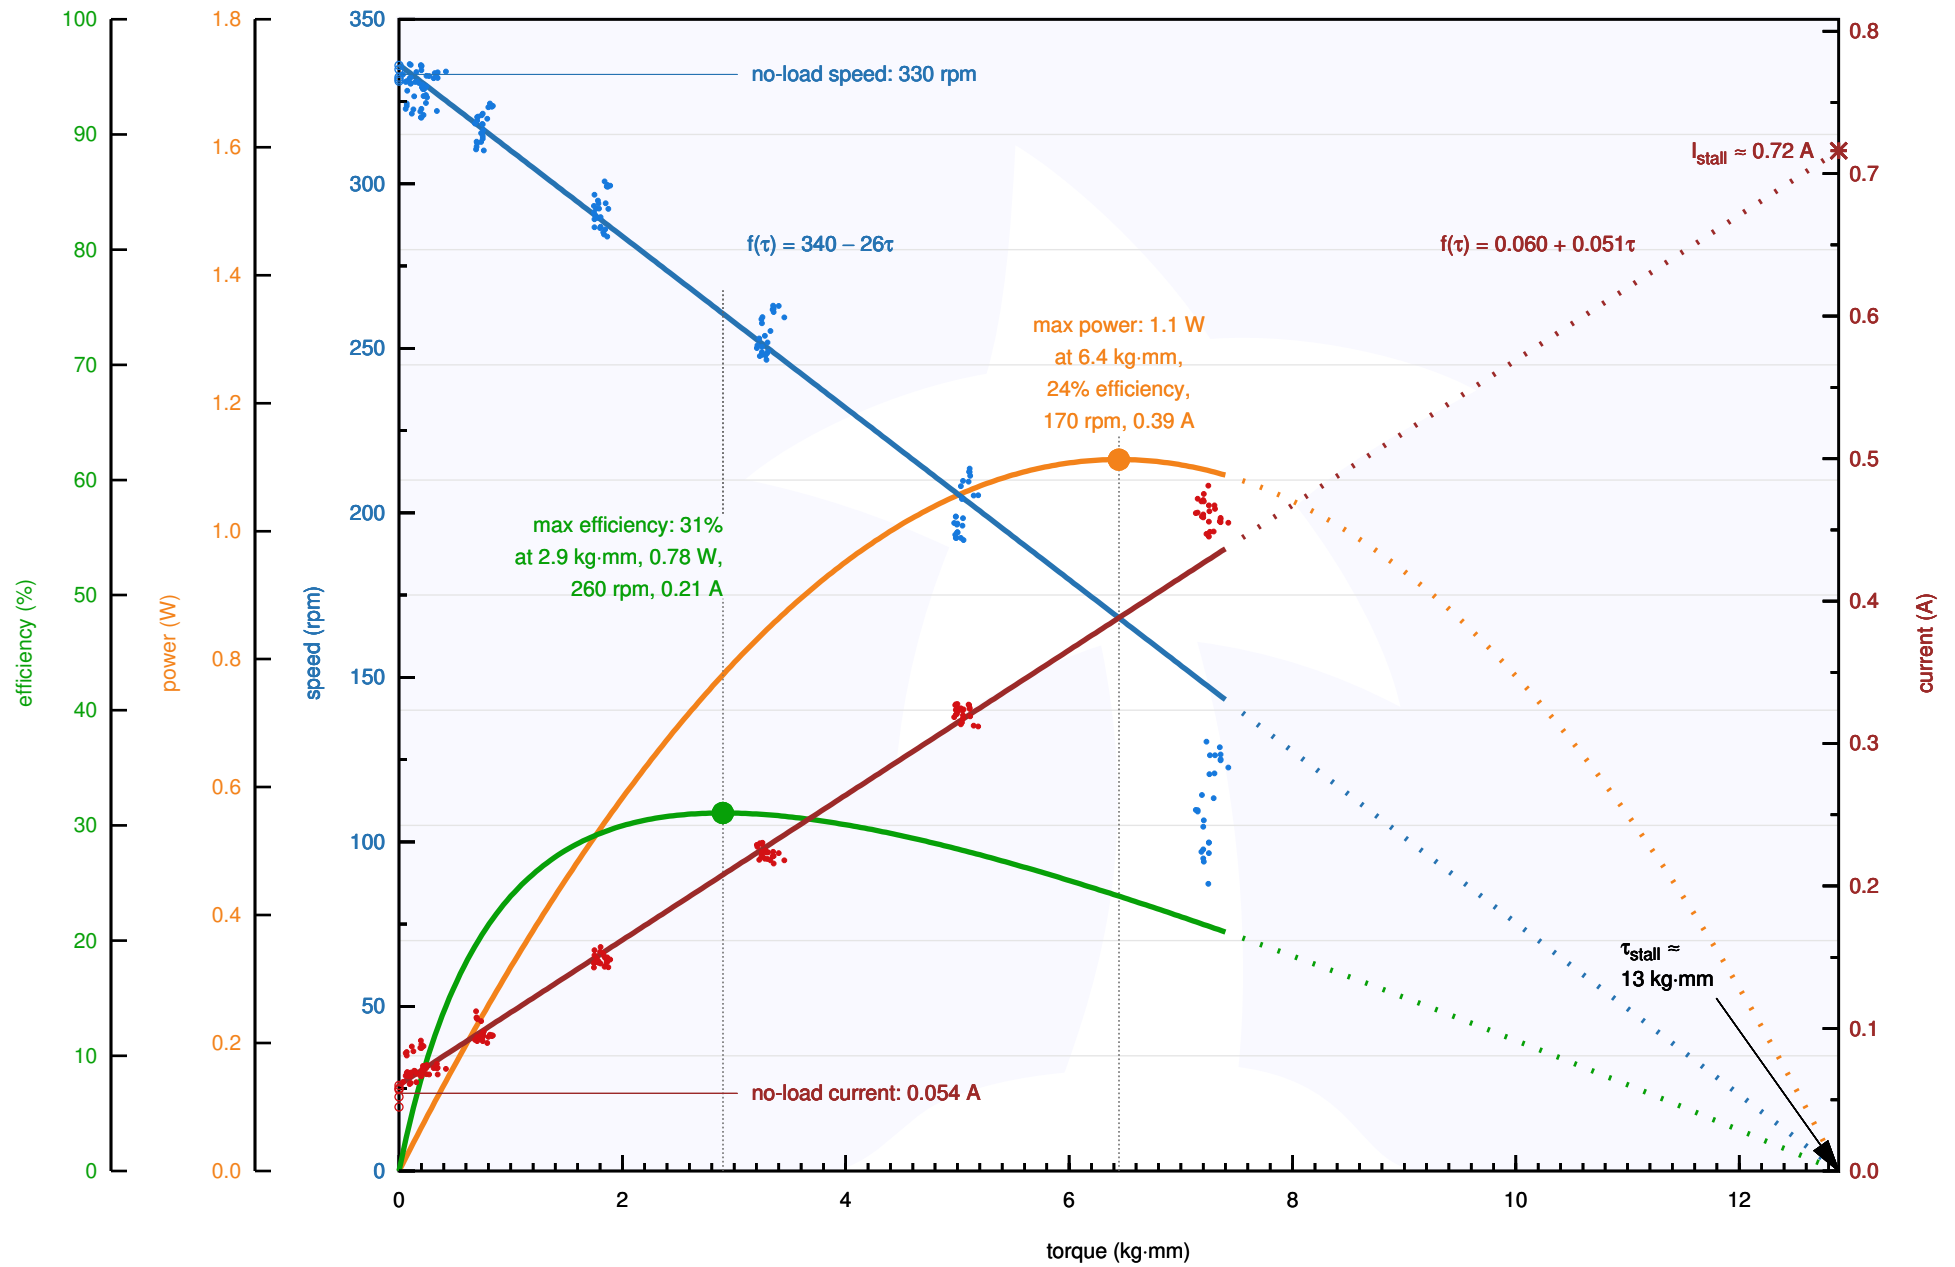


Pololu Items #3042, #3053 (150:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

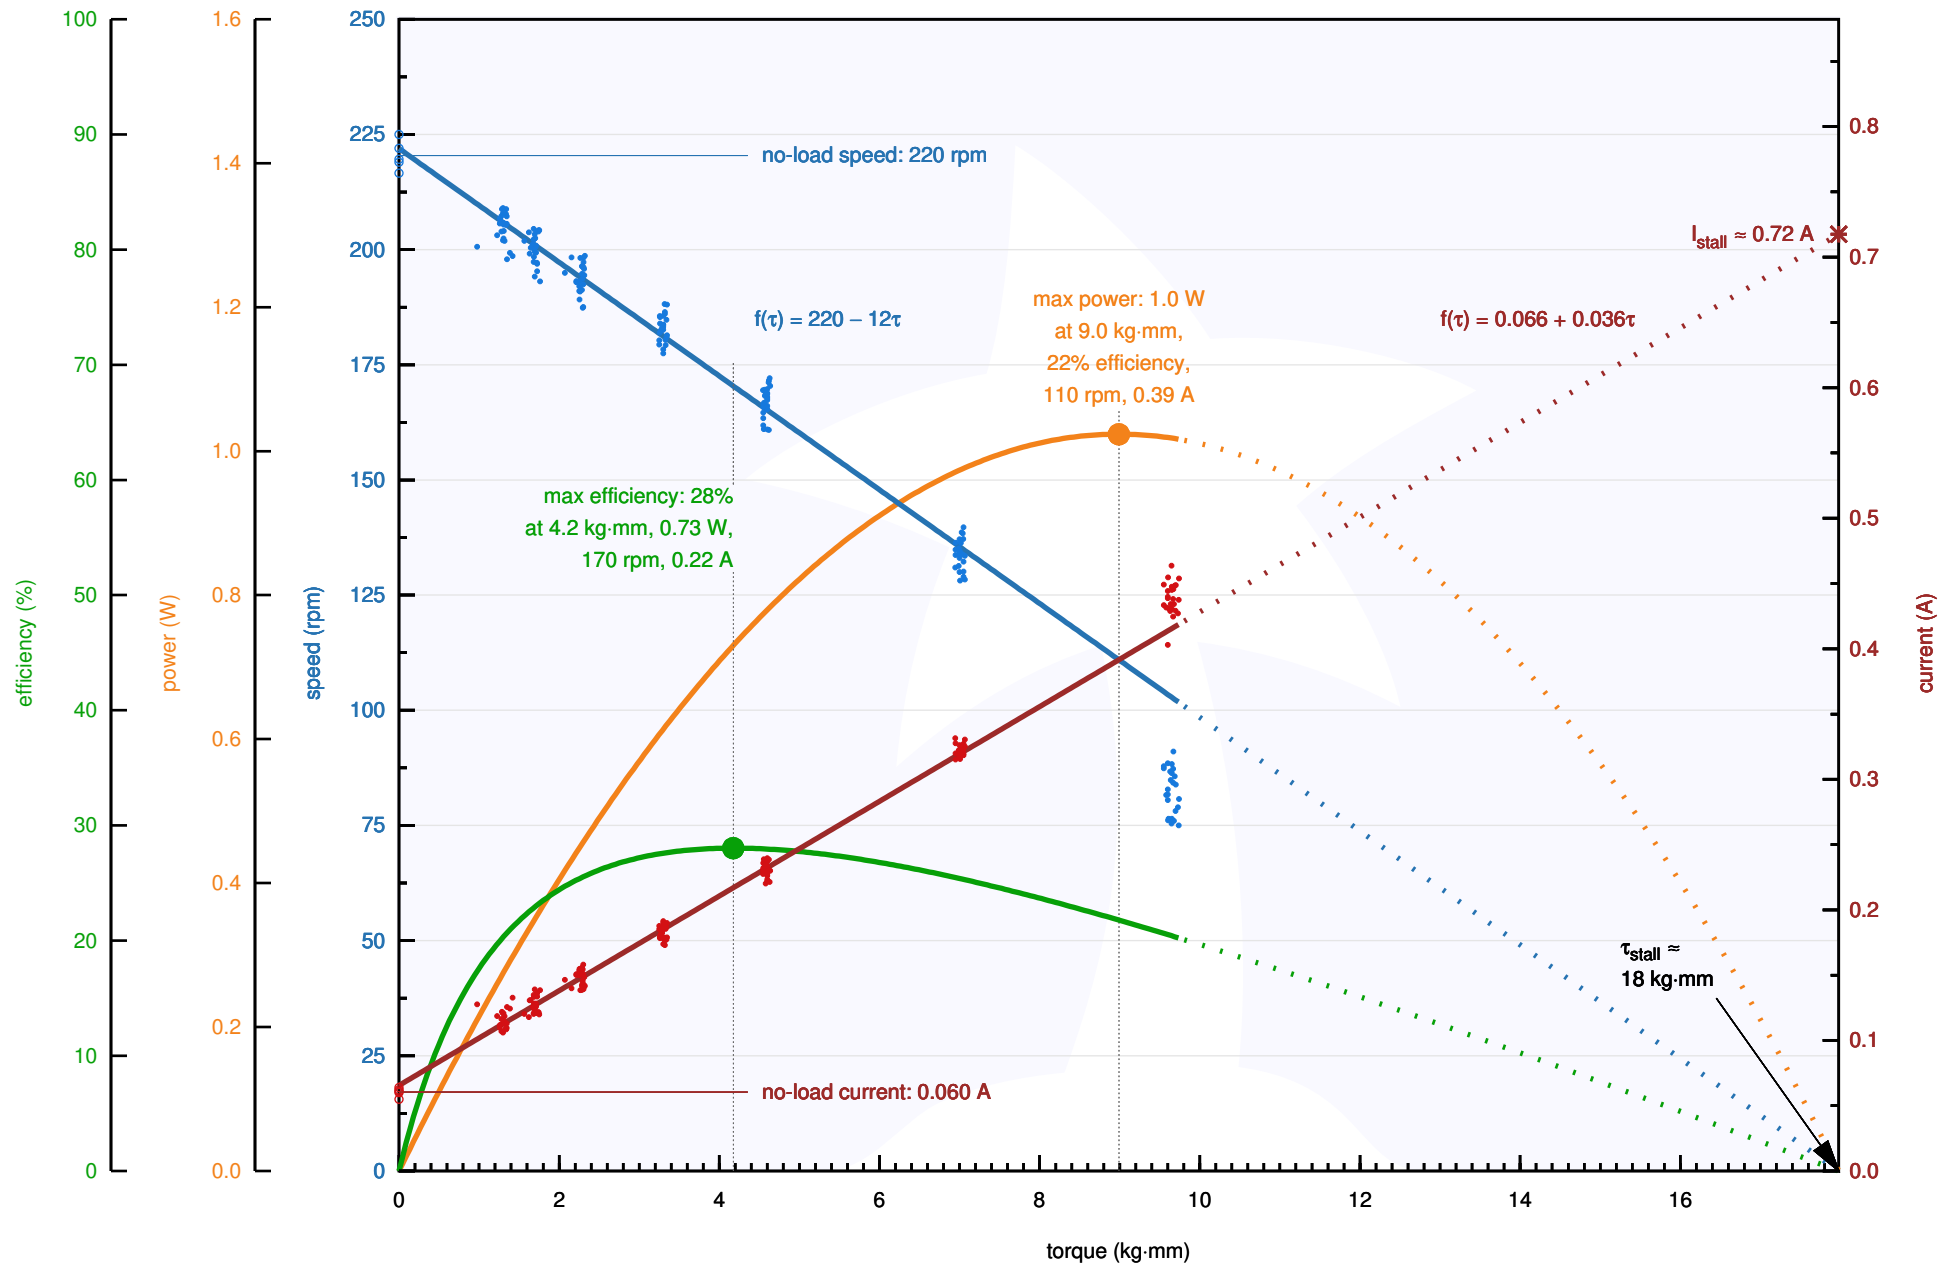


Pololu Items #3043, #3054 (210:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

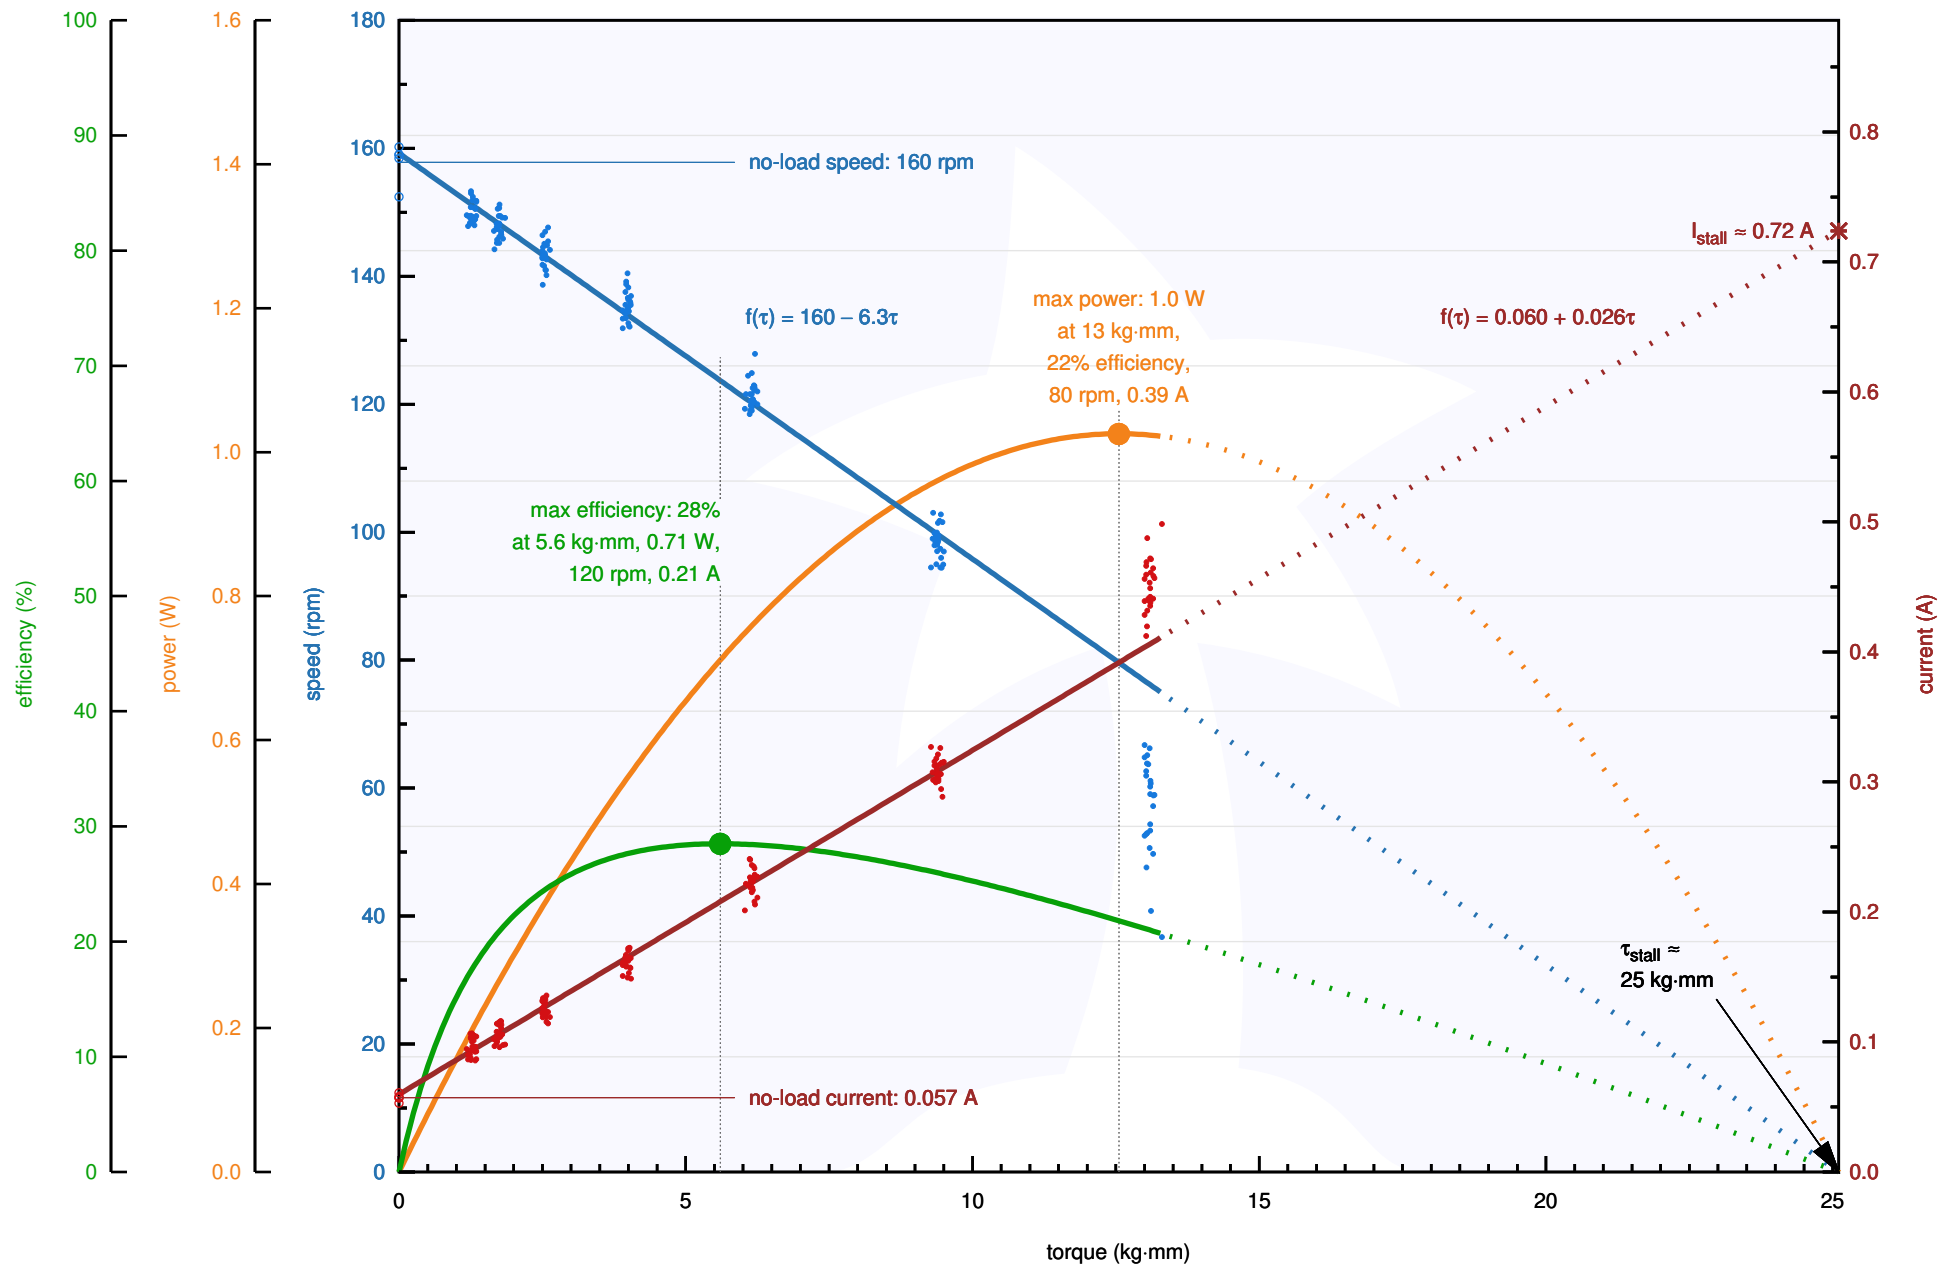

Pololu Items #3044, #3055 (250:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

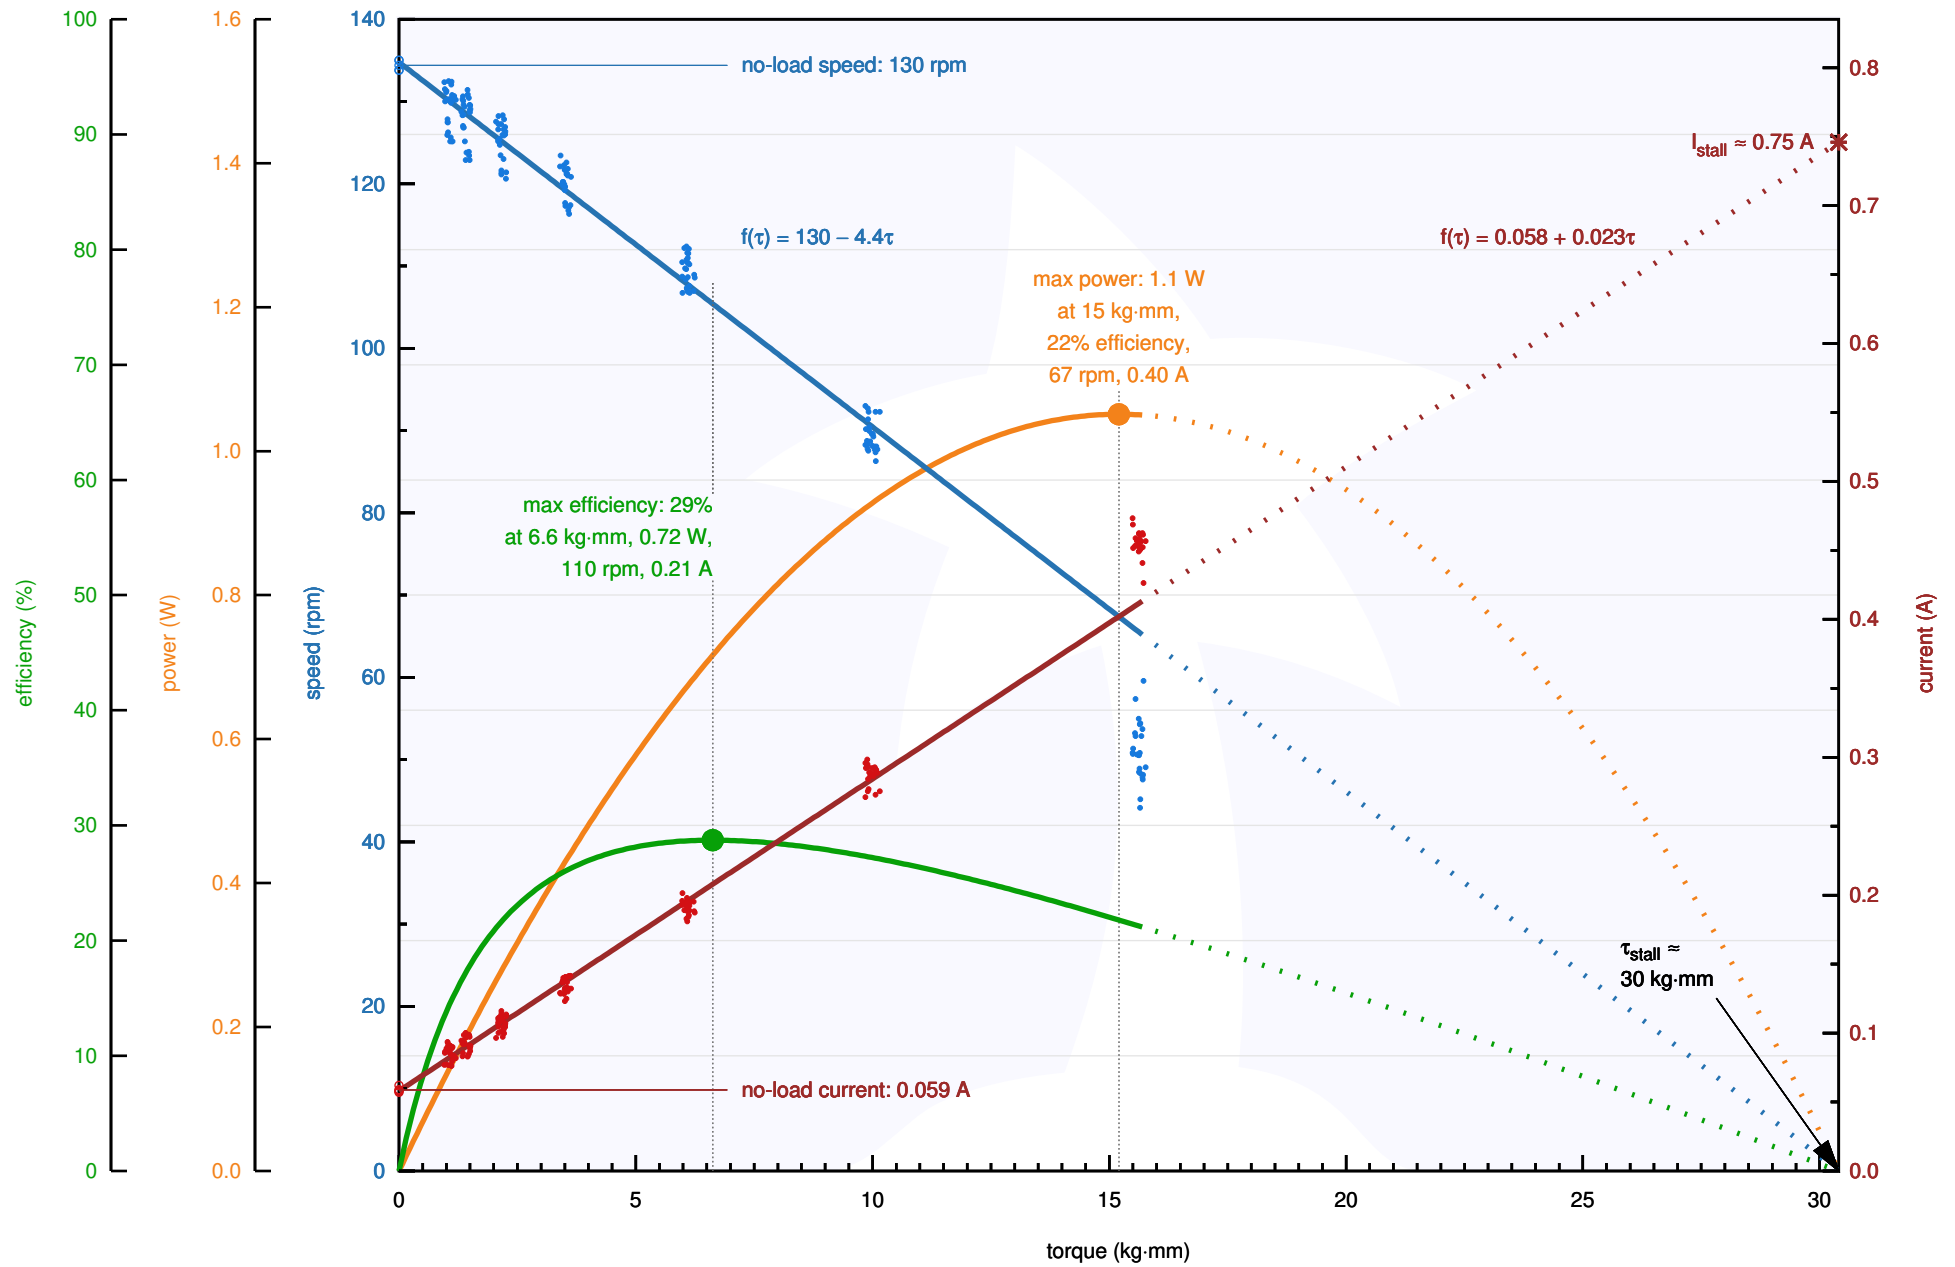

Pololu Items #3045, #3056 (298:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

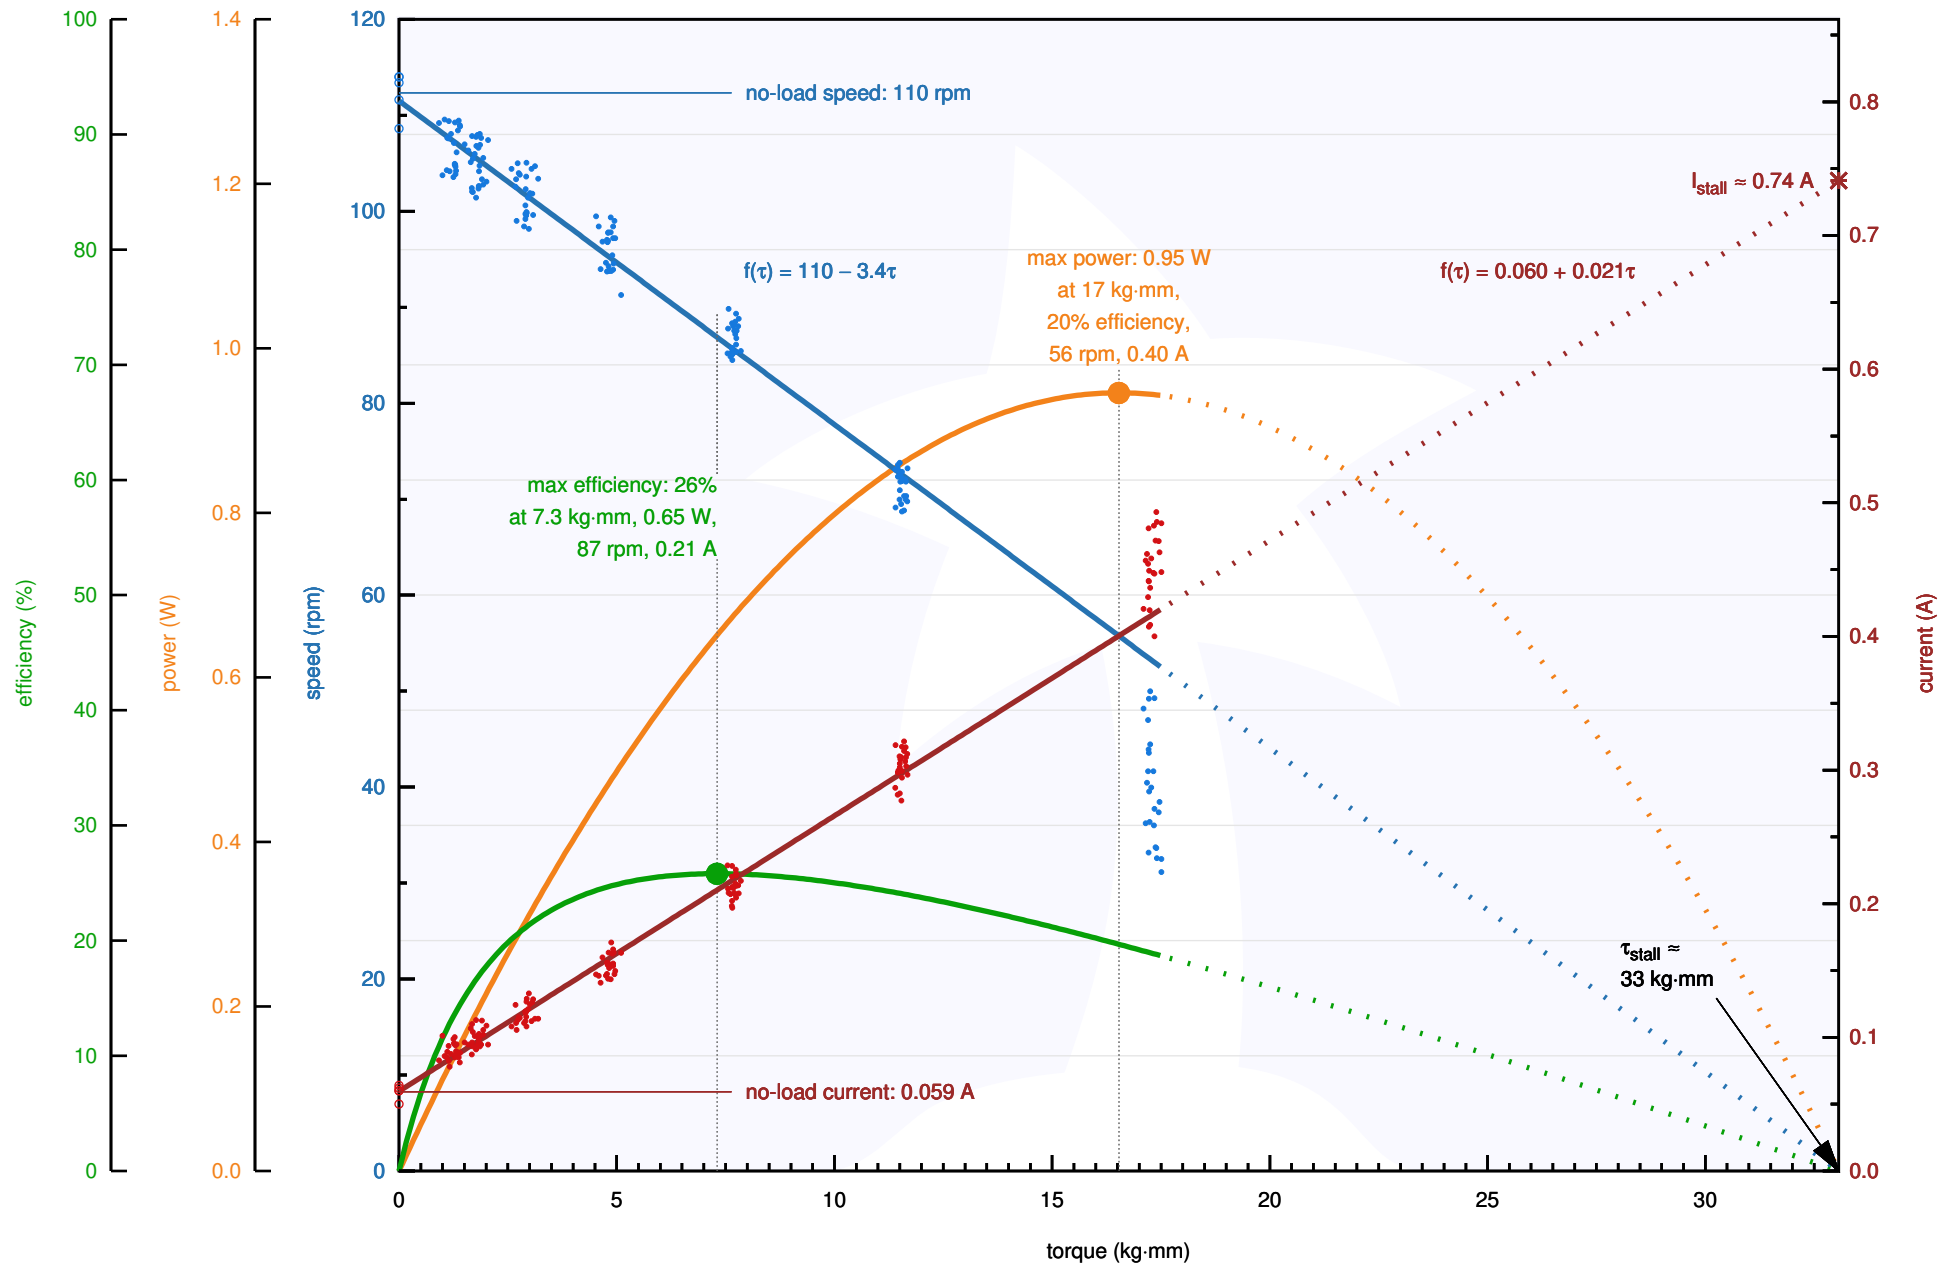

Pololu Items #3046, #3057 (1000:1 Micro Metal Gearmotor HPCB 12V) Performance at 12 V

