

REVISION RECORD			
REV	ECO	DESCRIPTION	DRFT

NOTES:

ELECTRICAL:

1. VOLTAGE RATING

:125 VAC RMS.
2. CURRENT RATING

:1.5 AMP.
3. CONTACT RESISTANCE

:30 MILLIOHMS MAX.
4. INSULATION RESISTANCE

:500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC STRENGTH

:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. HOUSING MATERIAL

:GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL

:PHOSPHOR BRONZE Ø0.46mm.
3. PLATING

:GOLD PLATING OVER NICKEL.
4. OPERATING

:750 CYCLES MIN.
5. SHIELDING

:0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
6. PCB RETENTION PRE-SOLDER

:1 LB MIN.




ENVIRONMENTAL:

1. Temperature Range


: -45°C~+85°C
2. Relative Humidity


: 90~95% (40±2°C)

PART NUMBER:

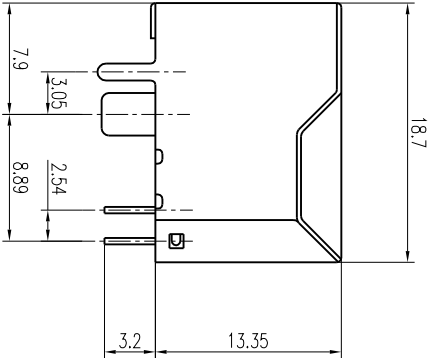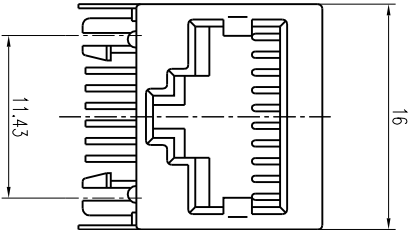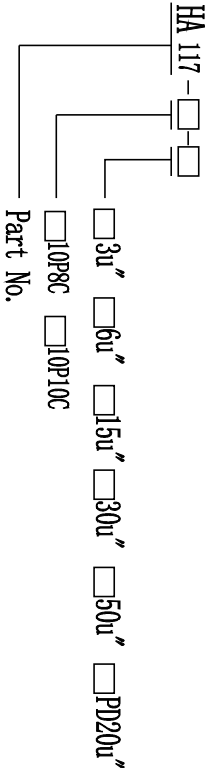

PCB LAYOUT

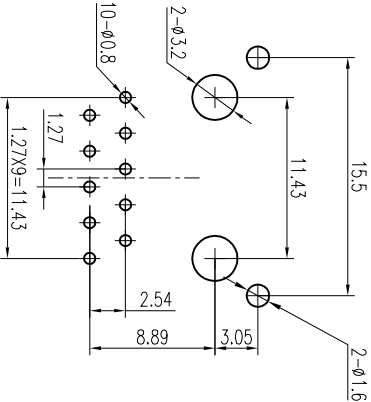

DETACHED LISTS			
<div><div>mm</div><div>(inch)</div></div> <div>Tolerance Except as Noted</div>	DATE:	HAE AM	
	DATE:		
	DATE:		
	DATE:		
<div><div>mm</div><div>0±0.2</div><div>00±0.15</div><div>000±0.075</div></div> <div>± ± ± ±</div>	APPLY:	117	
	DATE:		
ANNEALS ± 0.5	MATERIAL:	DRAWING NO.	
	Q`TY:		
	FINISH:		
	SCALE: 2:1		
<div><div></div></div>	DO NOT SCALE DRAWING	SHEET	OF