

UV-A Sensor

GUVA-C22SD




Features	Gallium Nitride Based Material Schottky-type Photodiode Photovoltaic Mode Operation Good Visible Blindness High Responsivity & Low Dark Current
-----------------	---



Applications	UV Index Monitoring UV-A Lamp Monitoring
---------------------	---

Outline Diagrams and Dimensions

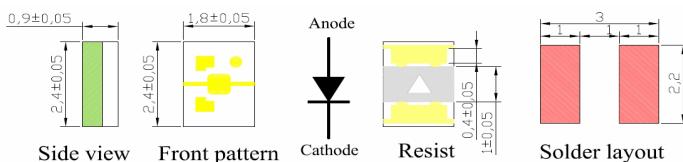

Absolute Maximum Ratings


Parameter	Symbol	Min.	Max.	Unit	Remark
Storage Temperature	T_{st}	-40	90	°C	
Operating Temperature	T_{op}	-30	85	°C	
Reverse Voltage	$V_{r, max.}$		5	V	
Forward Current	$I_{f,max.}$		1	mA	
Optical Source Power Range	P_{opt}	0.1	100,000	$\mu\text{W}/\text{cm}^2$	UVA Lamp
Soldering Temperature	T_{sol}		260	°C	within 10 sec.

※Notice: apply to us in the case that Optical Source Power is over $100,000\mu\text{W}/\text{cm}^2$.



Characteristics (at 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Dark Current	I_d			1	nA	$V_r = 0.1$ V
Photo Current	I_{ph}		113		nA	UVA Lamp, $1\text{mW}/\text{cm}^2$
			17		nA	1 UVI
Temperature Coefficient	I_{tc}		0.08		%/°C	UVA Lamp
Responsivity	R		0.14		A/W	$\lambda = 350$ nm, $V_r = 0$ V
Spectral Detection Range	λ	240		370	nm	10% of R
Active area			0.076		mm ²	

Responsivity Curve

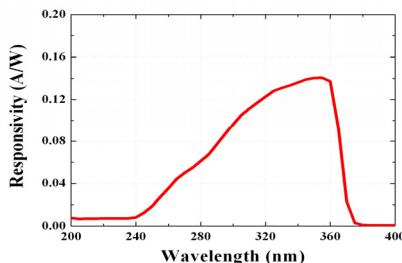

Photocurrent along UV Power

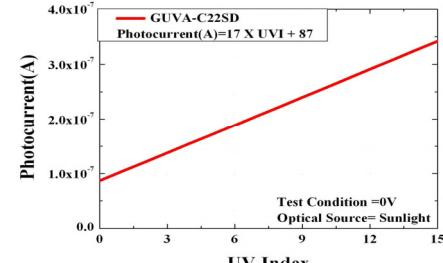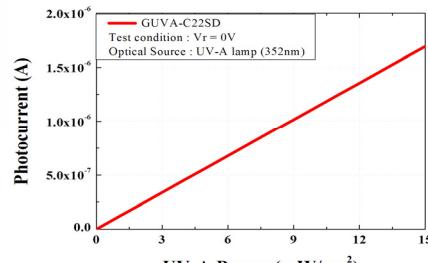

Caution

ESD can damage the device hence please avoid ESD.