
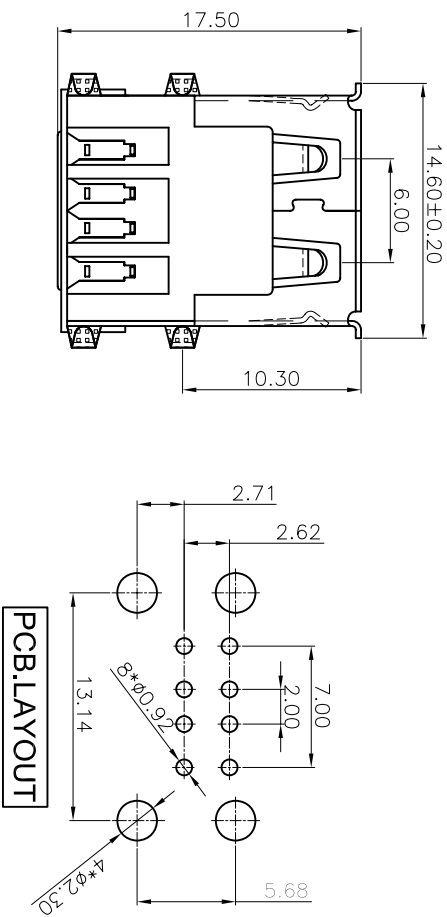


REV.	ECN.NO.	APPD.
A	/	pcy

NOTES:

- MATERIAL:
 - Housing:thermoplastic plastics
 - terminals:Copper Alloy
- Gold plated in contact area:
 - Tin plated in termination
 - Nickel Plated overall
 - Shell:Steel&Copper Alloy
- Nickel Plated overall
- ELECTRICAL CHARACTERISTICS:
 - Rating Current :1.5 Ampere
 - Rating Voltage :30 V Max
 - Contact Resistance:30 Milli ohms
 - Insulation Resistance:1000 Mega ohms Min.
- MECHANICAL CHARACTERISTICS:
 - Connector Mating force: 35N MAX(3.57kgf)
 - Connector Unmating force:10N min(1.02Kgf)
 - Durability:1500Cycles.
- ENVIRONMENT CHARACTERISTICS:
 - Operating temperature:-0℃ to +50℃
 - Storage temperature:-20℃ to +60℃

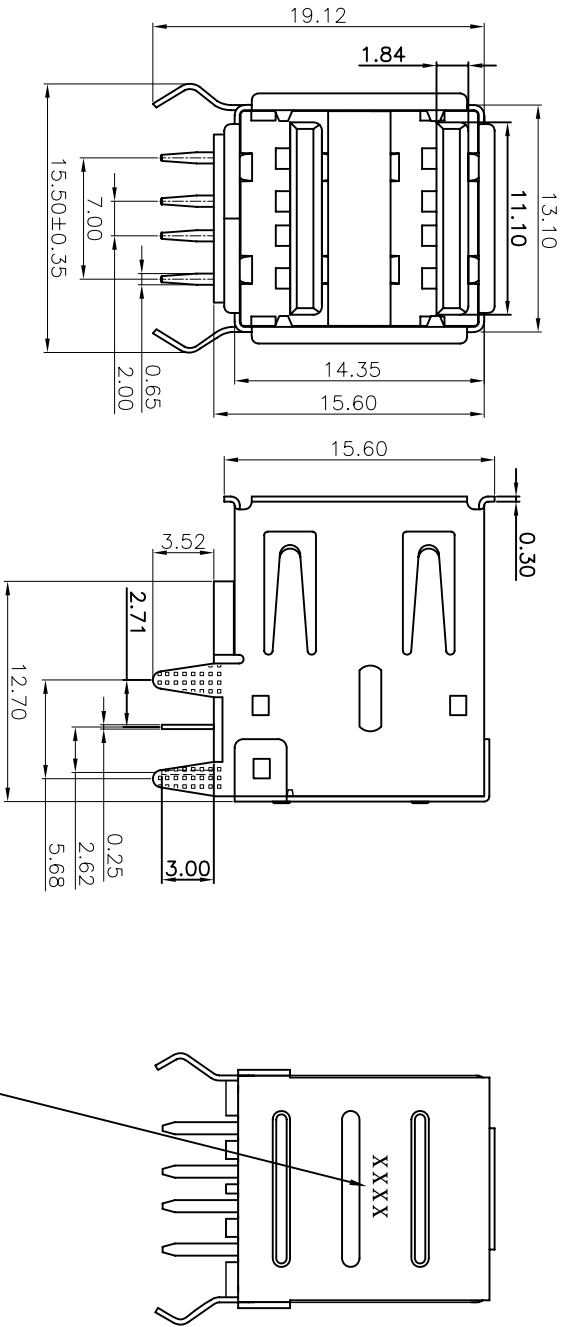

打字唛区
XXXX
月(08)
年(11)
例:
1108
2011年8月

U221-152X-XXXXXR

1:Iron alloy
Ni plating
5:Copper alloy
Ni plating
1:Au 1u"
3:Au 3u"
5:Au 5u"
7:Au 10u"
8:Au 15u"
A:Au 30u"

1:tray
2:Tube
8:Tape&Reel
9:Tape&Reel+Mylar
1:Black
2:White
3:Beige
N.Pure White
1:PA66
2:PBT
6:LCP

TOLERANCE UNLESS OTHERWISE SPECIFIED		HLW 深圳市华联威电子科技有限公司	
XXX ±0.10	X' ±3	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO.,LTD.	
XX ±0.25	.X' ±2		
X ±0.35			
APPROVED		PART NAME:	USB AF 90度 双层半包无弹
CHECKED		PART No:	U221-152X-XXXXXR
DRAWN	pengchooyong	PROJECTION:	UNIT: SCALE SHEET REV.
DATE	2014.11.20		mm 1:1 10F1 A