

# 4.2mm Pitch Wire to Board

## CHD 1140-N Crimp Terminal Housing

### Features And Specifications

#### Electrical

- Voltage Rating : 250VAC max
- Current Rating : 9A max
- Contact Resistance : 30m $\Omega$  max
- Insulation Resistance : 1,000M $\Omega$  min
- Dielectric Withstanding Voltage : 1,000VAC for 60 seconds

#### Physical


- Housing : Nylon66, UL94V Grade
- Operating Temperature : -40°C ~ +105°C

#### Reference Information

- Mates With : CHDW1140-N, LWD1140-N, LAD1140-N Series
- Use With : CTD1140
- Packing : Bag
- UL File No : E92854
- Designed In : Millimeters



### Dimensions (For Reference Only)

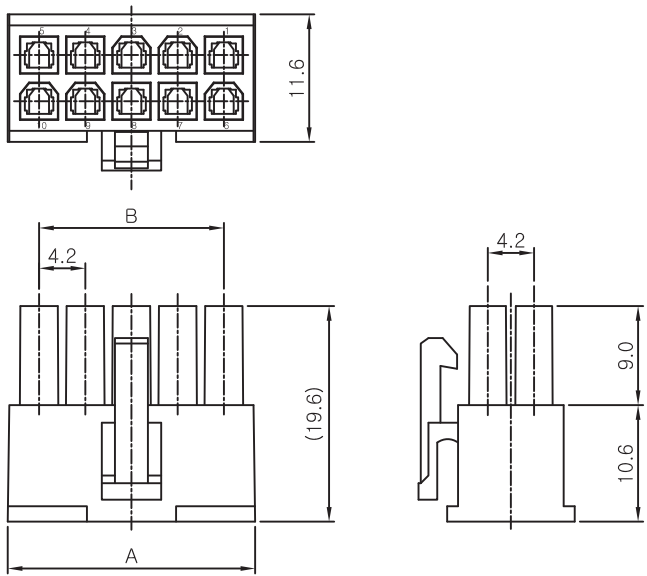

### Ordering Information And Dimensions

CKT	MODEL NO.	A	B	CKT	MODEL NO.	A	B
2	CHD1140-02	5.40	-	14	CHD1140-14	30.60	25.20
4	CHD1140-04	9.60	4.20	16	CHD1140-16	34.80	29.40
6	CHD1140-06	13.80	8.40	18	CHD1140-18	39.00	33.60
8	CHD1140-08	18.00	12.60	20	CHD1140-20	43.20	37.80
10	CHD1140-10	22.20	16.80	22	CHD1140-22	47.40	42.00
12	CHD1140-12	26.40	21.00	24	CHD1140-24	51.60	46.20