

技术参数 (SPECIFICATION):

温度范围 (TEMPERATURE RANGE): -40 ~ +70℃

额定电压 (VOLTAGE RATING): 125V

额定电流 (CURRENT RATING): 1.5A

接触电阻 (CONTACT RESISTANCE): $\leq 30m\Omega$

绝缘电阻 (INSULATION RESISTANCE): $\geq 500M\Omega$

耐压 (DIELECTRIC STRENGTH): 1000V AC (50HZ)/min

插拔力 (MATING AND UNMATING FORCE): 3 ~ 20N

寿命 (DURABILITY): 750 CYCLES MIN


材料 (MATERIAL):

基座 (HOUSING): PBT UL94V-0

插针 (CONTACT): PHOSPHOR BRONZE $\phi 0.46mm$

镀层 (PLATING): GOLD PLATING OVER NICKEL

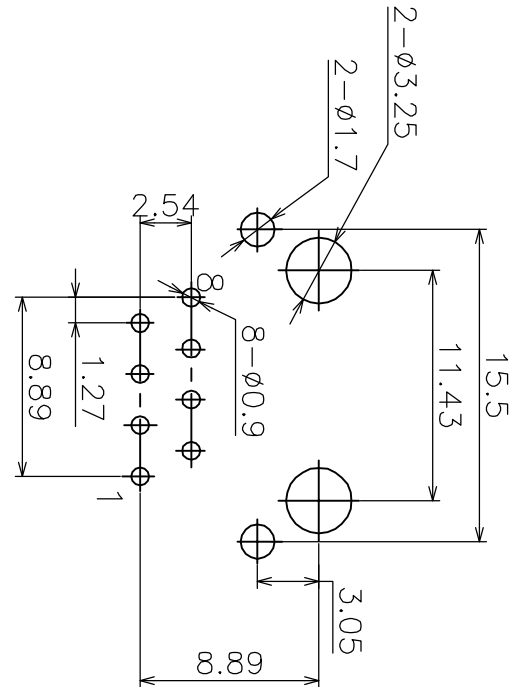

外壳 (SHIELD): COPPER ALLOY $t=0.2mm$ PLATING NICKEL



BOTTOM VIEW

PCB LAYOUT BOTTOM VIEW
RECOMMENDED

网络插座外形图

网络插座外形图										网络插座									
绘 图：					日 期：					品 名：									
审 核：					日 期：					料 号：									
核 准：					日 期：					型 号：									
										RCH-59-01 (无灯无弹后脚3.05)									
										RJ45									
										图 号：									
										单位:mm									
										比例: 1:1									
										纸张: A4									
																			
																			
网络插座										G									
一般公差																			
>30~										±0.45									
>10~30										±0.35									
~10										±0.25									
角 度：										±5°									
页 面：										1 of 1									
版本：																			
部 用, 不 得 私 自 复 印																			
禁 止 在 图 面 上																			
版 次																			
1																			
2																			
3																			
变 更 单 号																			
绘 制																			
日 期																			
变 更 履 历																			
A/0										新 出 版 发 行									