

#### Instruction:

- 1.Type:Film to Glass
- 2.Operating Voltage:  $\leq 10V$
- 3.Response Time:  $\leq 10ms$
- 4.Storage Temperature:  $-20^{\circ}\sim+70^{\circ}$
- 5.Operation Temperature/Humidity :  $-10^{\circ}\sim+60^{\circ}/ 20\%\sim95\%$
- 6.Hitting Life:  $>1,000,000$  Times ,250gf Force;
- 7.writing Life  $>100,000$  Times 250gf Force;
- 8.Connect Material: FPC


- 9.Film Thickness: 0.188mm
- 10.Glass Thickness: 1.1mm
- 11.Light transmission:  $\geq 78\%$
- 12.Force: 100g or more
- 13.Linearity:  $\leq 1.5\%$
- 14.Insulation:  $\geq 20M\Omega$
- 15.Resistance: Y:  $170\Omega\sim330\Omega$   
X:  $500\Omega\sim1100\Omega$
- 16.Surface Hardness  $\geq 3H$ (pencil)

Version	MARK	MODIFY	DATE
3.0	FPC	FPC	20091224

Thick:  $1.4\pm 0.15$

hard coating anti newton ring  
 Front ITO film 0.188mm

Back ITO glass 1.1mm

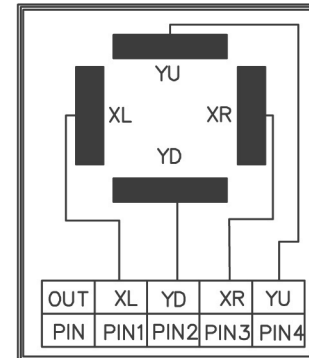

WVT-TP4-10.1A2

#### REVISIONS

SCALE	1:1	MATERIAL	F/G	Version	4.0
UNIT	mm	TOLERANCE	$\pm 0.3mm$	NO.	1 of 1
DESIGN	Lucy	DATE	20100108		
CHECK	Peter + Li	DATE	20100108		
RELEASE	Victor	DATE	20100108		