

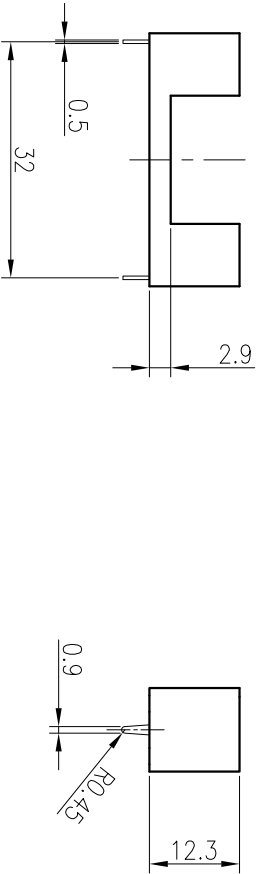


REVISIONS			APPROVED
No.	DATE		
①	11.11.22	프레임 치수변경 (18.7→17.5 / 9.0→8.5) - 06.08.08일자로 변경됨.	
②			

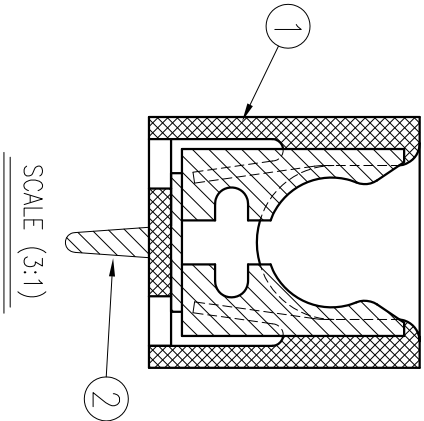

COMMERCIAL TOLERANCE			
0.5 to	3	± 0.12	
over 3 to	6	± 0.16	
over 6 to	10	± 0.18	
over 10 to	18	± 0.22	
over 18 to	30	± 0.25	
over 30 to	50	± 0.30	
over 50 to	80	± 0.35	
over 80 to	120	± 0.45	

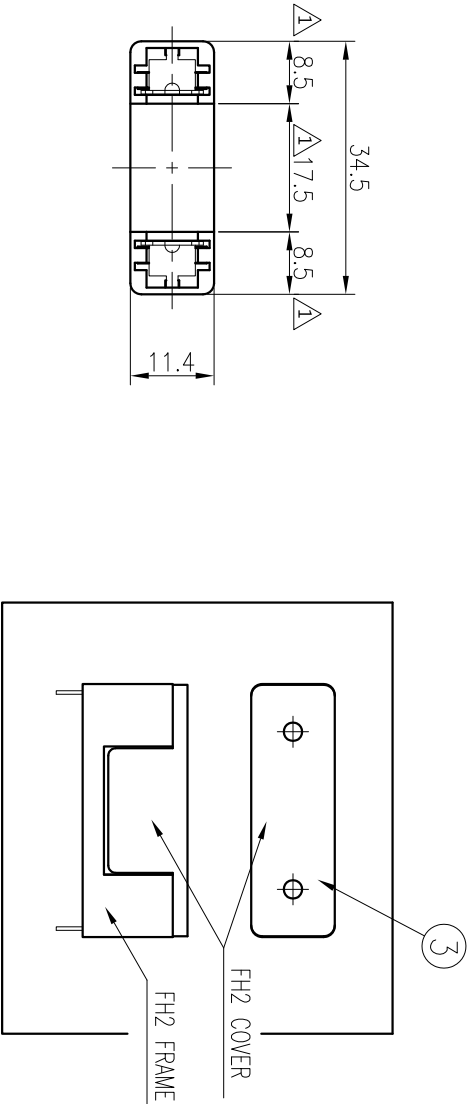

SPECIFICATION

- 1.정격 : 250V 10A
- 2.절연 저항 : DC 500V 1000MΩ 이상
- 3.내전압 : AC2000V/min
- 4.사용온도범위: -40°C ~ 85°C

* 본 제품은 유해물질 관리 기준치를 초과하지 않는 제품임. (RoHS Compliance)

DRAWN	CHECKED	APPROVED	DATE		2011.11.22			UNIT	SCALE			
W.R. KIM						mm		1:1				
11.11.22												
									飛龍電子株式會社		BEE-RYONG ELECTRONICS CO.,LTD	
DWG. NO.			TITLE			BR - FH2			BRT - 450			
No.			③			COV-FH2			COVER			
PART NO.			②			DAN-FH2			TERMINAL			
PART NO.			①			SAC-FH2			FRAME			
PART NAME												
MATERIAL						PBT			1			
Q'TY						2			C2680R 1/2H to.5			
REMARKS						UL94V-0 (G30)			BK			
FINISH												



飛龍電子株式會社

BEE-RYONG
ELECTRONICS CO.,LTD