




REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JUL-28-2007
B	UPDATE LOGO	NOV-28-2007

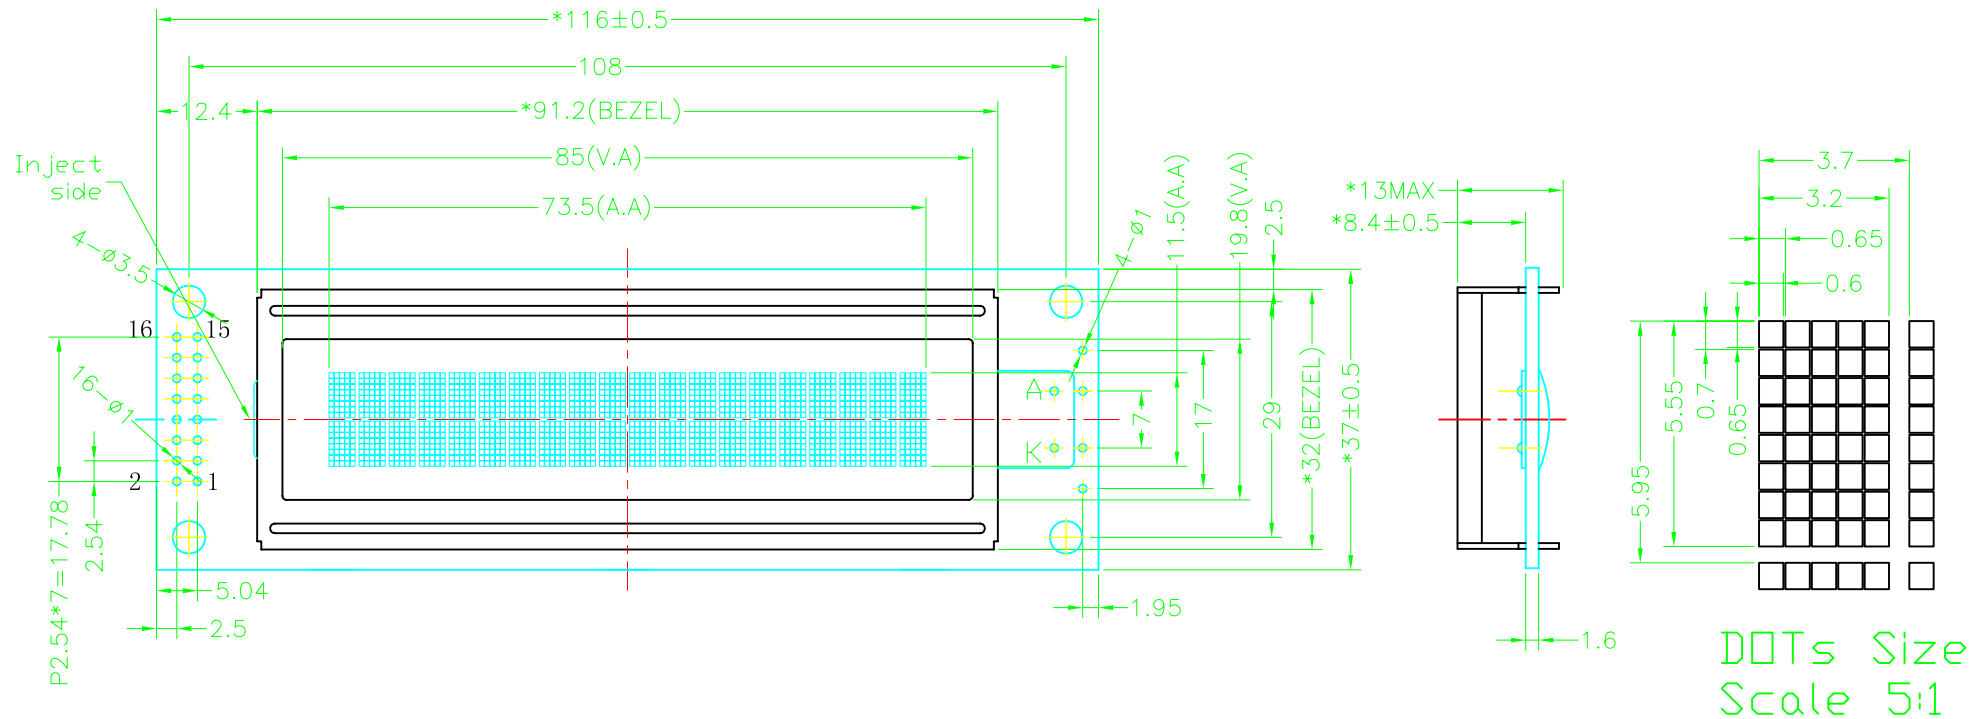

Specification:

- 1). Driving: Duty: 1/16, Bias:1/5, VLCD:4.5, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Y-G/Positive/Transmissive
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SPLC780D-001B-C (or compatible)
- 6). Backlight: Bottom, Y-G
- 7). Dimensions with mark "*" are important,
with mark "()" are referenced
- 8). All the raw materials are ROHS compliant

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

 深圳秋田微电子有限公司 SHENZHEN AV-DISPLAY CO.,LTD.		SCALE: 比例 FIT 适应图面		
		SHEET: 页次 1 OF 1		
		GENERAL TOL: 未注公差 ±0.3	UNIT 单位 mm	
PART NO: 零件编码 C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	DATE 日期
ABC020002A08-YIY-R		ABC020002A08-YIY-R	APP:	
		DO NOT SCALE THIS DRAWING.	CHK:	
			DWN:	