

REVISION RECORD			
REV	ECO	DESCRIPTION	DRFT

NOTES:

ELECTRICAL:

1. VOLTAGE RATING

:125 VAC RMS.
2. CURRENT RATING

:1.5 AMP.
3. CONTACT RESISTANCE

:30 MILLIOHMS MAX.
4. INSULATION RESISTANCE

:500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC STRENGTH

:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. HOUSING MATERIAL

:GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL

:PHOSPHOR BRONZE  $\phi$ 0.46mm.
3. PLATING

:GOLD PLATING OVER NICKEL.
4. OPERATING

:750 CYCLES MIN.
5. SHIELDING




:0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
6. PCB RETENTION PRE-SOLDER

:1 LB MIN.

ENVIRONMENTAL:

1. Temperature Range : -45°C~+85°C
2. Relative Humidity : 90~95% (40±2°C)

PART NUMBER:

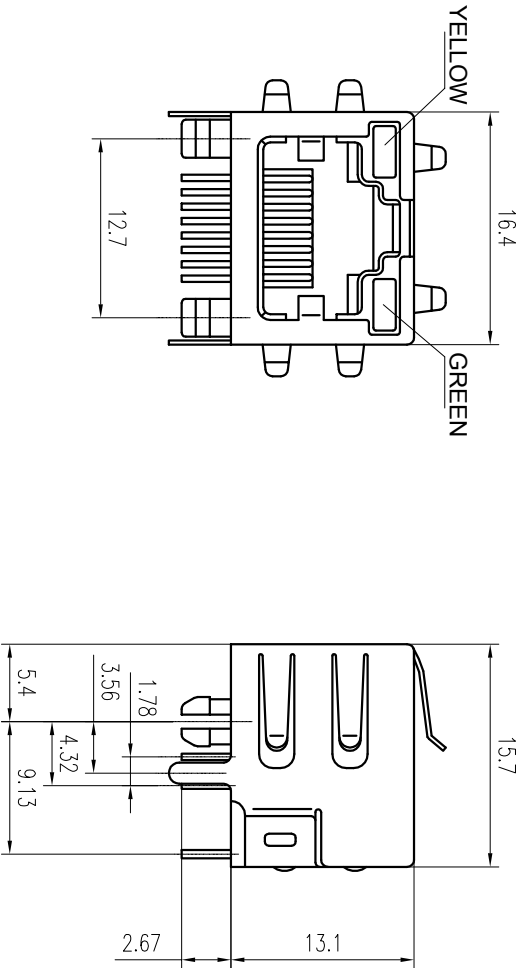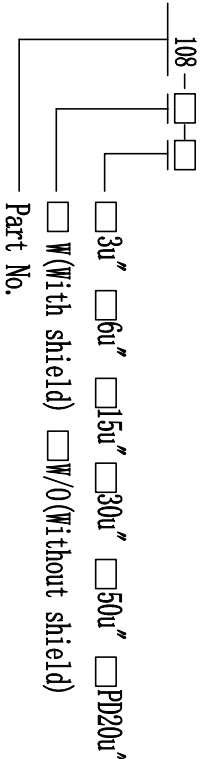

PCB LAYOUT

DETACHED LISTS									
<div><div>mm</div><div>(inch)</div></div>		DATE:							
		CHKD:							
Tolerance Except as Noted		DATE:							
MFO:		DATE:							
APPL:		DATE:							
0±0.2									
00±0.15									
000±0.075									
± ± ± ±		MATERIAL:							
ANGLES ± 0.5		QTY:							
		FINISH:							
SCALE: 2:1		/PART NO.							
DO NOT SCALE DRAWING			SHEET		OF				
			SIZE		REV				
			A4		06/06/02				
			0						