
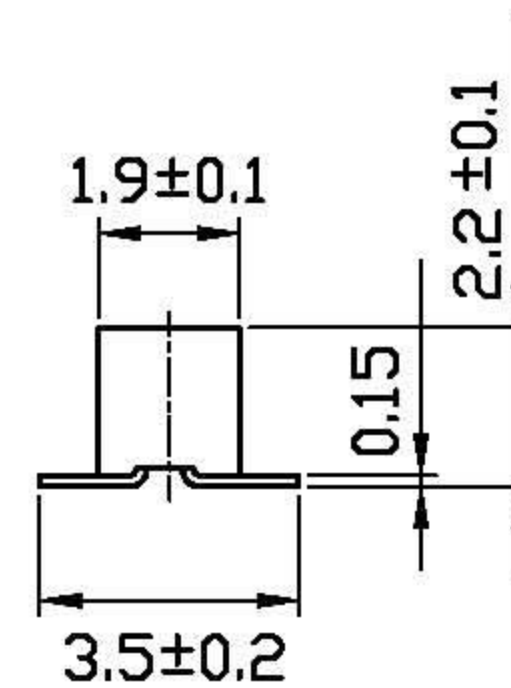


REV	ECN. NO.	APP.	DATE
B			

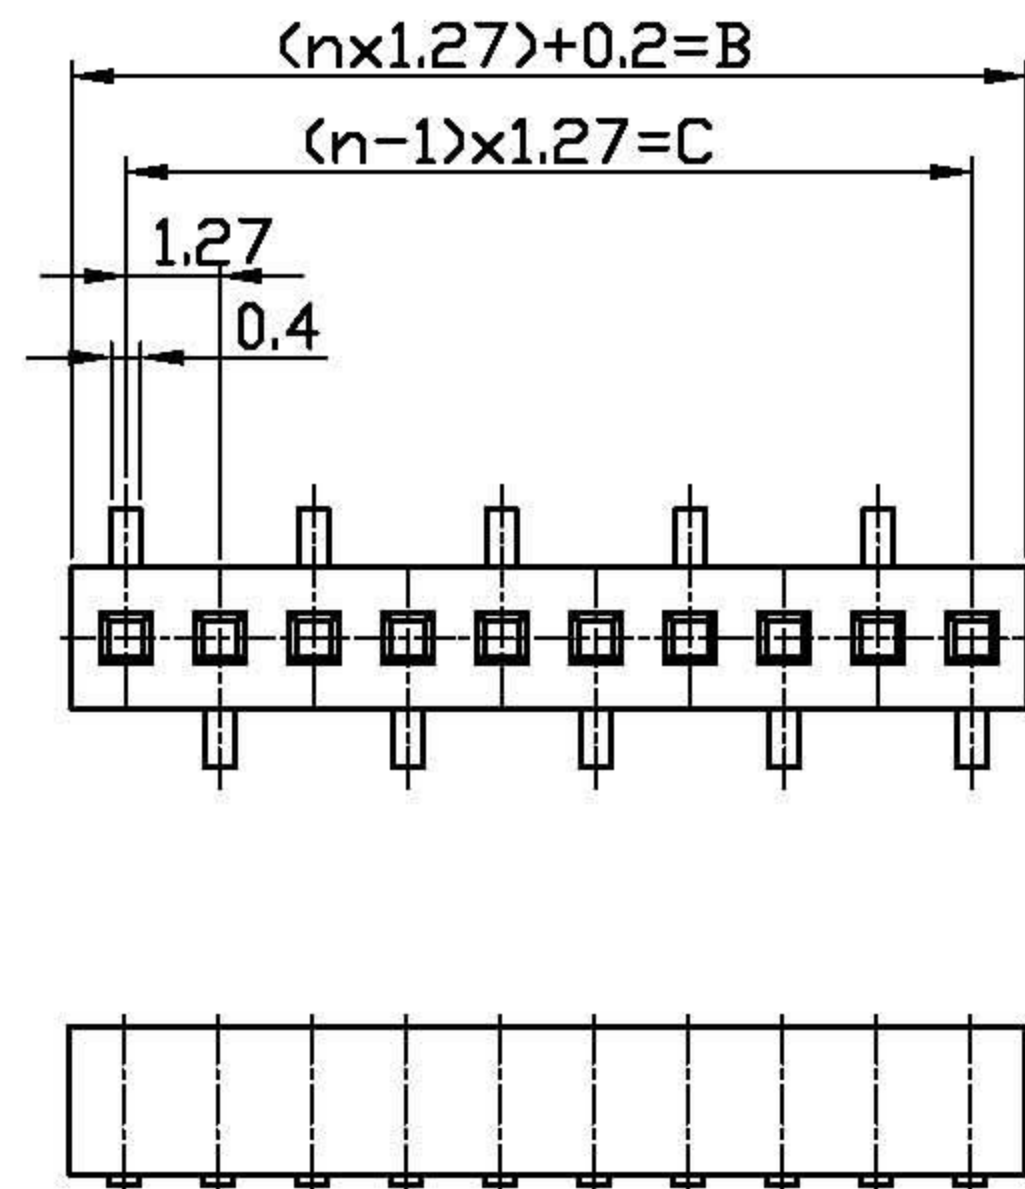

#### SPECIFICATION

- \* Current Rating:  
1 A
- \* Withstanding Voltage:  
500 VAC ( 1 min. )
- \* Insulation Resistance:  
1000 Megohms MIN.
- \* Contact Resistance:  
30 Milliohms MAX.
- \* Operating Temperature:  
-40°C to +85°C
- \* Retention Force:  
450g MIN.

#### ORDER INFORMATION

FA04 - 1 - XX - G1


Series Pin chart Plating All Gold  
No . of pos (02 ~ 40)

#### MATERIAL

- \* Contact: Phosphor Bronze
- \* Insulator: NYLON 46 + 30% G.F.
- \* Plating: All Gold

Pin Chart

Pin	A
1	
2	
3	
4	

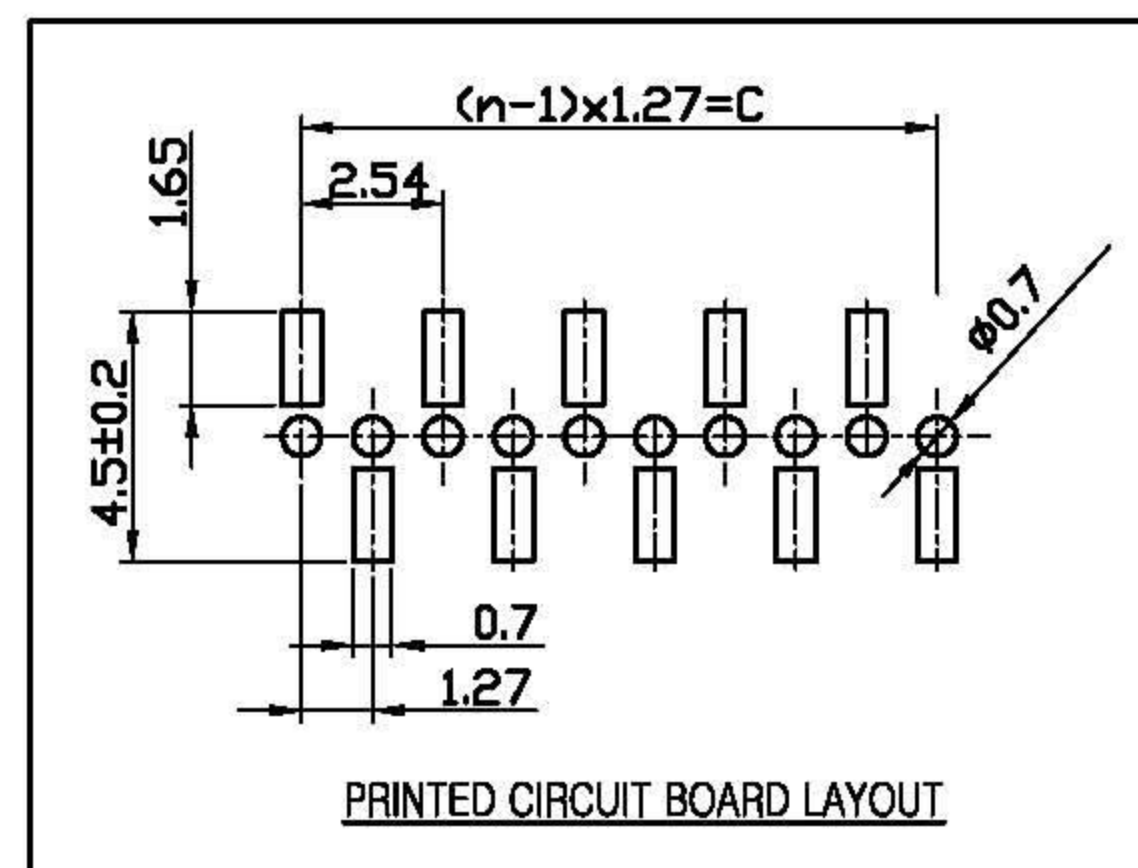

0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT: MM	1.27MM Female Header(H:2.2)	APP BY:
0.000±		SMD Single Row	CHK BY:
		MATL: NYLON 46 + 30% G.F.	DR BY:
		DWG NO: FA04	