



RQA TYPE DEMENSION

CEMENT FIXED RESISTORS

시멘트고정저항기

RQA TYPE DEMENSION

▶ 일반규격 | GENERAL SPECIFICATIONS

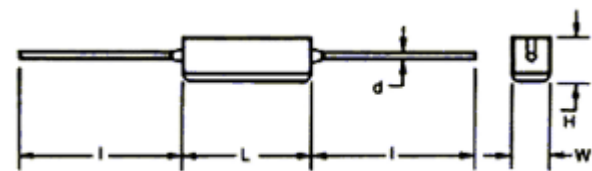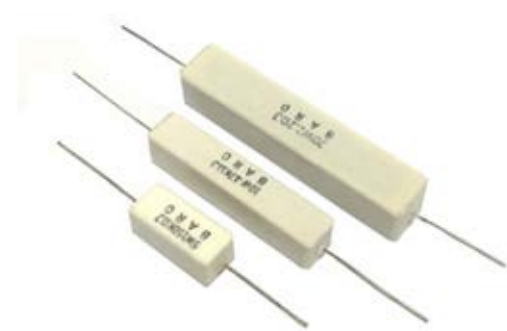

▶ 촌법 | DIMENSION

| 형명 Type | 정격전력 Rated Wattage | 저항치범위 Resistance Range | | | 촌 법 Dimensions [mm] | | | | |
|------------|--------------------------|---------------------------|-------------|--------------|---------------------|------|------|-------|--------|
| | | Glass core | MOR core | Ceramic core | L±1.5 | W±1 | H±1 | l±Min | d±0.02 |
| RQA 02 | 2W | 0.1 ~ 50Ω | 50.1~999kΩ | 0.1 ~ 8kΩ | 17.5 | 6.4 | 6.5 | 30 | 0.8 |
| RQA 03 | 3W | 0.1 ~ 150Ω | 150.1~999kΩ | 0.1 ~ 18kΩ | 22.0 | 8.0 | 8.0 | 30 | 0.8 |
| RQA 05 | 5W | 0.1 ~ 150Ω | 150.1~999kΩ | 0.1 ~ 18kΩ | 22.0 | 9.5 | 9.0 | 30 | 0.8 |
| RQA 07 | 7W | 0.1 ~ 200Ω | 200.1~999kΩ | 0.1 ~ 18kΩ | 35.0 | 9.5 | 9.0 | 30 | 0.8 |
| RQA 10 | 10W | 0.1 ~ 300Ω | 300.1~999kΩ | 0.1~36kΩ | 48.0 | 9.5 | 9.0 | 30 | 0.8 |
| RQA 15 | 15W | 0.1 ~ 300Ω | 300.1~999kΩ | 0.1~36kΩ | 48.0 | 12.5 | 12.5 | 30 | 0.8 |
| RQA 20 | 20W | 0.1 ~ 500Ω | 500.1~999kΩ | - | 63.5 | 12.5 | 12.5 | 30 | 0.8 |