



CEETUS ENTERPRISE CORPORATION

希得股份有限公司

## DC DRIVER BUCK01-DM SERIES

High Power Constant Current LED Driver Dimmable

Total Power ----- 20 Watts max

Input voltages ----- 5 ~ 30 VDC



MODEL : BUCK01-xxxxDM

MODEL NO.	DC INPUT Voltage (V)		OUTPUT (LED)			Efficiency Max %	Watts Max (W)
			Voltage (V)		Current (mA)		
	Min	Max	Min	Max	Typ		
BUCK01-350DM	5	30	1	Vin ~ 0.8	350 ± 7.5%	95	10
BUCK01-700DM	5	30	1	Vin ~ 0.8	700 ± 7.5%	95	20
BUCK01-1000DM	5	20	1	Vin ~ 0.8	1000 ± 7.5%	94	20
BUCK01-1200DM	5	15	1	Vin ~ 0.8	1200 ± 7.5%	94	18
BUCK01-1500DM	5	12	1	Vin ~ 0.8	1500 ± 7.5%	93	18

### SPECIAL FEATURES

- n Output short circuit protection
- n High efficiency reduce total power consumption
- n Tight regulated constant current output to maximize the LED performance
- n Wide range of input voltage from 5 ~ 30 VDC
- n Wide selection of pre-adjusted C/C outputs

### ENVIRONMENTAL



- n Operating temperature ----- - 40°C to + 65°C
- n Storage temperature ----- - 40°C to + 85°C
- n Humidity (Non - Condensing) ----- 5% to 95%
- n Cooling ----- Convection
- n Vibration Frequency ----- 5 to 50 HZ
- n MTBF ----- >100,000 Hours at full load and 25°C ambient conditions (MIL-217F)



CEETUS ENTERPRISE CORPORATION


希得股份有限公司

## DC DRIVER BUCK01-DM SERIES

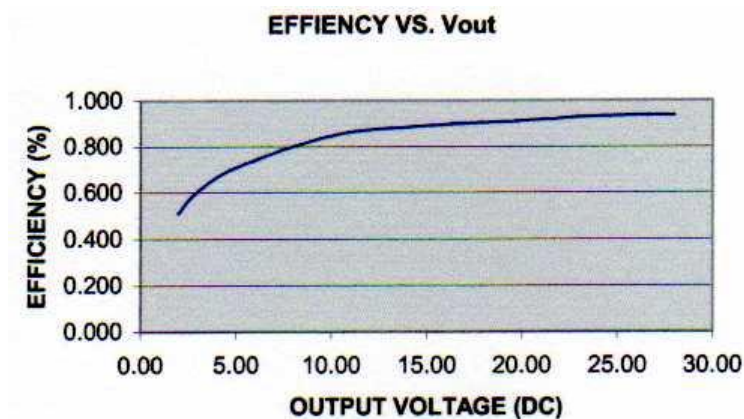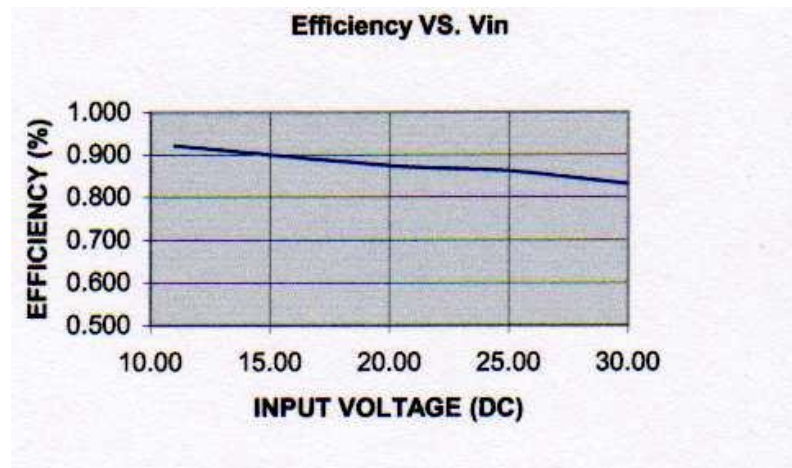

Dimension

(BOTTOM VIEW)

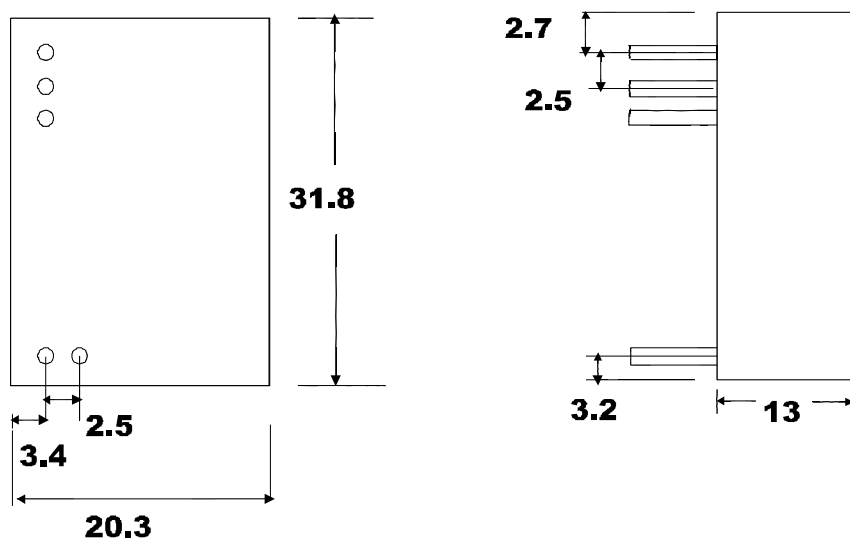

Note : 1. All dimensions are in millimeters.

2. All dimensions without tolerances are for reference only.