


成型尺寸	公差
X	±0.3
X.X	±0.2
X.XX	±0.1

REVISIONS			
REV	DESCRIPTION	DATE	BY

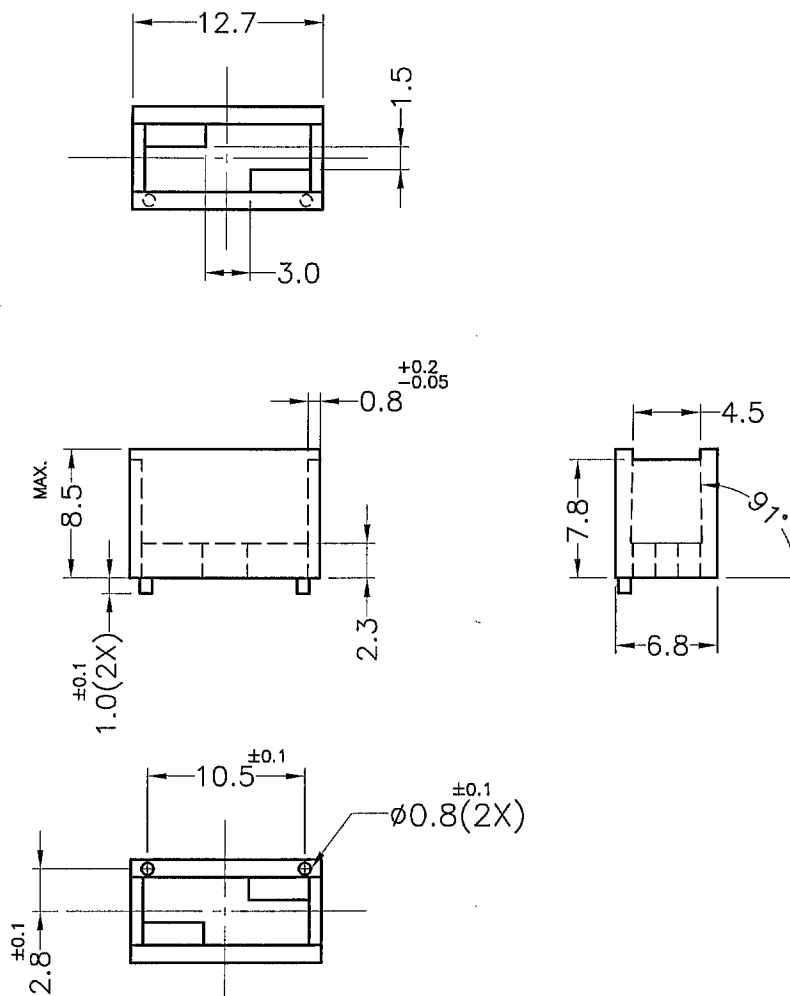

QMFZ2 Component - Plastics

Monday, January 24, 2005

E102861

TOSOH CORP POLYMERS DIV
SHIBA-KOEN 1ST BLDG 3-8-2 SHIBA MINATO-KU TOKYO 105-8623 JP

Material Designation: GS-40, GS-40R(c)

Product Description: Polyphenylene Sulfide (PPS), furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.38	V-0	-	-	130	130	130	-	-
	0.75	V-0	3	4	200	200	200	-	-
	1.5	V-0	1	-	220	200	220	-	-
	3.0	V-0	1	4	220	200	220	-	-

CTI: 4 IEC CTI: - HVTR: 0 D495: 2 IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): 22 Volume Resistivity (10⁹ohm-cm): 15 Dimensional Stability(%): 0
ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - ISO Heat Deflection (°C): -
ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Charpy Impact (kJ/m²): -

(c) Grades may have optional suffix.

Report Date: 8/4/1987

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN) CO., LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE	零件墊座	產品規格圖面
MATERIAL	PPS UL94V-0	DATE 2008.12.04
FINISH		DRAWN Tony
COLOR	BLACK	CHECK
UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED

PART NUMBER	DRAWING NUMBER
PH-26PPS	PH-26PPS
SIZE A4	SCALE 2:1
UNIT mm	REV B