
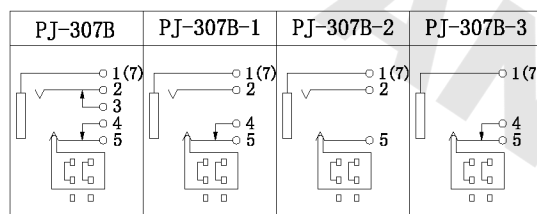


H	1.0	1.3
APPD.		



1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

10	CONTACT FOOT	6	H62 BRASS T=0.35	Ni底-Ag-Plating			
9	SWITCH COVER	1	PF				
8	SWITCH HOUSING	1	POM				
7	AXIS SUPPORT	1	H59 BRASS	Ni-Plating			
6	HOUSING	1	PBT				
5	5# CONTACT FOOT	1	SUS301 T=0.25	Ni底-Ag-Plating			
4	4# CONTACT FOOT	1	H62 BRASS T=0.4	Ni底-Ag-Plating			
3	3# CONTACT FOOT	1	H62 BRASS T=0.4	Ni底-Ag-Plating			
2	2# CONTACT FOOT	1	SUS301 T=0.2	Ni底-Ag-Plating			
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE T=0.2	Ni底-Sn-Plating			
NO.	DESCRIPTION	QTY	MATERIAL	PLATING			
UNIT: MM		TYPE:	MODEL NO:	PAPER NO: A4		PAGE 1 OF 1	
		PHONE JACK	PJ-307B	TOLERANCE	ANGLBS	SCALE	VER
				± 0.15	± 1.5°	3:1	1
DESIGNER BY:			Green Electronics CO.,LTD				
CHECK BY:							
APPROVED BY:							