

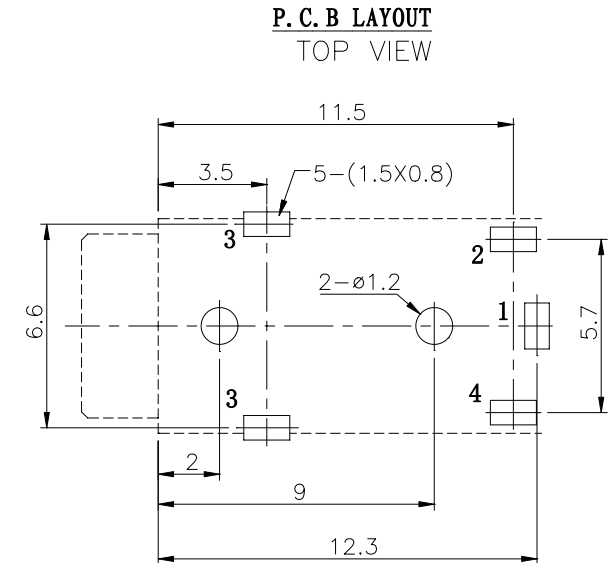
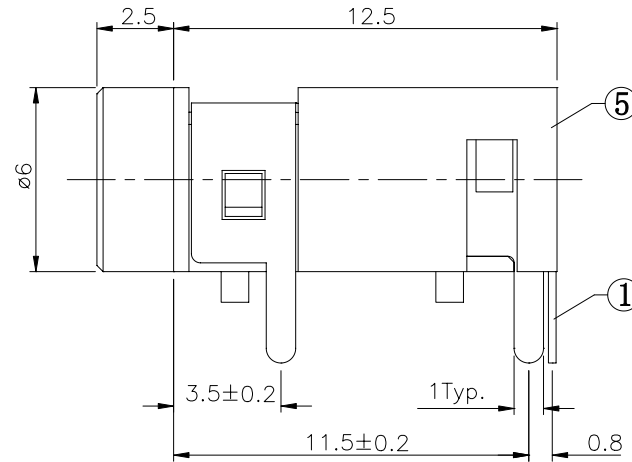


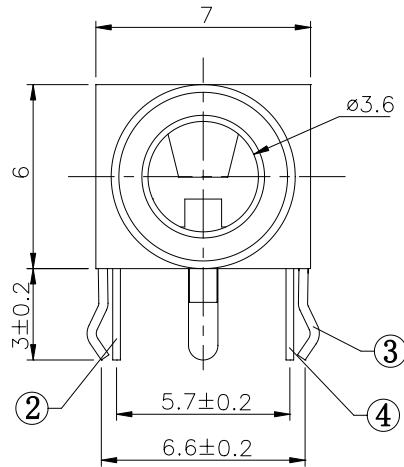


SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03\Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

5	HOUSING	1	PBT							
4	3#SPRING PIECE	1	PHOSPHOR BRONZE	Sn—Plating						
3	CONTACT FOOT	1	BRASS	Sn—Plating						
2	2#SPRING PIECE	1	PHOSPHOR BRONZE	Sn—Plating						
1	1#SPRING PIECE	1	PHOSPHOR BRONZE	Sn—Plating						
NO.	DESCRIPTION	QTY	MATERIAL	PLATING						
UNIT: MM		TYPE:		MODEL NO:		PAPER NO: A4		PAGE 1 OF 1		
		PHONE JACK		PJ-322		TOLERANCE		ANGLES	SCALE	VER
						0.15		1:5	4:1	1
DESIGNER BY:				 旭日佳电子有限公司 □ BEST SUN ELECTRONIC CO., LTD						
CHECK BY:										
APPROVED BY:										