



P. C. B LAYOUT  
TOP VIEW

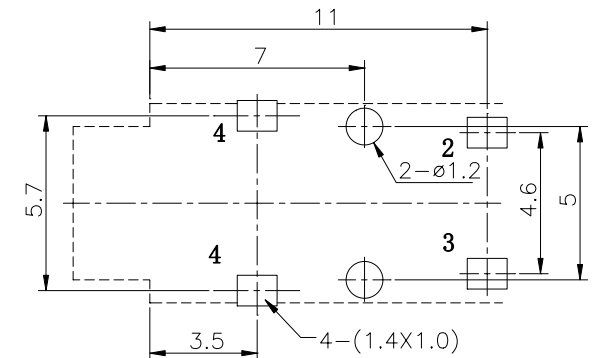

SCHEMATIC



SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance:  $\leq 0.03\Omega$ ;
3. Insulation resistance:  $\geq 100M\Omega$  (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-20N;
6. life test: 5,000 cycles.

4	3#CONTACT FOOT	1	BRASS	Ag-Plating
3	2#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	1#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PC/PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM		TYPE:		MODEL NO:
		PHONE JACK		PJ-321
				PAPER NO: A4
				PAGE 1 OF 1
				TOLERANCE
				ANGLES
				SCALE
				VER
				0.15
				1:5
				4:1
				1
DESIGNER BY:				
CHECK BY:				
APPROVED BY:				



旭日佳电子有限公司  
BEST SUN ELECTRONIC CO., LTD