


# Topstek Current Transducer TMF500A .. TMF3000A

## TMF 500A~3000A

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (16 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

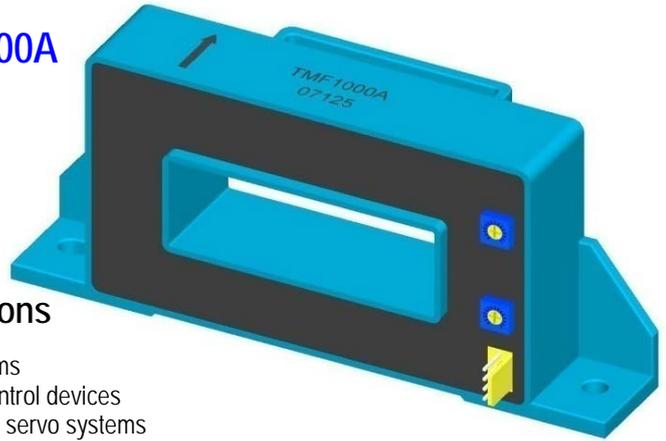

### Applications

- ◆ UPS systems
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Controller for traction equipment e.g. electric trains



### Specifications

Parameter	Symbol	Unit	TMF 500A	TMF 800A	TMF 1000A	TMF 1200A	TMF 1500A	TMF 2000A	TMF 2500A	TMF 3000A
Nominal Input Current	$I_{in}$	A DC	500	800	1000	1200	1500	2000	2500	3000
Linear Range	$I_{fs}$	A DC	±1500	±2400	±3000	±3600	±4500	±6000	±7000	±7500
Nominal Output Voltage	$V_{hn}$	V	4 V ±1% at $I_f = I_{in}$ ( $R_L = 10k\Omega$ )							
Offset Voltage	$V_{os}$	mV	Within ±15 mV @ $I_f = 0$ , $T_a = 25^\circ C$							
Output Resistance	$R_{OUT}$	$\Omega$	<100 $\Omega$							
Hysteresis Error	$V_{oh}$	mV	Within ±30 mV @ $I_f = I_{in} \rightarrow 0$							
Supply Voltage	$V_{CC}/V_{EE}$	V	±15V ±5%							
Linearity	$\rho$	%	Within ±1% of $I_{in}$							
Consumption Current	$I_{CC}$	mA	±16 mA nominal							
Response Time (90% $V_{hn}$ )	$T_r$	$\mu sec$	5 $\mu sec$ max. @ $d I_f / dt = I_{in} / \mu sec$							
Frequency bandwidth (-3dB)	$f_{BW}$	Hz	DC to 50kHz							
Thermal Drift of Output	-	%/ $^\circ C$	Within ±0.1 %/ $^\circ C$ @ $I_{in}$							
Thermal Drift of Zero Current Offset	-	mV/ $^\circ C$	Within ±1.5 mV/ $^\circ C$ @ $I_{in}$							
Dielectric Strength	-	V	AC2.5KV X 60 sec							
Isolation Resistance @ 1000 VDC	$R_{IS}$	M $\Omega$	>500 M $\Omega$							
Operating Temperature	$T_a$	$^\circ C$	-15 $^\circ C$ to 80 $^\circ C$							
Storage Temperature	$T_s$	$^\circ C$	-20 $^\circ C$ to 85 $^\circ C$							
Mass	W	g	470 g							

# Topstek Current Transducer TMF500A .. TMF3000A



## Appearance, dimensions and pin identification

All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted.

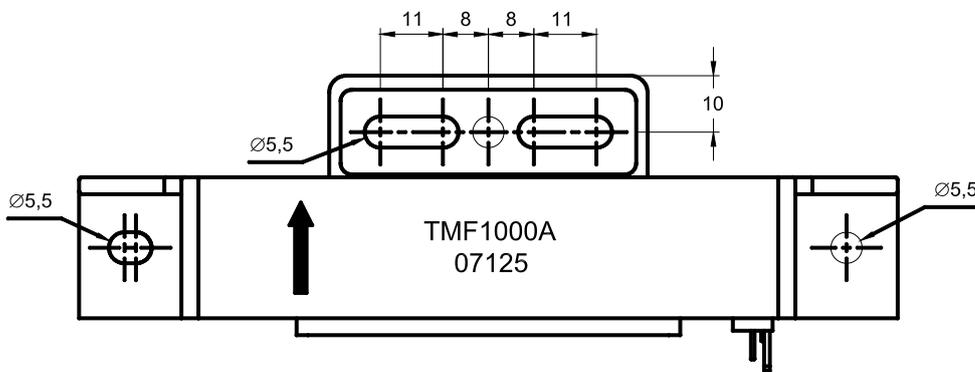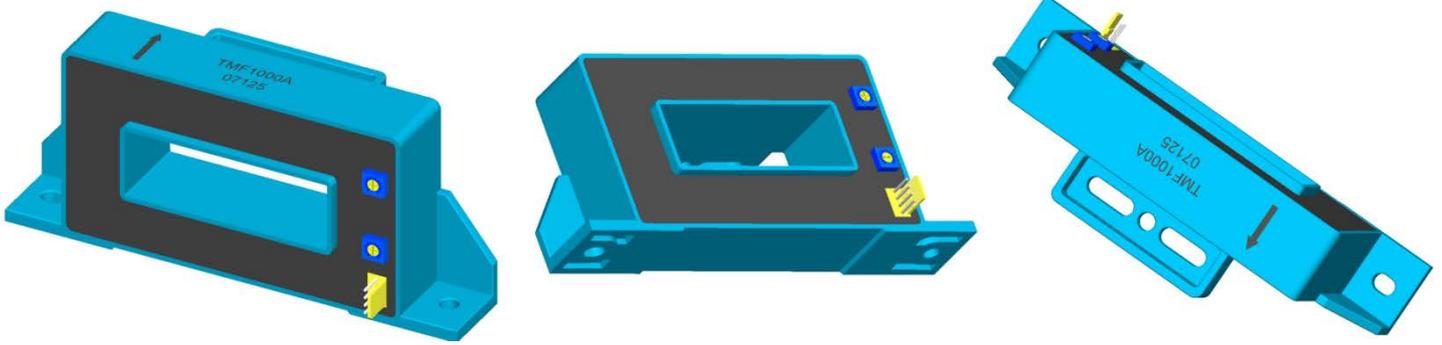

Pin Assignment	
1	+15V
2	-15V
3	V <sub>out</sub>
4	0V

→ Positive current flow direction

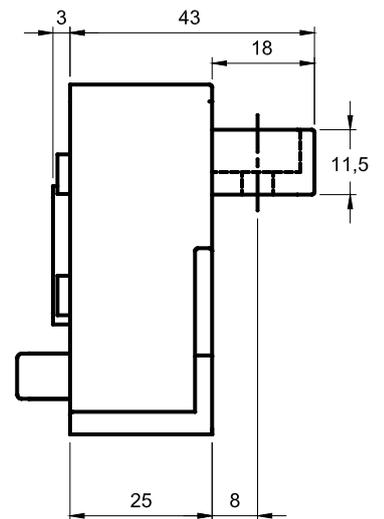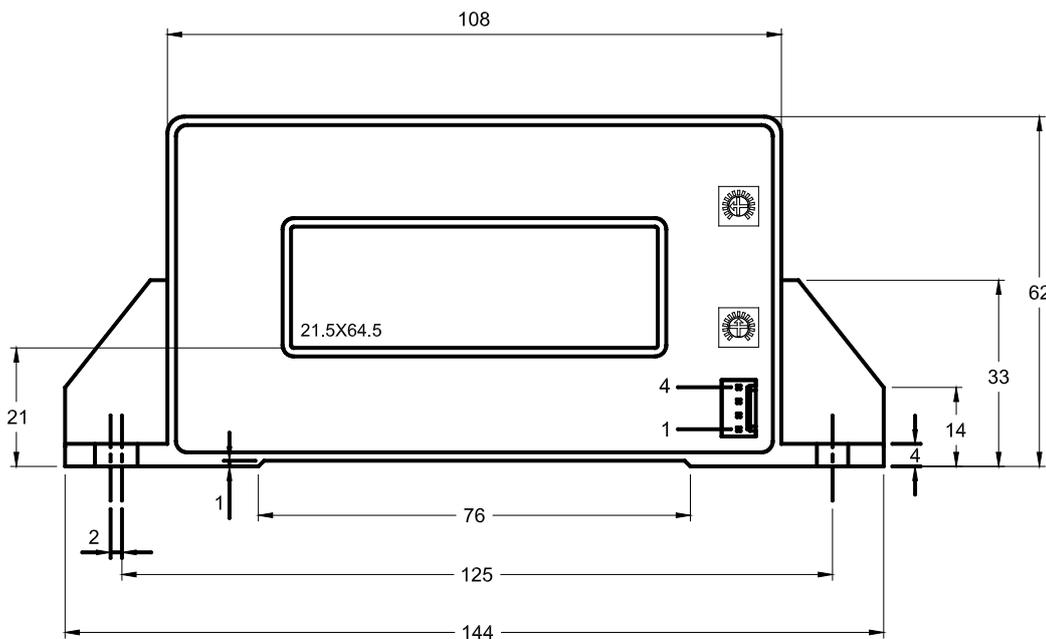



**Additional Information :**

**한국 대리점 : (주)디웰전자 (Diwell Electronics Co., Ltd.)**

**경기도 군포시 당정동 358 군포창업보육센터 202호**

**202, Kunpo Business Incubator Center, 358,**

**Dangjung-Dong, Gunpo-City, Gyeonggi-Do, South Korea**

**Phone : 070-8235-0820 (+82-70-8235-0820)**

**Fax : 031-429-0821 (+82-31-429-0821)**

**기술 및 구매 문의 email : [expoeb2@diwell.com](mailto:expoeb2@diwell.com),**

**[dsjeong@diwell.com](mailto:dsjeong@diwell.com)**