


Type		Component Size (mm)			Carrier Tape	Quantity/Reel (Pieces)	Taping (mm)					Reel Size
		L	W	T			A	B	W	P1	T1	
RK73B RK73H RK73-RT RK73G RK73A RK73Z SG73 SR73 RF73 UR73 RN73 LT73 HV73 RN73H SG73P SG73S SG73-RT LT73V	1F	0.4	0.2	0.12	TX	40000	0.25±0.04	0.45±0.04	4.0±0.2	1.0±0.05	0.40±0.1	180
	1H	0.6	0.3	0.23	TBL	20000	0.25±0.03	0.45±0.03	8.0±0.2	2±0.05	0.31±0.2/-0	178
	1E	1	0.5		TA	35000	0.67±0.05	0.37±0.05	8.0±0.2	1±0.05	0.42±0.1	178
	1J	1.6	0.8	0.45	TC/TCM	10000/15000	0.67±0.05	0.37±0.05	8.0±0.2	2±0.05	0.42±0.1	178
	1J	1.6	0.8		TPL*	20000	1.15±0.1	0.65±0.1	8.0±0.2	2±0.05	0.42±0.2/-0	178
	1J	1.6	0.8		TP	10000	1.15±0.1	0.65±0.1	8.0±0.2	2±0.05	0.42±0.2/-0	178
	2A	2	1.25	0.5	TP	10000	1.9±0.1	1.1±0.1	8.0±0.2	2±0.05	0.6±0.2/-0	178
	2A	2	1.25		TD	5000	1.9±0.1	1.1±0.08	8.0±0.2	4.0±0.1	0.6±0.2/-0	178
	2A	2	1.25		TE	4000	2.4±0.2	1.6±0.2	8.0±0.2	4.0±0.1	0.9±0.1	178
	2A	2	1.25		TDD	10000	2.4±0.1	1.65±0.1	8.0±0.2	4.0±0.1	0.75±0.2/-0	255
	2A	2	1.25		TED	10000	2.4±0.2	1.45±0.15	8.0±0.2	4.0±0.1	0.65±0.1	255
	2B	3.2	1.6	0.6	TD	5000	3.5±0.2	2±0.2	8.0±0.2	4.0±0.1	0.75±0.2/-0	178
	2B	3.2	1.6		TE	4000	3.5±0.2	1.9±0.2	8.0±0.2	4.0±0.1	1.0±0.1	178
	2B	3.2	1.6		TDD	10000	3.5±0.1	1.9±0.1	8.0±0.2	4.0±0.1	0.75±0.2/-0	255
	2B	3.2	1.6		TED	10000	3.5±0.1	1.9±0.2	8.0±0.2	4.0±0.1	1.0±0.1	255
	2E	3.2	2.6	0.6	TD	5000	3.5±0.2	2.85±0.2	8.0±0.2	4.0±0.1	0.75±0.2/-0	178
	2E	3.2	2.6		TE	4000	3.5±0.2	2.85±0.2	8.0±0.2	4.0±0.1	1.0±0.15	178
	2E	3.2	2.6		TDD	10000	3.5±0.1	2.8±0.1	8.0±0.2	4.0±0.1	0.75±0.2/-0	255
	2E	3.2	2.6		TED	10000	3.6±0.15	2.9±0.15	8.0±0.2	4.0±0.1	1.0±0.1	255
	2H/W2H	5	2.5	0.6	TE	4000	5.35±0.2	2.9±0.2	12.0±0.1	4.0±0.1	1.0±0.15	178
	2H/W2H	5	2.5		TED	10000	5.4±0.2	2.9±0.2	12.0±0.1	4.0±0.1	0.85±0.1	255
	3A/W3A	6.3	3.1	0.6	TE	4000	6.65±0.2	3.44±0.2	12.0±0.1	4.0±0.1	1.0±0.15	178
	3A/W3A	6.3	3.1	0.6	TED	10000	6.9±0.2	3.6±0.2	12.0±0.1	4.0±0.1	0.85±0.1	255
WK73	2B	1.6	3.2	0.6	TD	5000	3.5±0.2	2.0±0.2	8.0±0.2	4.0±0.1	0.75±0.2/-0	178
	2H	2.5	5.0	0.4	TE	4000	5.35±0.5	2.9±0.2	12.0±0.3	4.0±0.1	1±0.15	178
	2J	3.1	4.6	0.4	TE	4000	4.85±0.2	3.35±0.2	12.0±0.3	4.0±0.1	1±0.15	178
	3A	3.1	6.4	0.45	TE	4000	6.65±0.2	3.44±0.2	12.0±0.3	4.0±0.1	1±0.15	178
CND-K	1J10K	3.2	1.6	0.5	TD	5000	2.0±0.1	3.5±0.1	8.0	4.0	0.6±0.2/-0	178
CND	2B10	6.40	3.1	0.6	TE	4000	6.6±0.2	3.4±0.2	12.0±0.1	4.0±0.1	1±0.15	178
CND	1J10	3.20	1.6	0.55	TD	5000	3.5±0.1	2.0±0.1	8.0±0.2	4.0±0.1	0.75±0.2/-0	178
CND	2A10	4.00	2.1	0.6	TE	4000	4.45±0.2	2.5±0.2	12.0±0.1	4.0±0.1	1±0.15	178
CNB	2B5Z	3.2	2.5	0.6	TE	4000	3.5±0.2	3.0±0.2	8.0±0.2	4.0±0.1	1±0.15	178
CNB	2E9Z	6.40	3.2		TE	4000	6.7±0.2	3.5±0.2	12.0±0.1	4.0±0.1	1±0.15	178
CN	1H2N	0.8	0.6	0.35	TD	10000	0.9±0.05	0.7±0.05	8.0±0.2	2.0±0.05	0.45±0.1	178
CN A	1H4N	1.4	0.6	0.35	TD	10000	1.6±0.05	0.75±0.05	8.0±0.2	2.0±0.05	0.45±0.1	178
CN K/N	1F8K	3.8±0.1	1.6±0.2	0.44±0.1	TD	5000	4.05±0.1	1.85±0.1	8.0±0.2	4.0±0.05	0.6±0.1	178
CNZ	1E2/1E2K	1			TD	10000	1.2±0.1	1.2±0.1	8.0±0.2	2.0±0.05	0.45±0.1	178
CNN	1E4			1	TD	10000	2.27±0.1	1.27±0.1	8.02±0.2	2.0±0.6	0.7±0.1	178
	1E4K	2			TD	10000	2.2±0.1	1.2±0.1	8.02±0.2	2.0±0.6	0.45±0.1	178



* TPL not available for RN73 and RN73H

Bulk Case (RK73 1E, 1J, 2A, 2B) Packaging Designation: BK

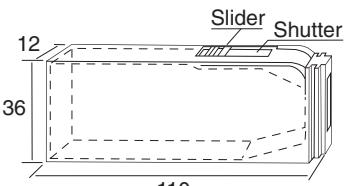

Style	Packaging Quantity
1E	50,000 pieces/case
1J	25,000 pieces/case
2A	10,000 pieces/case
2B	5,000 pieces/case

Packaging specifications

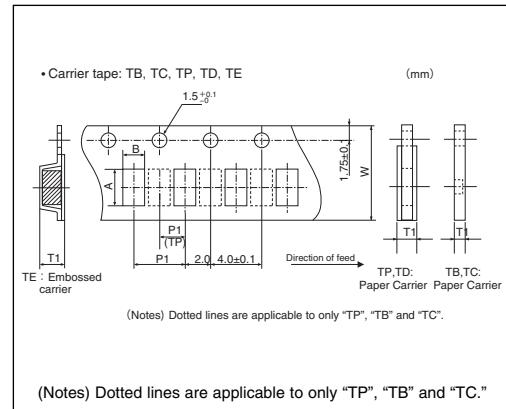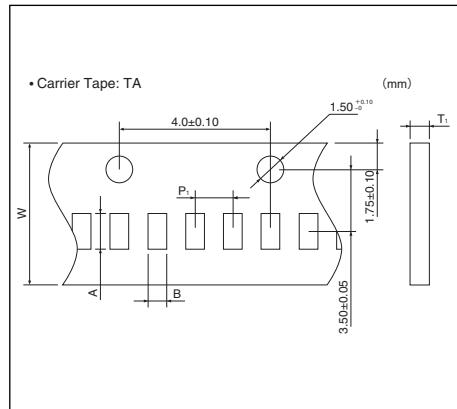

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/17/11

packaging - surface mount components

Type		Component Size (mm)			Carrier Tape	Quantity/Reel (Pieces)	Taping (mm)					Reel Size			
		L	W	T			A	B	W	P1	T1				
CN CN_A CN_K/N CNZ CNN	1J2/1J2K	1.60	1.6	0.6/0.5	TD	5000	1.9±0.1	1.9±0.1	8.0±0.2	4.0±0.1	0.6+0.2/-0 0.75+0.2/-0/	178			
					TDD	10000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.6+0.2/-0 0.75+0.2/-0/	255			
	1J4/1J4K,A	3.20		0.6/0.5	TD	5000	3.5±0.1	2.0±0.1	8.0±0.2	4.0±0.1	0.75+0.2/-0/ 0.6+0.2/-0/	178			
					TDD	10000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.75+0.2/-0/ 0.6+0.2/-0/	255			
	1J8	6.40		0.6	TE	4000	6.9±0.2	2.0±0.2	12.0±0.1	4.0±0.1	0.9±0.1	178			
					TED	10000	6.9±0.2	2.0±0.2	12.0±0.1	4.0±0.1	0.9±0.1	255			
	2A2	2.54		2	TE	4000	2.9±0.2	2.4±0.2	8.0±0.2	4.0±0.1	1±0.15	178			
					TED	10000	2.9±0.2	2.4±0.2	8.0±0.2	4.0±0.1	1±0.15	255			
	2A4	5.08			TE	4000	5.4±0.2	2.3±0.2	12.0±0.1	4.0±0.1	1±0.15	178			
					TED	10000	5.4±0.2	2.3±0.2	12.0±0.1	4.0±0.1	1±0.15	255			
	2A8	10.16			TE	4000	10.6±0.2	2.45±0.2	16	4.0±0.1	1±0.15	178			
					TED	10000	10.6±0.2	2.45±0.2	16	4.0±0.1	1±0.15	255			
	2B2	2.54	3.2		TE	4000	3.5±0.2	2.85±0.2	8.0±0.2	4.0±0.1	1±0.15	178			
					TED	10000	3.5±0.2	2.85±0.2	8.0±0.2	4.0±0.1	1±0.15	255			
	2B4	5.08			TE	4000	5.4±0.2	3.4±0.2	12.0±0.1	4.0±0.1	1±0.15	178			
					TED	10000	5.4±0.2	3.4±0.2	12.0±0.1	4.0±0.1	1±0.15	255			
	2B4A	5.10	3.1	0.55	TE	4000	3.4±0.2	5.4±0.2	12	4	1±0.15	178			
					TE	2000	10.55±0.2	3.6±0.2	16	4.0±0.1	1±0.15	178			
	2B8	10.16		0.6	TE	5000	10.55±0.2	3.6±0.2	16	4.0±0.1	1±0.15	255			
					TED	5000	10.55±0.2	3.6±0.2	16	4.0±0.1	1±0.15	255			
RD41	2A, 10	2	1.25	-	TE	3000	1.5±0.2	2.3±0.2	8.0±0.2	4.0±0.1	1.3±0.2	178			
RN41	2ES, 12M	3.5	1.4	-	TE	3000	1.7±0.2	3.7±0.2	8.0±0.2	4.0±0.1	1.8±0.2	178			
RM41	2D, 20	3.2	1.55	-	TE	2000	1.7±0.2	3.7±0.2	8.0±0.2	4.0±0.1	1.8±0.2	178			
MLT, CC	2E, 2H, 25	5.9	2.2	-	TE	1500	2.4±0.2	6.2±0.2	12.0±0.1	4.0±0.1	2.7±0.2	178			
NT73	1E	1	0.5	0.35	TP	10000	1.15±0.1	0.65±0.1	8.0±0.2	2.0±0.05	0.45+0.1/-0	178			
LA73	1J	1.6	0.8	0.45	TD	5000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.6+0.2/-0	178			
LT73	2A	2	1.25	0.5	TD	5000	2.4±0.2	1.65±0.2	8.0±0.2	4.0±0.1	0.75+0.2/-0	178			
PT72	2A	2	1.25	1	TE	3000	2.25±0.1	1.45±0.1	8.0±0.2	4.0±0.1	1.5±0.15	178			
	2B	3.2	1.6		TE	3000	3.5±0.2	1.9±0.2	8.0±0.2	4.0±0.1	1.5±0.15	178			
SDT73H	2B	3.2	1.6	0.5	TEK/TE	1000/5000	3.6±0.1	2.0±0.1	8.0±0.2	4.0±0.1	0.85+0.05/-0.1	178			
LP73	1J	1.6	0.8	0.5	TE	5000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.6±0.1	178			
	2A	2.0	1.25	0.5	TE	5000	2.4±0.1	1.6±0.1	8.0±0.2	4.0±0.1	0.85±0.1	178			
	2B	3.2	1.6	0.5	TE	5000	3.6±0.1	2.0±0.2	8.0±0.2	4.0±0.1	0.85±0.1	178			
RCU	1.60		0.8	1.15	TE	2000	1.85±0.16	1.05±0.15	8.0±0.2	4.0±0.1	1.25±0.1	178			
RCT	2.00		1.25	1.45	TED	5000	1.85±0.16	1.05±0.15	8.0±0.2	4.0±0.1	1.25±0.1	260			
RCS	3.20		1.6	1.25	TE	2000	2.45±0.15	1.65±0.1/-0.2	8.0±0.2	4.0±0.1	1.70±0.1	178			
RCW	3.2		1.6	2	TE	2000	3.4±0.1/-0.05	1.95±0.1/-0.05	8.0±0.2	4.0±0.1	2.2±0.01	178			
KL32	3.2		2.5	2.2	TE	2000	3.55±0.1	2.70±0.1	8.0±0.1	4.0±0.1	2.7±0.5	178			
KL73	1E	1	0.5	0.35	TP	10000	1.15±0.1	0.65±0.1	8.0±0.2	2.0±0.05	0.45±0.2	178			
	1J	1.6	0.8	0.5	TE	4000	1.9±0.1	1.1±0.1	8.0±0.2	4.0±0.1	0.9±0.15	178			
	2A	2	1.25	0.5	TE	4000	2.4±0.2	1.6±0.2	8.0±0.2	4.0±0.1	1.0±0.15	178			
	2B	3.2	1.6	10.6	TE	4000	3.5±0.2	1.9±0.2	8.0±0.2	4.0±0.1	1.0±0.15	178			
KQC	0603	1.6	1.05	0.7	TE	2000	1.20±0.05	1.77±0.05	8	4	0.86±0.05	178			
KQT	0402	1.0	0.5	0.55	TD	2000	0.65±0.05	1.20±0.05	8	4	0.68±0.1	178			
KQC					TP	10000	0.65±0.05	1.20±0.05	8	2	0.68±0.1	178			
KQ	0603	1.60	1.0	0.9	TE	2000	1.15±0.05	1.86±0.05	8	4	1.05±0.1	178			
	0805	2.00	1.5	1.3	TE	2000	1.60±0.1	2.22±0.1	8	4	1.5±0.1	178			
	1008	2.50	2.2	1.8	TE	2000	2.35±0.1	2.7±0.1	8	4	2.1±0.1	178			
LPC	4545	4.6	4.1	4.6	TE	2500	4.85±0.2	4.25±0.2	12	8	5.1±0.2	380			
	4045	4.50	4	4.5	TE	1000	4.15±0.2	4.75±0.2	12.0±0.1	8.0±0.2	5±0.2	380			
	4235	4.5	4.2	3.5	TM	2000	4.4±0.2	4.75±0.2	12.0±0.1	8.0±0.1	4.0±0.2	330			
	9040N/E	9.00	10.2	4.9	TE	500	09.4±0.2	16.0±0.1	12.0±0.1	7.5±0.2	380				
	12065	12.40	12	7.5	TE	300	12.5±0.2	13±0.2	24±0.1	16±0.2	8.2±0.2	380			
LCM	10065	10.40	10	7.5	TE	300	11±0.2	11.5±0.2	24±0.1	16±0.2	8.2±0.2	380			
	1060	10	10.1	6.15	TEG	500	10.5±0.1	10.6±0.1	24±0.3/-0.1	16±0.1	6.8±0.1	380			
SDR	0604	5.6	—	4.5	TE	1500	—	—	12	4.0±0.1	5.0	330			
	0805	7.8	—	5.3	TE	1000	—	—	—	12.0	6.2	380			
	1006	9.8	—	5.8	TE	800	—	—	—	12.0	6.7	380			
SL	0.7	5.0	0.5	1.7	TE	2000	5.5±0.1	3.1±0.1	12	4	2.25±0.10	180			
	1	6.3	3.1	1.9	TE	1000	6.8±0.1	3.6±0.1	12.0±0.1	8.0±0.2	2.35±0.1	180			
	2/3	11.5	7	2.5	TE	1000	12.2±0.1	7.7±0.1	24	12.0±0.1	3.1±0.1	255			
SLN	2	11.5	7	2.5	TE	1000	12.2±0.1	7.7±0.1	24	12±0.2	3.1±0.1	225			
	2A	2.0	1.25	0.25	TD	5000	1.65±0.1	2.4±0.1	8	4	0.42±0.03	178			
	2H	5.0	2.5	0.5	TE	4000	2.9±0.2	5.35±0.20	12	4	1.0±0.15	178			
TLRH	3AW	6.3	3.2	0.5	TE	2000	3.55±0.10	6.75±0.10	12	8	1.0±0.1	178			

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.



11/17/13

packaging - surface mount components

Type	Component Size (mm)			Carrier Tape	Quantity/ Reel (Pieces)	Taping (mm)					Reel Size	
	L	W	T			A	B	W	P1	T1		
TLR	1E	1.0	0.5	0.25	TP	10000	0.65±0.05	1.15±0.05	8	2	0.40±0.1	178
	2A	2.0	1.25	0.25	TD	5000	1.65±0.1	2.4±0.1	8	4	0.42±0.02/-0	178
	3A, 3AW	6.4	3.2	0.6	TE	2000	6.75±0.2	3.55±0.1	12.0±0.1	8.0±0.2	1.0±0.1	180
	2B, 2BN	3.2	1.6	0.6	TD	5000	3.5±0.2	2.0±0.2	8.0±0.2	4.0±0.1	0.75±0.2/-0	180
PS	2H	5.0	2.5	0.6	TE	4000	5.35±0.2	2.9±0.1	12.0±0.1	4.0±0.1	1.0±0.15	180
	B	10.0	8.4	0.65	TEB	4000	10.4±0.1	8.8±0.1	24	12	1.0±0.1	329
	B (0.2mΩ)	10.0	8.4	1.1	TEB	3000	8.8±0.1	10.4±0.1	24	12	1.5±0.1	329
	I (3m/4mΩ)	10.0	5.2	0.7	TEB	3000	10.4±0.1	5.6±0.1	24	8	1.1±0.1	329
TSL	E	6.4	6.4	0.65	TE	2000	6.8±0.1	6.8±0.1	12	8	1.0±0.1	178
	1	6.3	3.1	1	TE	3000	6.6±0.1	3.4±0.1	12.0±0.1	4.0±0.1	1.3±0.1	180
NPR	1	7.5	4.5	2	TE	1000	7.9±0.1	4.8±0.1	16	8.0±0.2	2.45±0.1	178
	2	12	8	4	TE	1000	13.0±1	9±0.1	24	102	4.35±0.1	330
CSR	1	10.8	6.2	2.1	TE	1000	11.1±0.14	6.7±0.1	24	12.0±0.1	2.6±0.1	255
	2	12.8±0.5	8.2±0.3	3.1±0.2	TE	1000	13.0±0.1	9.0±0.15	24	12.0±0.1	4.35±0.1	330
CZB CZP	1E	1.0±0.1	0.5±0.1	0.5±0.1	TP	10000	1.17±0.1	0.65±0.1	8.0±0.22	2.0±0.23	0.63±0.1	178
	1J	1.6±0.15	0.8±0.15	0.8±0.15	TD	4000	1.8±0.1	1.1±0.1	8.1±0.1	4.0±0.1	1.1±0.1	178
	2A	2.0±0.2	1.25±0.2	0.9±0.2	TD	2000/4000*	2.4±0.1	1.6±0.1	8.1±0.1	4.0±0.1	1.2±0.1	178
	2B	3.2±0.2	1.6±0.2	0.51±0.25	TE	3000	3.5±0.1	1.8±0.1	8.1±0.1	4.0±0.1	1.8±0.1	178
MHL	1E	1.0±0.1	0.5±0.1	0.5±0.1	TP	10000	1.17±0.1	0.67±0.1	8.0±0.22	2.0±0.23	0.63±0.1	178
	1J	1.6±0.15	0.8±0.15	0.8±0.15	TD	4000	1.85±0.1	1.15±0.1	8.0±0.1	4.0±0.1	1.1±0.1	178
NV73 NV73DL	1H	0.6	0.3	0.3	TBM	15000	0.68±0.02	0.38±0.02	8.0±0.2	2.0±0.1	0.42±0.02/-0	180
	1E	1.0±0.1	0.5±0.1	0.25±0.15	TP	10000	1.15±0.1	0.65±0.1	8.0±0.2	2.0±0.1	0.6±0.2	180
	1J	1.6±0.15	0.8±0.15	0.8±0.15	TE	2500	1.9±0.1	1.2±0.1	8.0±0.2	4.0±0.1	1.75 max.	180
	2A	2.0±0.2	1.25±0.2	1.3 max.	TE	2500	2.4±0.1	1.6±0.1	8.0±0.2	4.0±0.1	1.75 max.	180
	2B	3.2±0.2	1.6±0.2	1.65 max.	TE	2500	3.6±0.1	2.0±0.1	8.0±0.2	4.0±0.1	1.75 max.	180
	2E	3.2	2.5	1.5 max.	TE	2000	3.5±0.1	2.85±0.1	8.0±0.2	4.0±0.2	1.55 max.	180
	2J	4.5	3.2	2.0 max.	TE	1000	4.9±0.1	3.6±0.1	12.0±0.2	8.0±0.2	2.05 max.	180
	2L	5.7	5.0	2.5 max.	TE	1000	6.0±0.1	5.4±0.1	12.0±0.2	8.0±0.2	2.60 max.	180
NV73DS	2L	6.1	5.1	3.0 max.	TE	800	5.3±0.1	6.6±0.1	12	8	3.00 max.	180
LR72	A	10±0.2	5.2	2	TE	2000	1.45±0.2	5.7±0.2	24±0.2	8.0±0.10	2.3±0.2	255
	B	10±0.2	3	2	TE	2000	1.45±0.2	3.4±0.2	24±0.2	8.0±0.10	2.5±0.2	255
	C	11.2±0.4	3.2±0.4	3.5±0.4	TE	1500	1.17±0.1	4.3±0.1	24±0.2	8.0±0.1	4.4±0.15	330
TF	10	1.00	0.5	0.45	TB	10000	1.15±0.05	0.65±0.05	8.0±0.2	2.0±0.1	0.6±0.2/-0	178
	16	1.60	0.8	0.6	TD	5000	1.9±0.1	1.1±0.1	8.0±0.3	4.0±0.1	0.6±0.1	180
CCP	2B	1.6	1.2	TE	3000	3.5±0.1	1.9±0.1	8.0±0.3	4.0±0.1	1.5±0.1	178	
	2E	3.20	2.5	2.2	TE	2000	3.5±0.1	2.8±0.1	8.0±0.3	4.0±0.1	2.4±0.1	178
CCF	1N,1F	6.0	2.5	2.5	TE	1000	6.4±0.2	2.7±0.2	12.0±0.3	4.0±0.1	2.9±0.2	178
MRGF16	-	11	7.7	2.2	TE	2000	11.7±0.2	8.2±0.2	24	12	2.4±0.1	330
BR	27A	9.0	3.0	1.15	TEB	4000	9.3±0.1	4.3±0.1	24.0±0.3	8.0±0.1	1.8±0.2	330
	36S	9.0	4.0	1.15	TEB	4000	9.3±0.1	3.3±0.1	24.0±0.3	8.0±0.1	1.8±0.2	330
LKS	45	4.5	3.2	0.5	TE	2000	5.0±0.1	3.6±0.1	12	8	1.06±0.1	178
	0745	7.5	7.5	4.5	TEG	1000	8.1±0.1	8.1±0.1	24±0.3	16±0.1	4.8±0.1	380
	1045	10.1	10.1	4.5	TEG	1000	10.7±0.1	10.7±0.1	24±0.3	16±0.1	4.8±0.1	380
	1260	12.5	12.5	6.0	TEG	700	13.1±0.1	13.1±0.1	24±0.3	16±0.1	6.1±0.1	380
KT	11835	11.8	3.6	3.0 max.	TEG	2500	4.1±0.2	12.1±0.1	24±0.3	8	3.2±0.1	380
KTZ	1030	10	10.1	3	TEG	1000	10.4±0.1	10.4±0.1	24±0.3	16±0.1	4.0±0.2	380
DNA DN(X) RD(X) R(X)A RT(X)	Q16	4.9	5.99	1.6	TE	2500	5.3±0.1	6.5±0.1	12	8	2.5±0.2	330
	Q20	8.66	5.99	1.6	TE	2500	9.0±0.1	6.5±0.1	16	8	2.5±0.2	330
	Q24	8.66	5.99	1.6	TE	2500	9.0±0.1	6.5±0.1	16	8	2.5±0.2	330
	Q28	10.0	5.99	1.6	TE	2500	3.5±0.1	6.5±0.1	16	8	2.5±0.2	330
	N08	4.83	5.99	1.6	TE	2500	5.3±0.1	6.5±0.1	12	8	2.5±0.2	330
	N14	8.66	5.99	1.6	TE	2500	9.0±0.1	6.5±0.1	16	8	2.5±0.2	330
	N16	9.91	5.99	1.6	TE	2500	10.3±0.1	6.5±0.1	16	8	2.5±0.2	330
	S03	2.92	2.30	0.95	TE	3000	2.77±0.1	3.15±0.1	8	4	1.3±0.2	180

* CZB2A: <2200Ω=TD:4,000; 2200Ω=TD: 2,000 pcs/reel

Packaging specifications

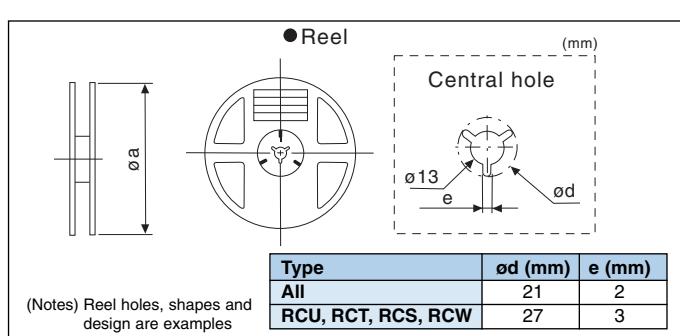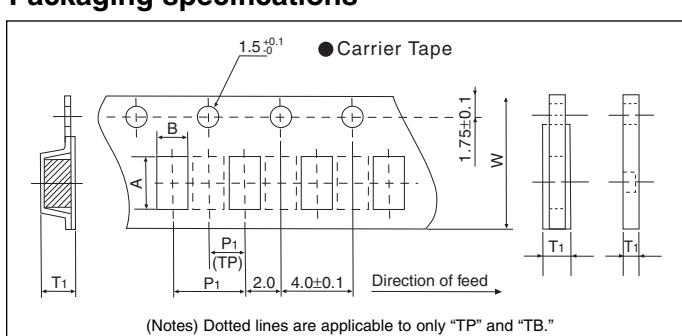

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/17/13