

Chip Trimmer Potentiometers

チップ半固定ポテンシヨメータ

FEATURES

- Space Saving Size
- Easily adjusts with standard screwdriver.
- Metal-glaze resistance element gives excellent stability and protection against environmental factors.
- Can be mounted to a circuit board with adhesive.
- Designed for reflow soldering.
- Supplied in 8mm tape for automatic assembly equipment.
- Conform RoHS

APPLICATIONS

CAMERA built-in VCR, 8mm VCR, VCR camera, still camera, headphone stereos, LCD television, disk drive, bar code equipments, radar detectors, hand held equipments.

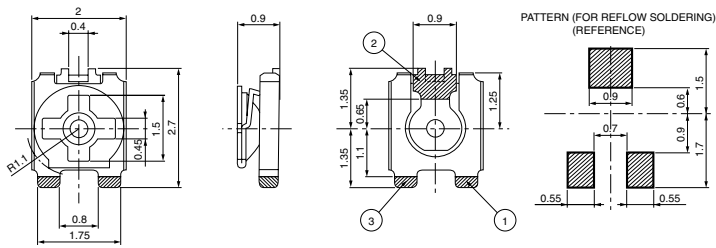
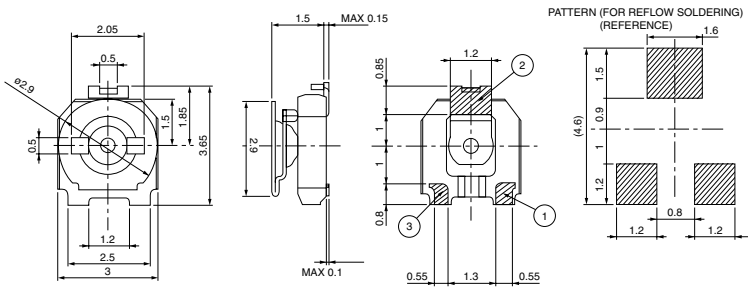
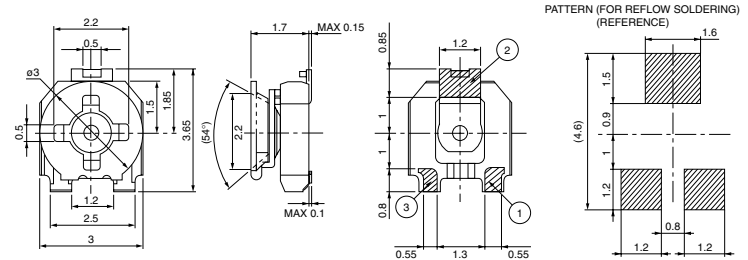
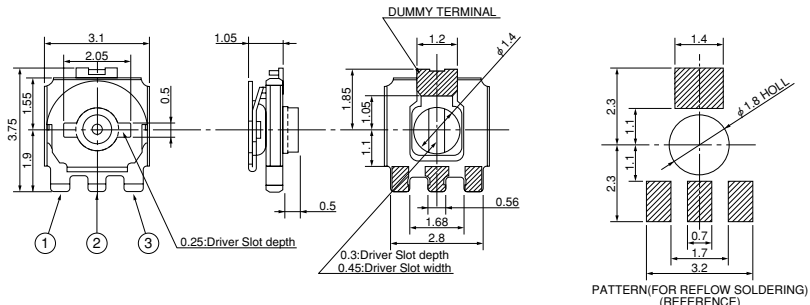
特長

- 小型でしかも薄型です。
- 素子には、メタルグレーズ抵抗体を使用していますので、安定性、耐候性に優れています。
- リフローはんだ付けに対応。
- RoHS適合品です。

用途

カメラ一体型VTR、8mmVTRカメラ、スチールカメラ、ヘッドホンステレオ、液晶テレビ、フロッピーディスクドライブ装置、その他高密度実装が要求される民生・産業用機器。

DIMENSIONS 外形寸法

Model	External Dimensions	Unit:mm
TMC2K2J	Example of Order Number : TMC2K2J-0B10K-TR	
(for automatic adjustment) (Thin type)  ① 3000pcs/Reel	 • If you need the product with an insulated sheet, please request it. • 絶縁シート付き品ご希望の場合は、ご用命願います。	
TMC3K	Example of Order Number : TMC3K-0B10K-TR	
 ② 2000pcs/Reel		
TMC3KJ	Example of Order Number : TMC3KJ-0B10K-TR	
 ③ 2000pcs/Reel		
TMC3K3B	Example of Order Number : TMC3K3B-0B10K-TR	
(Top & back side adjustment)  ④ 2000pcs/Reel		

• Specifications in this catalog are presented basically for informative purposes.

We request the exchange of official approval drawings before placing order.

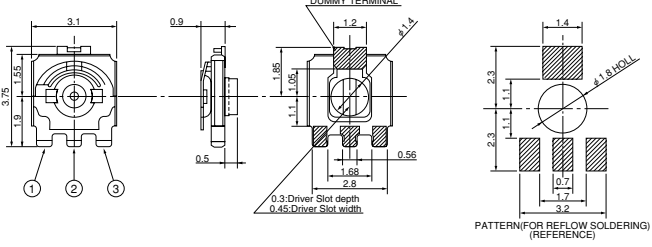
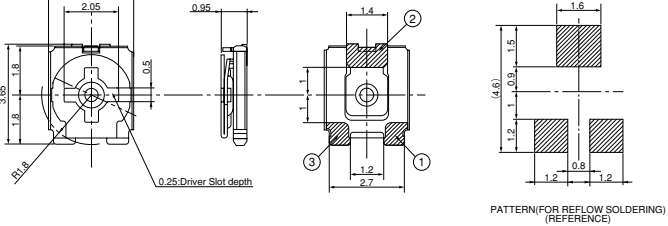
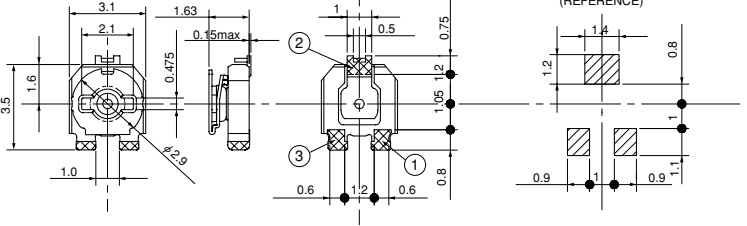
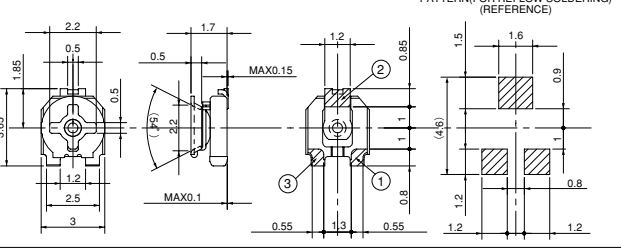
• 当カタログは参考仕様ですので、ご使用にあたっては正式納入仕様書の取り交わしをお願いします。

Chip Trimmer Potentiometers


チップ半固定ポテンシヨメータ

DIMENSIONS

外形寸法

Model	External Dimensions	Unit:mm
TMC3K3R (Back side adjustment)  ⑤ 2000pcs/Reel	Example of Order Number : TMC3K3R-0B10K-TR 	
TMC3K4J (With Rotation stopper) (Thin type)  ⑥ 3000pcs/Reel	Example of Order Number : TMC3K4J-0B10K-TR 	
TMC3K5  ⑦ 2000pcs/Reel	Example of Order Number : TMC3K5-B10K-TR 	
TMC3K6J (for automatic adjustment)  ⑧ 2000pcs/Reel	Example of Order Number : TMC3K6J-B10K-TR 	

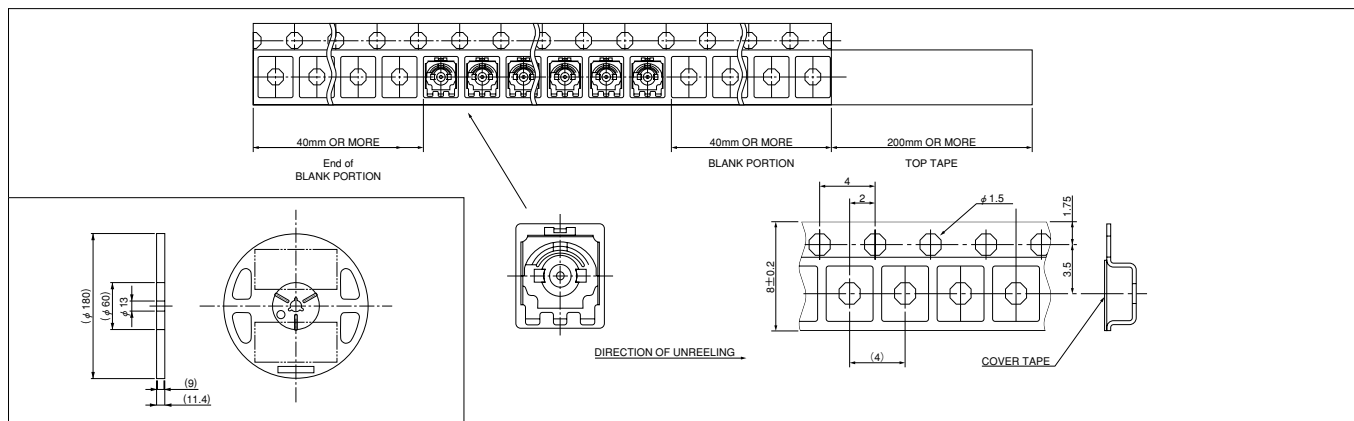REEL DIMENSION



- Specifications in this catalog are presented basically for informative purposes.
We request the exchange of official approval drawings before placing order.
- 当カタログは参考仕様ですので、ご使用にあたっては正式納入仕様書の取り交わしをお願いします。

Chip Trimmer Potentiometers


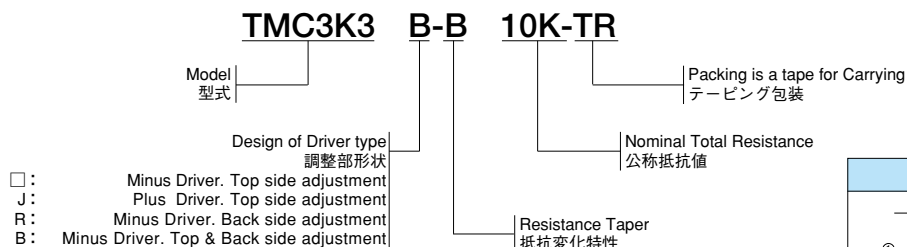
チップ半固定ポテンシヨメータ

TYPE DESIGNATION

品名構成

Example of indicating Order Number

注文番号の記載例




SPECIFICATIONS

仕様

	① TMC2K2J	② TMC3K	③ TMC3KJ	④ TMC3K3B	⑤ TMC3K3R	⑥ TMC3K4J	⑦ TMC3K5	⑧ TMC3K6J
Operating Temperature Range 使用温度範囲	−40 to 100℃	−55 to 125℃						−40 to 110℃
Rated Power 定格電力	0.15W at 70℃							0.2W at 70℃
Maximum Rated Voltage 最高使用電圧	AC50V, DC50V							
Nominal Total Resistance 公称抵抗値（E-3 Series）	100 Ω, 220 Ω, 470 Ω, 1k Ω, 2.2k Ω, 4.7k Ω, 10k Ω, 22k Ω, 47k Ω, 100k Ω, 220k Ω, 470k Ω, 1M Ω, 2.2M Ω							
Total Resistance Tolerance 全抵抗値許容差	Within ±30% of the nominal total resistance	Within ±25% of the nominal total resistance						
Resistance Taper 抵抗変化特性	B（Linner Taper :JIS 0B）							
Resistance Temperature Coefficient 抵抗温度係数	Within ±250ppm/℃							
Total Rotational Angle 全回転角度	Endless（effective rotational angle 260±20°）	Endless（effective rotational angle 250±20°）				270±20°	Endless（effective rotational angle 250±20°）	
Rotational Torque 回転トルク	0.5 to 15mN・m	1 to 20mN・m				1 to 12mN・m	2 to 20mN・m	1 to 12mN・m
Endurance（Sliding） 耐久性（しゅう動）	10cycles	20cycles（10cycles at 100 Ω）		10cycles			20cycles	20cycles（10cycles at 200 Ω less）
Weight at 1 pcs 重さ（1個）	11mg	37mg	40mg	36mg	32mg	31mg	37mg	

REFLOW SOLDERING REQUIREMENTS

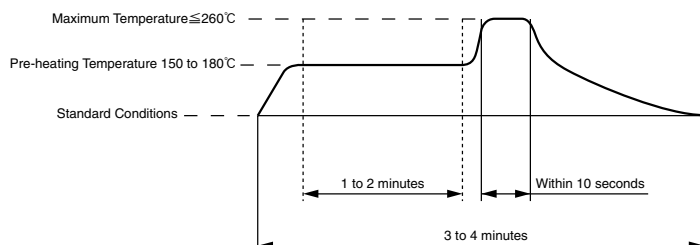Refer to the figure below for profile of reflow soldering.



Note1. Manual Soldering:

In case of soldering by a solder iron, it shall be finished within 3 seconds and the temperature of the tip of the soldering iron shall be 350°C max.

Note2. Flux Rinsing:

After reflow soldering operation, part may be used without rinsing, if flux is well controlled. In case flux rinsing is done, flux shall be removed sufficiently.

注1) 手付けはんだ

端子のはんだ付け作業を、手はんだで実施する場合は、はんだコテ先温度、350°C (20Wコテ)、3秒以下で手際よくお済ませ下さい。

注2) フラックス洗浄

本品は、リフローはんだ付け後、洗浄なしでも使用できます。ただし、フラックスあがりには十分ご注意ください。また、洗浄する場合には、十分フラックスを除去してください。

•Specifications in this catalog are presented basically for informative purposes.

We request the exchange of official approval drawings before placing order.

•当カタログは参考仕様ですので、ご使用にあたっては正式納入仕様書の取り交わしをお願いします。