

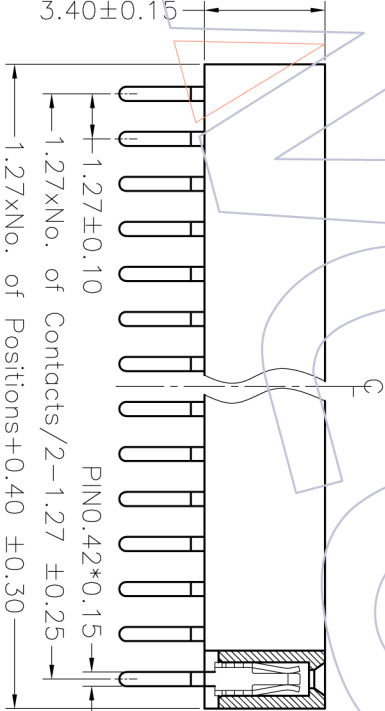
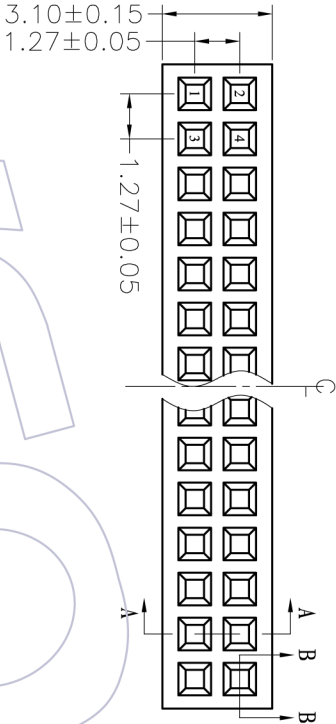


NOTES:

Current Rating: 1.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩmin
Operation Temperature: -40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Au or Sn over Ni
Insulator Material: PA6T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

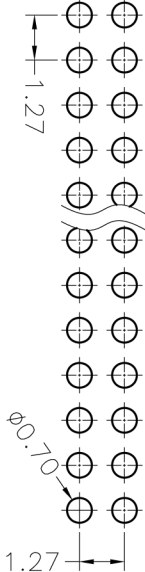

Ordering Information


2334-2 XX S XX CUNT 1

No. of Pins per ROW: 42-50PIN

Contact Plating:
G0=Gold Flash

Packing:
T=Tube

G1=3μ"Gold
G2=5μ"Gold
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S1=3μ"Gold/Tin
S2=5μ"Gold/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin

					OPERATION		DRAW			SCALE	3:1	WYCON 维峰五金电子有限公司 WAVE HARDWARE ELECTRONICS CO. LTD		
					X.X	±0.40				UNIT	mm	PART NO.	2334-2YXSXCUNT1	
					X.XX	±0.25	DESIGN			SIZE	A4			
					X.XXX	±0.15	CHECK			SHEET	1/1	TITLE:	PH1. 27 DUAL H=3.4 180°	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3°	APPROVE			PROJ.		Customer NO.		
A0	08/02/14	NEW	——	——										