


## Bluetooth Module Feature (CR-BT200)

- UART Baudrate : 9600bps – 1382.4 Kbps
- Interface : UART
- Typical current consumption : 30uA
- Support Bluetooth 2.0 ER/BDR
- Operating Supply Voltage : 2.7 ~ 3.6V
- Operating Temperature : -20 °C ~ 70 °C
- Dimensions : 26mm(W) x 23mm(H)

## Shipping Matrials


- CR-BT100 Board : 1ea

## Dimensions

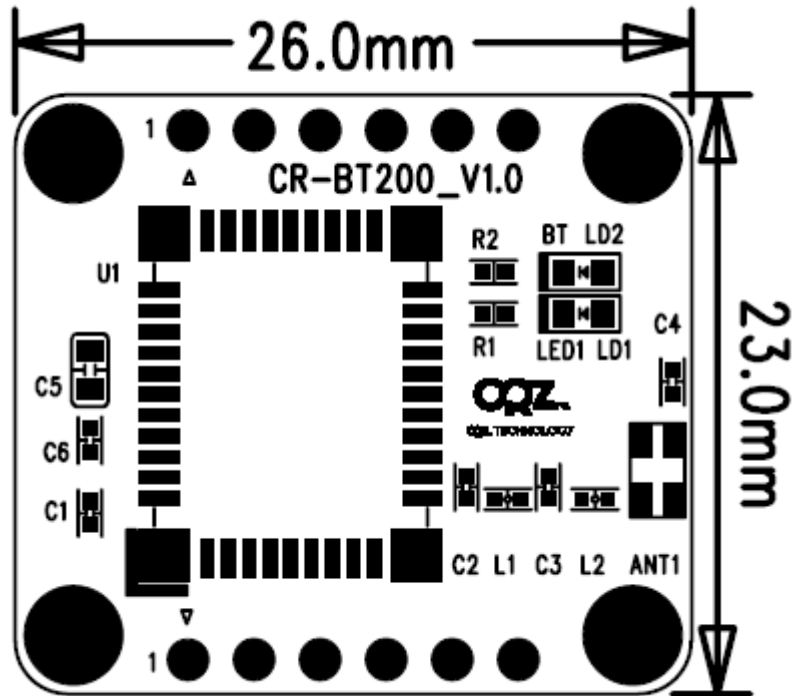

## Pin Map

NO	Pin Assignment
1	VDD_3V3
2	BT_UART_RX
3	BT_UART_TX
4	BT_PIO2
5	BT_PIO4
6	GND

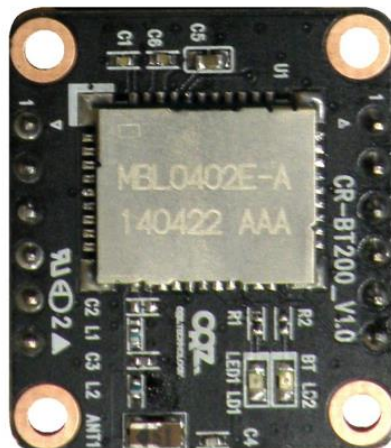

Pin Assignment	NO
BT_SPI_CSB	1
BT_SPI_MISO	2
BT_SPI_MOSI	3
BT_SPI_CLK	4
BT_RSTn	5
BT_PIO5	6

Email : [help@crz-tech.com](mailto:help@crz-tech.com) ( 031-701-5057)