



SINGLE PORT 10/100 BASE-T SMD LAN TRANSFORMERS

P/N: LCZ3A1CB

Page : 1/2

Feature


- Compliant with IEEE 802.3u and ANSI X3.263 standards.
- Symmetrical TX and RX channels for auto MDI/MDIX capability.
- Customer designs available for specific application.
- RoHS compliant.



Electrical Specifications @ 25°C								
Part Number	Turns Ratio (±5%)		OCL(uH Min) @ 100KHz/0.1V with 8.0mA DC	Insertion Loss (dB Max)		HI-POT (Vrms)		
	TX	RX		0.3-100MHz				
LCZ3A1CB	1CT:1CT	1CT:1CT	350	-1.15		1500		
Electrical Specifications @ 25°C								
Part Number	Return Loss (dB Min)			Cross Talk (dB Min)		DCMR (dB Min)		
	0.3-30MHz	30-60MHz	60-80MHz	0.3-60MHz	60-100MHz	60MHz	100MHz	200MHz
LCZ3A1CB	-16	-12	-10	-45	-35	-37	-28	-25

* Operating temperature range: 0°C to +70°C. Storage temperature range: -25°C to +125°C.


Schematic

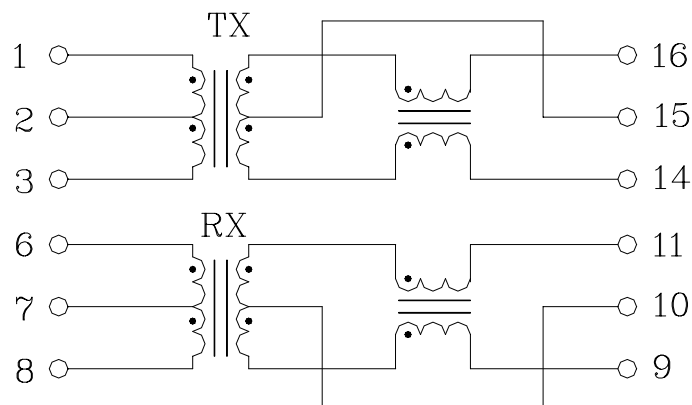



P/N: LCZ3A1CB

Mechanical

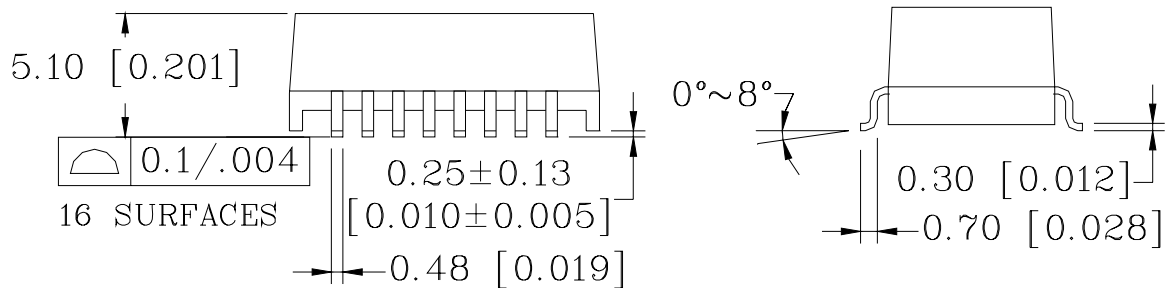

NOTE:

V0	2006/Jun.	Datasheet Set Up
V1	2007/Mar.	