



# CDTech(H.K.)Electronics Limited

## Product Specifications

<b>Customer</b>	
<b>Model Name</b>	S065WV02
<b>Description</b>	Standard LCD Module 800(RGB)x320 Dots 6.5" TFT LCD
<b>Date</b>	2014/6/17
<b>Revision</b>	1.0

<b>Customer Approval</b>	
<b>Date</b>	
The above signature represents that the product specifications, testing regulation, and warranty in the specifications are accepted	

<b>Engineering</b>			
<b>Check</b>	<b>Date</b>	<b>Prepared</b>	<b>Date</b>



# CDTech(H.K.)Electronics Limited

## Table of Contents

1. Record of Revision .....	3
2. General Specifications .....	4
3. Input/Output Terminals.....	5
4. Absolute Maximum Ratings .....	5
5. Electrical Characteristics .....	6
6. Optical Characteristics.....	9
7. Environmental / Reliability Tests .....	13
8. Mechanical Drawing .....	14
9. Packing .....	15
10. Precautions For Use of LCD modules.....	16

# CDTech(H.K.)Electronics Limited

## 1. Record of Revision

Rev	Issued Date	Description	Editor
1.0	2014/6/17	First Release.	shiyaoliang

# CDTech(H.K.)Electronics Limited

## 2. General Specifications

Feature		Spec
Characteristics	Size	6.5 inch
	Resolution	800(horizontal)*320(Vertical)
	Interface	24-bit RGB
	Connect type	Connector
	Color Depth	262K
	Technology type	a-Si
	Display Spec. Pixel pitch (mm)	0.192 x 0.1805
	Pixel Configuration	R.G.B. Vertical Stripe
	Display Mode	Normally White
	Driver IC	HX8264-D,HX8664-B
	Surface Treatment	HC
	Viewing Direction	6 O'clock
Mechanical	LCM (W x H x D) (mm)	164.9*75.56*3.55
	Active Area(mm)	154.08 x 57.28
	With /Without TSP	Without TSP
	Weight (g)	TBD
	LED Numbers	27 LEDs

Note 1: Viewing direction is follow the data which measured by optics equipment.

Note 2: Requirements on Environmental Protection: RoHS

Note 3: LCM weight tolerance: +/- 5%

# CDTech(H.K.)Electronics Limited

## 3. Input/Output Terminals

No.	Symbol	Description
1	K	Power for LED backlight cathode
2	A	Power for LED backlight anode
3	GND	Ground
4	VDD	Power supply
5~12	R0~R7	Data bus
13~20	G0~G7	Data bus
21~28	B0~B7	Data bus
29	DGND	Ground
30	DOTCLK	Pixel clock
31	DISP	Display on/ off
32	HSYNC	Horizontal sync Signal
33	VSYNC	Vertical sync signal
34	DE	Data Enable
35	NC	No connected
36	GND	System Ground
37	XR(NC)	The right side signal pin of TP
38	YD(NC)	The bottom side signal pin of TP
39	XL(NC)	The left side signal pin of TP
40	YU(NC)	The top side signal pin of TP

## 4. Absolute Maximum Ratings

### Driving TFT LCD Panel

Item	Symbol	MIN	MAX	Unit	Remark
Supply Voltage	$V_{CC}$	-0.3	6	V	
Operating Temperature	$T_{OPR}$	-20	70	°C	
Storage Temperature	$T_{STG}$	-30	80	°C	

# CDTech(H.K.)Electronics Limited

## 5. Electrical Characteristics

### 5.1 Driving TFT LCD Panel

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	VDD	3.0	3.3	3.6	V
Current of power supply	IVDD	-	4.0	10	mA
Input voltage 'H' level	VIH	0.7VDD	-	VDD	V
Input voltage 'L' level	VIL	0	-	0.3VDD	V



Ta = 25 °C

### 5.2 Interface Timing


Item	Symbol	Min.	Typ.	Max.	Unit	Note
DCLK cycle time	Tcph	25			ns	
DCLK frequency	fclk		30	40	MHz	
DCLK pulse duty	Tcwh	40	50	60	%	
VSD setup time	Tvst	8			ns	
VSD hold time	Tvhd	8			ns	
HSD setup time	Thst	8			ns	
HSD hold time	Thhd	8			ns	
Data setup time	Tdsu	8			ns	
Data hold time	Tdhd	8			ns	
DE setup time	Tesu	8			ns	
DE hold time	Tehd	8			ns	
Horizontal display area	thd		800		Tcph	
HSD period time	th		928		Tcph	
HSD pulse width	thpw	1	48		Tcph	
HSD back porch	thb		40		Tcph	
HSD front porch	thfp		40		Tcph	
Vertical display area	tvd		480		th	
VSD period time	tv		525		th	
VSD pulse width	tvpw		3		th	
VSD back porch	tvb		29		th	
VSD front porch	tvfp		13		th	

# CDTech(H.K.)Electronics Limited

## Timing Diagram of Interface Signal

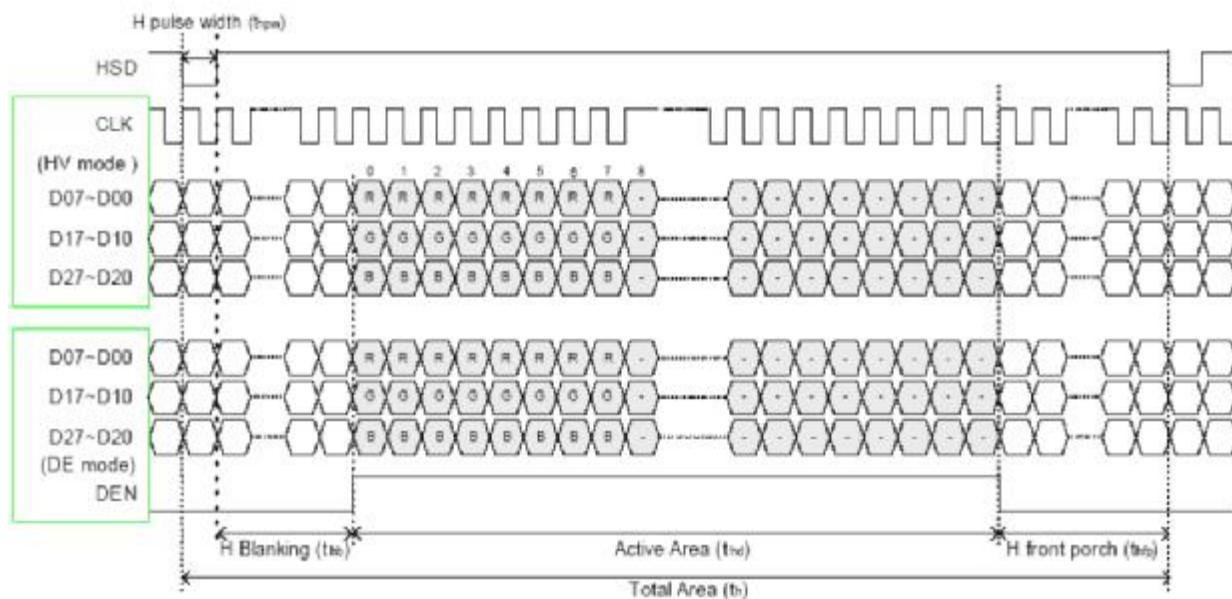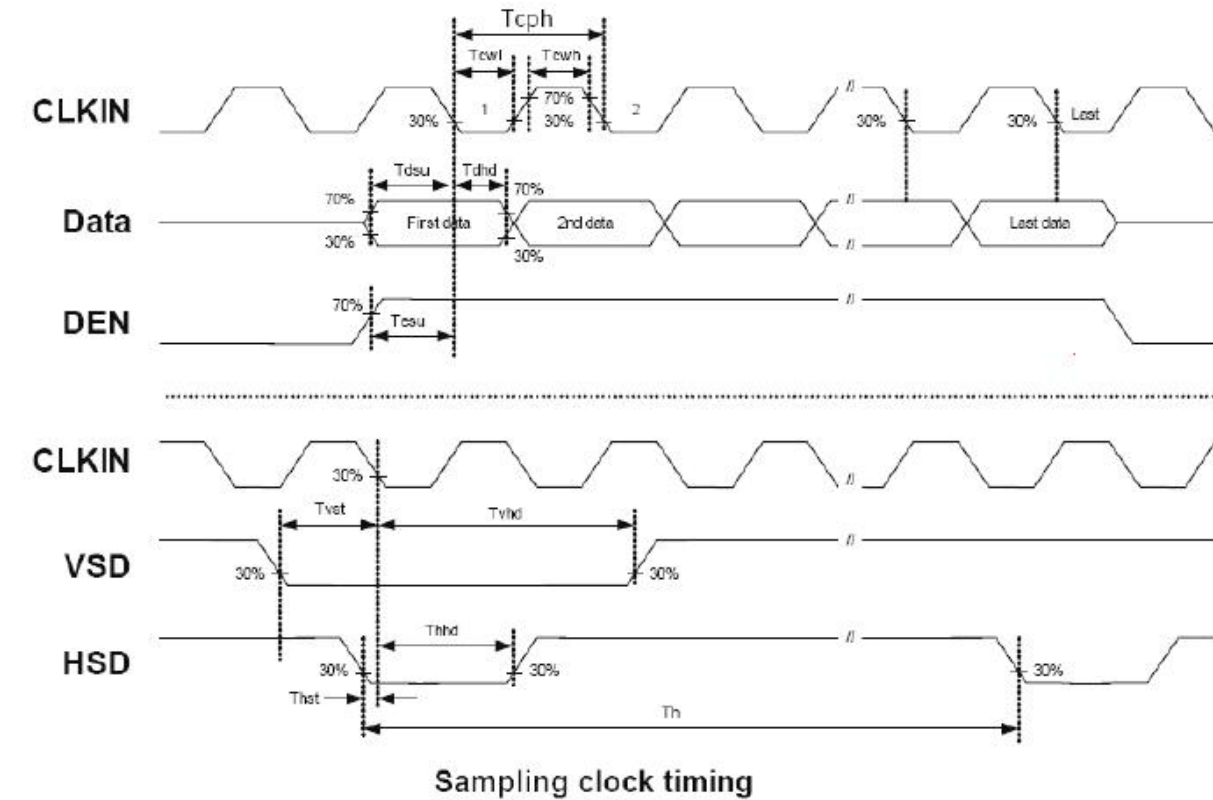

# CDTech(H.K.)Electronics Limited

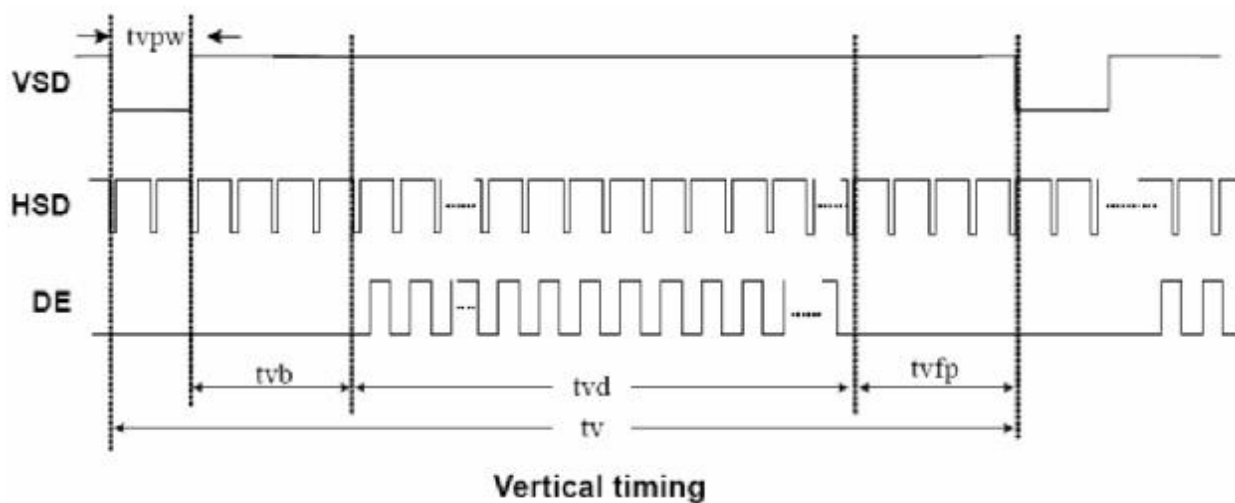

## 5.3 Driving Backlight

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	$I_F$	160	180	200	mA	
Forward Voltage	$V_F$	9.3	9.6	9.9	V	
Backlight Power consumption	$W_{BL}$	1.488	1.728	1.98	W	

Note 1: Each LED :  $I_F = 20\text{ mA}$ ,  $V_F = 3.2\text{V}$ .

Note 2: Optical performance should be evaluated at  $T_a = 25^\circ\text{C}$  only.

Note 3: If LED is driven by high current, high ambient temperature & humidity condition. The life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

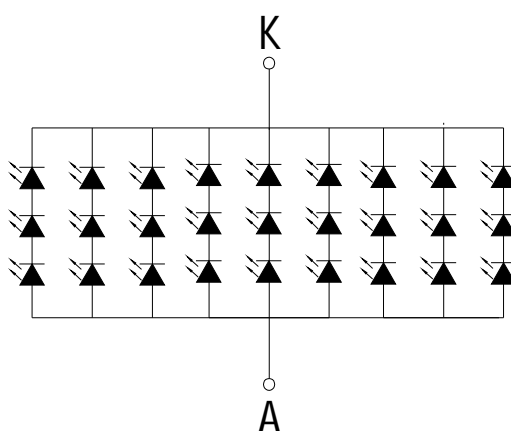


Figure : LED connection of backlight



## 6. Optical Characteristics

Items		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angles		$\theta_T$	Center CR≥10		60	-	Degree.	Note2
		$\theta_B$			55	-		
		$\theta_L$			50	-		
		$\theta_R$			50	-		
Contrast Ratio		CR	$\Theta =0$	-	400	500	-	Note1, Note3
Response Time		T <sub>ON</sub>	25°C	-	5	7	ms	Note1, Note4
		T <sub>OFF</sub>		-	20	28		
Chromaticity	White	X <sub>W</sub>	Backlight is on	TBD	TBD	TBD	-	Note1, Note5
		Y <sub>W</sub>		TBD	TBD	TBD	-	
	Red	X <sub>R</sub>		TBD	TBD	TBD	-	
		Y <sub>R</sub>		TBD	TBD	TBD	-	
	Green	X <sub>G</sub>		TBD	TBD	TBD	-	
		Y <sub>G</sub>		TBD	TBD	TBD	-	
	Blue	X <sub>B</sub>		TBD	TBD	TBD	-	
		Y <sub>B</sub>		TBD	TBD	TBD	-	
Uniformity		U		-	70	-	%	Note1, Note6
Luminance		L		400	450			Note1, Note7


Test Conditions:

1. IF= 20mA(one channel),the ambient temperature is 25.
2. The test systems refer to Note 1 and Note 2.

Note 1:Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

# CDTech(H.K.)Electronics Limited

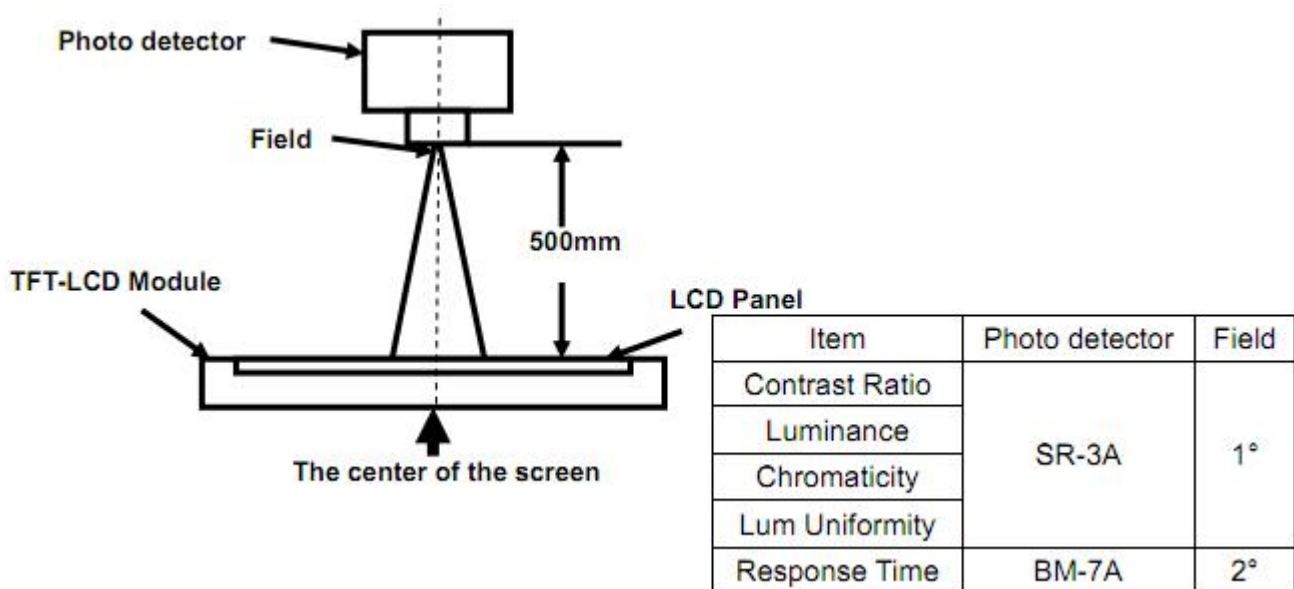

Note 2: Definition of viewing angle range and measurement system.  
viewing angle is measured at the center point of the LCD by CONOSCOPE(ergo-80).

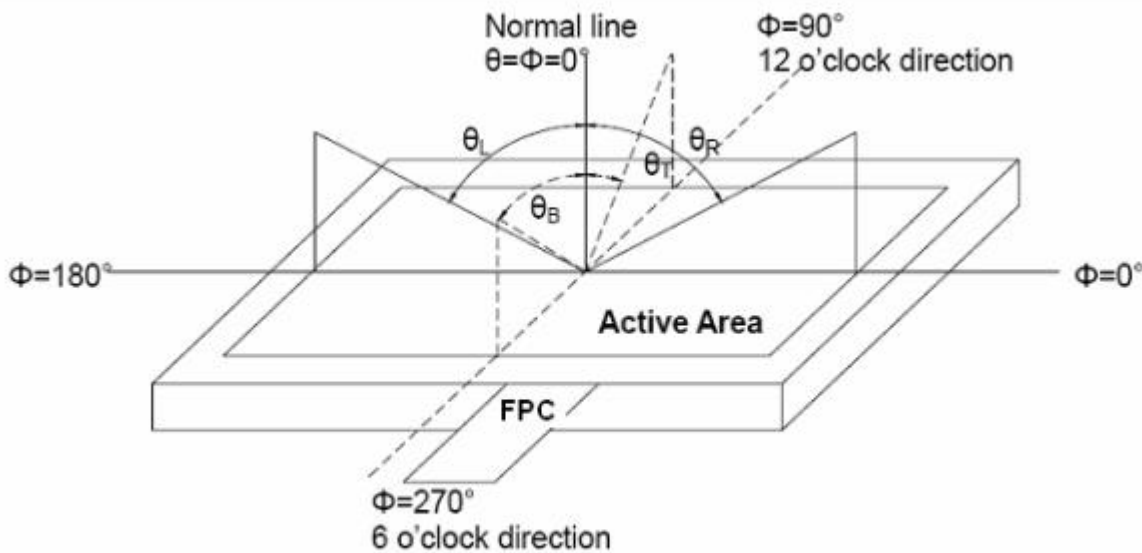


Fig. 1 Definition of viewing angle

Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

# CDTech(H.K.)Electronics Limited


“White state “:The state is that the LCD should driven by  $V_{white}$ .

“Black state”: The state is that the LCD should driven by  $V_{black}$ .

$V_{white}$ : To be determined       $V_{black}$ : To be determined.

## Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time ( $T_{ON}$ ) is the time between photo detector output intensity changed from 90% to 10%. And fall time ( $T_{OFF}$ ) is the time between photo detector output intensity changed from 10% to 90%.

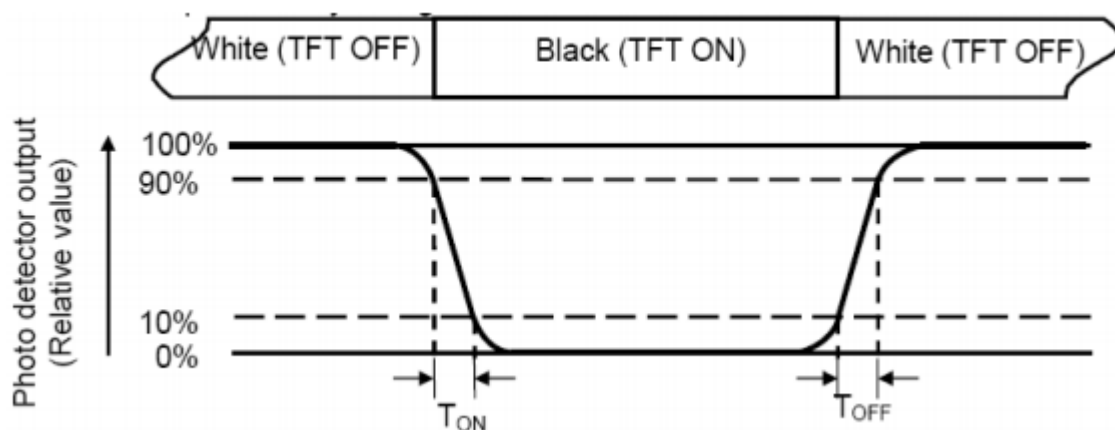

## Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

## Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity}(U) = L_{min} / L_{max}$$

L-----Active area length W----- Active area width

# CDTech(H.K.)Electronics Limited

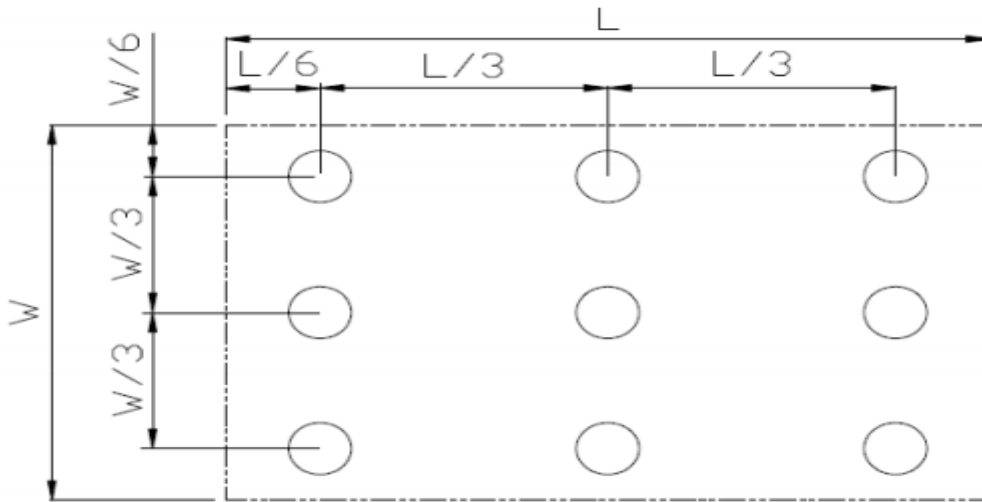


Fig. 2 Definition of uniformity

Lmax: The measured maximum luminance of all measurement position.

Lmin: The measured minimum luminance of all measurement position.

Note 7: Definition of Luminance :

Measure the luminance of white state at center point.

# CDTech(H.K.)Electronics Limited


## 7. Environmental / Reliability Tests

No	Test Item	Condition	Remarks
1	High Temperature Operation	T <sub>s</sub> = +70℃, 240hrs	Note 1 IEC60068-2-2, GB2423. 2-89
2	Low Temperature Operation	T <sub>a</sub> = -20℃, 240hrs	Note 2 IEC60068-2-1 GB2423.1-89
3	High Temperature Storage	T <sub>a</sub> = +80℃, 240hrs	IEC60068-2-2 GB2423. 2-89
4	Low Temperature Storage	T <sub>a</sub> = -30℃, 240hrs	IEC60068-2-1 GB/T2423.1-89
5	High Temperature & Humidity Storage	T <sub>a</sub> = +60℃, 90% RH max, 160 hours	IEC60068-2-3 GB/T2423.3-2006
6	Thermal Shock (Non-operation)	-30℃ 30 min ~ +80℃ 30 min Change time: 5min, 30 Cycle	Start with cold temperature, end with high temperature IEC60068-2-14, GB2423.22-87
7	Electro Static Discharge (Operation)	C=150pF, R=330 Ω, 5 points/panel Air:±8KV, 5 times; Contact: ±4KV, 5 times; (Environment: 15℃ ~ 35℃, 30% ~ 60%, 86Kpa ~ 106Kpa)	IEC61000-4-2 GB/T17626.2-1998
8	Vibration (Non-operation)	Frequency range: 10~55Hz, Stroke: 1mm Sweep: 10Hz~55Hz~10Hz 2 hours for each direction of X .Y. Z. (package condition)	IEC60068-2-6 GB/T2423.5-1995
9	Shock (Non-operation)	60G 6ms, ± X, ±Y , ± Z 3 times for each direction	IEC60068-2-27 GB/T2423.5-1995
10	Package Drop Test	Height: 80 cm, 1 corner, 3 edges, 6 surfaces	IEC60068-2-32 GB/T2423.8-1995

Note: 1. T<sub>s</sub> is the temperature of panel's surface.


2. T<sub>a</sub> is the ambient temperature of sample.

## 8. Mechanical Drawing

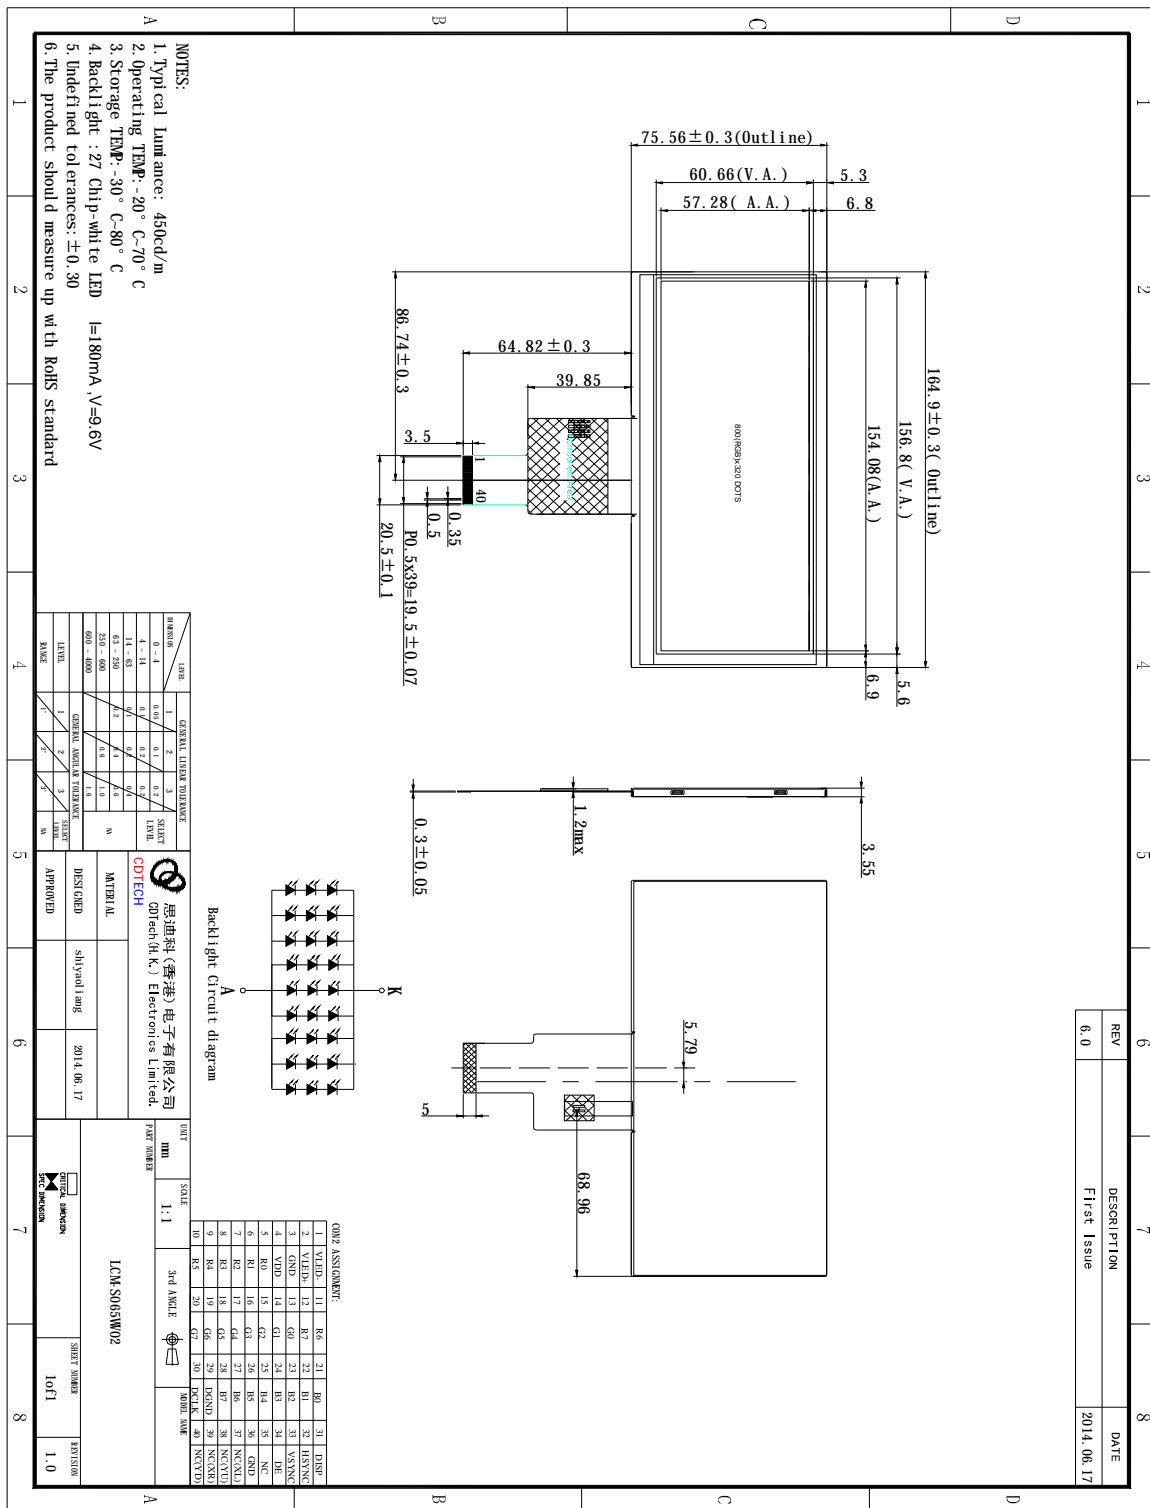

## 9. Packing

### Packing Method

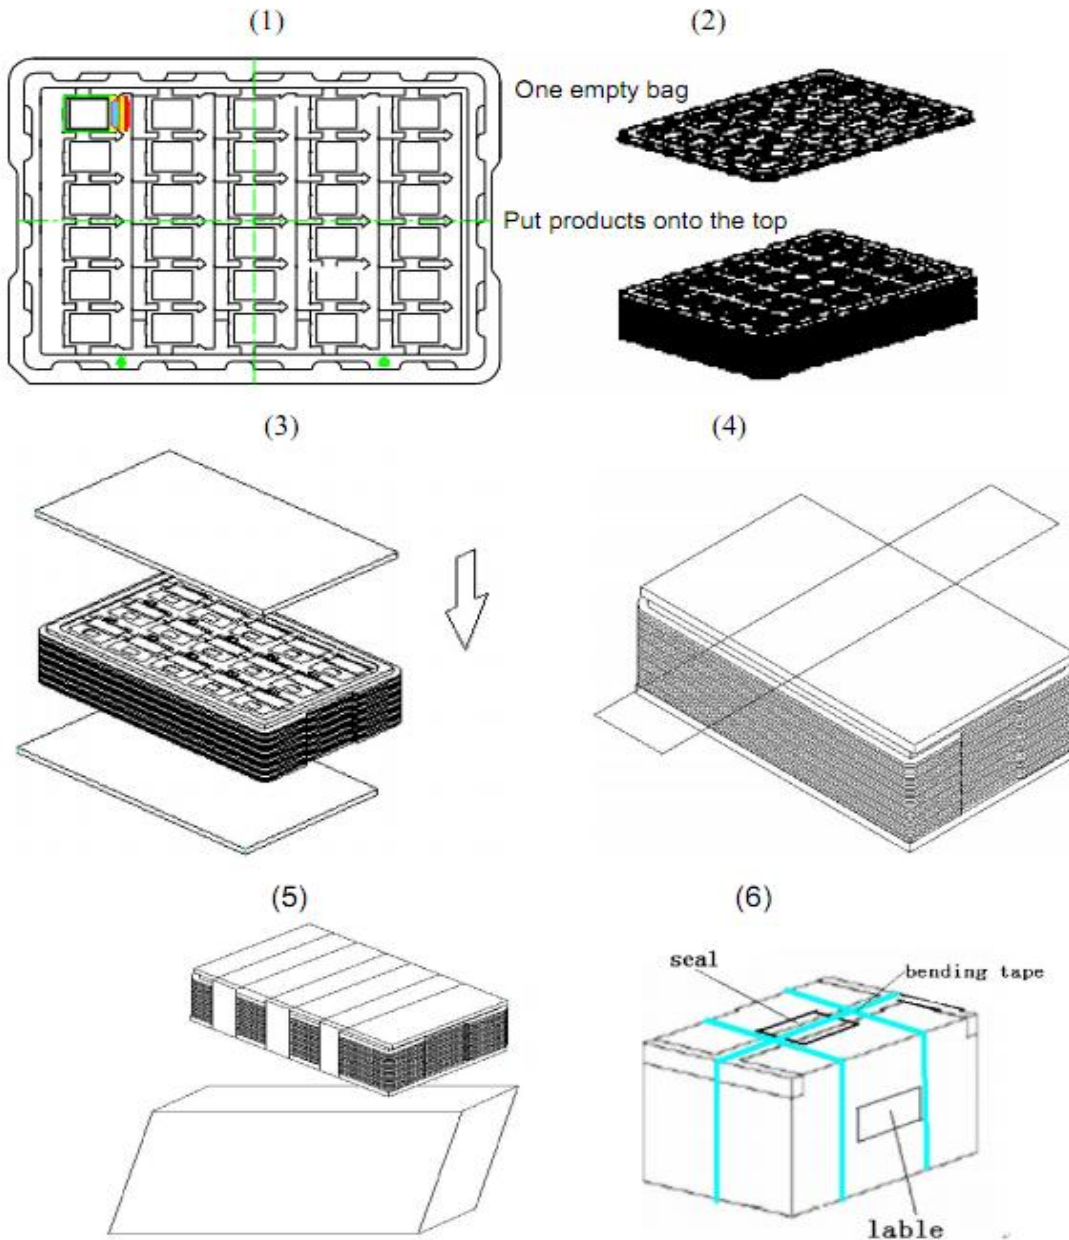

1. Put module into tray cavity:
2. Tray stacking
3. Put 1 cardboard under the tray stack and 1 cardboard above:
4. Fix the cardboard to the tray stack with adhesive tape:
5. Put the tray stack into carton.
6. Carton sealing with adhesive tape.

## **10. Precautions For Use of LCD modules**

### **10.1 Handling Precautions**

10.1.1. The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

10.1.2. If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

10.1.3. Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

10.1.4. The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

10.1.5. If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

10.1.6. Do not attempt to disassemble the LCD Module.

10.1.7. If the logic circuit power is off, do not apply the input signals.

10.1.8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

10.1.8.1. Be sure to ground the body when handling the LCD Modules.

10.1.8.2. Tools required for assembly, such as soldering irons, must be properly ground.

10.1.8.3. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

10.1.8.4. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

### **10.2 Storage Precautions**

10.2.1. When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

10.2.2. The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : 0℃ ~ 40℃      Relatively humidity: ≤80%

10.2.3. The LCD modules should be stored in the room without acid, alkali and harmful gas.

### **10.3 Transportation Precautions**

The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.