


300S Series

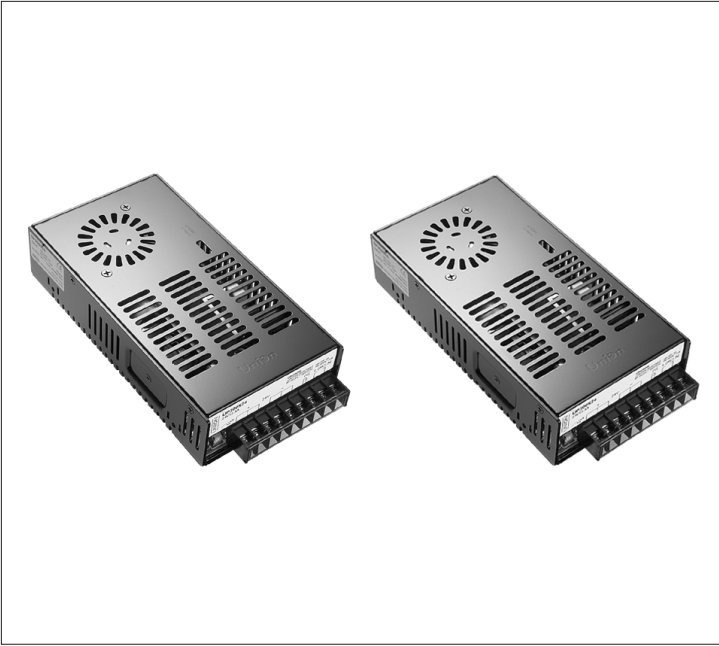

300W 1-Channel


- **5V60A/12V25A/24V12.5A/36V8.3A/48V6.2A Output**
- **Dual Input Voltage Range (AC100-120V/AC200-240V)**
- **Built-in Inrush Current Limitter, Over Current Protector and Over Voltage Protector**
- **Over Temperature Protection**
- **Approved by EN 60950-1 CE**

SPECIFICATIONS


Item		UP300S05	UP300S12	UP300S24	UP300S36	UP300S48
INPUT	VOLTAGE	AC100~120V/200~240V				5.5A typ (ACIN 110V, Io=100%) 3.5A typ (ACIN 220V, Io=100%)
	FREQUENCY	50/60Hz(47~63Hz)				
	EFFICIENCY	75% Typ	80% Typ	85% Typ	85% Typ	85% Typ
	INRUSH CURRENT	20A Typ(ACIN 110V, Io=100%)/40A Typ(ACIN 220V, Io=100%) at cold start				
OUTPUT	VOLTAGE [V]	5	12	24	36	48
	CURRENT [A]	60.0	25.0	12.5	8.3	6.2
	LINE REGULATION [mV]	25 Max	60 Max	120 Max	180 Max	240 Max
	LOAD REGULATION [mV]	50 Max	120 Max	240 Max	360 Max	480 Max
	RIPPLE [mVp-p]	50 Max	120 Max	240 Max	360 Max	480 Max
	RIPPLE NOISE [mVp-p]	100 Max	170 Max	290 Max	410 Max	530 Max
	TEMPERATURE DRIFT,0-50℃ [mV]	50 Max	120 Max	240 Max	360 Max	480 Max
	RISE TIME [msec]	600 Max (ACIN 100V/200V, Io=100%)				
	HOLDING TIME [msec]	20 Typ(ACIN 100V/200V Io=100%)				
PROTEC-TION	OVER CURRENT PROTECTION	Works at over 110% of rating and recovers automatically				
	OVER VOLTAGE PROTECTION	Works at 115~140% of rating				
ISOLAT-ION	INPUT-OUTPUT	AC3,000V for 1 minute, DC500V 100Mohm (At room temp. & humid.)				
	INPUT-CASE, FG	AC1,500V for 1 minute, DC500V 100Mohm (At room temp. & humid.)				
	OUTPUT-CASE	AC500V for 1 minute, DC500V 100Mohm (At room temp. & humid.)				
ENVIRON-MENT	OPERATING TEMP. & HUMID.	-10~+50℃, 20~90%RH(Non condensing)				
	STORAGE TEMP. & HUMID.	-20~+75℃, 20~90%RH(Non condensing)				
	VIBRATION	10~55Hz at 1G 3 minutes period, 30 minutes along X, Y and Z axis				
	IMPACT	10G for 20 msec, Once on each X, Y and Z axis				
	APPROVALS	CE	CE	CE	CE	CE

## 300S Series

## BLOCK DIAGRAM

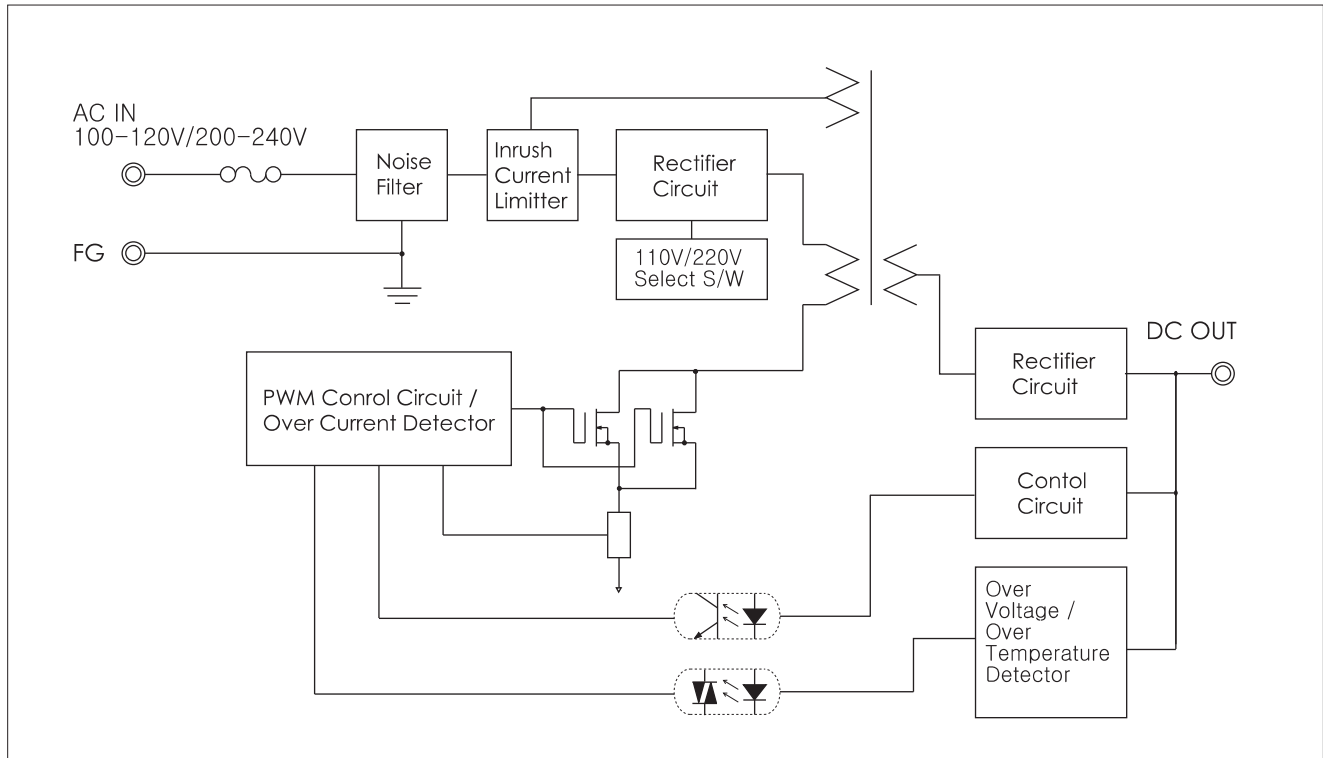


## DIMENSIONS(UNITS : MM)

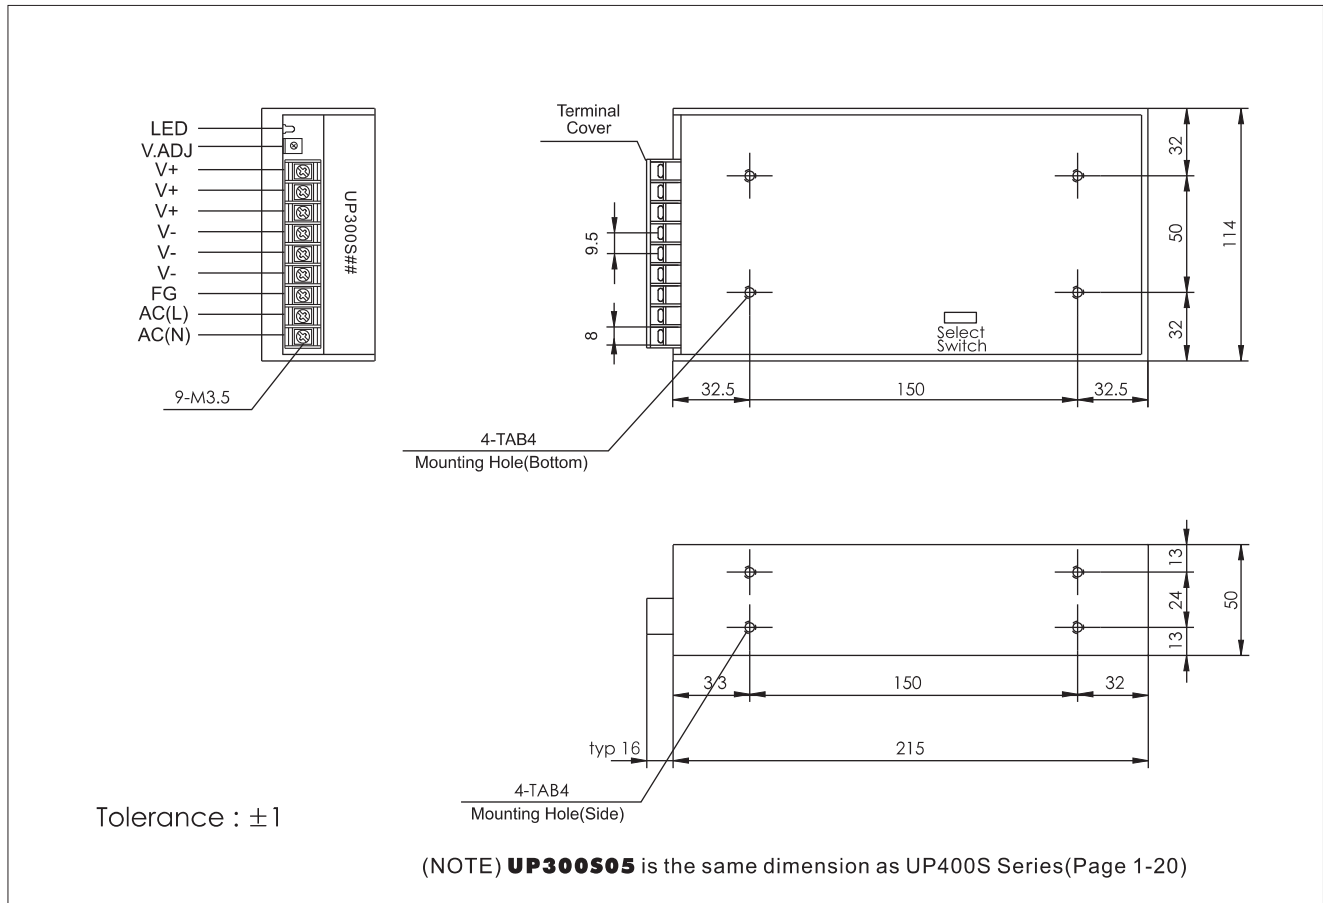


## 9. 300S Series(300S05)


### A. OVER CURRENT CHARACTERISTICS

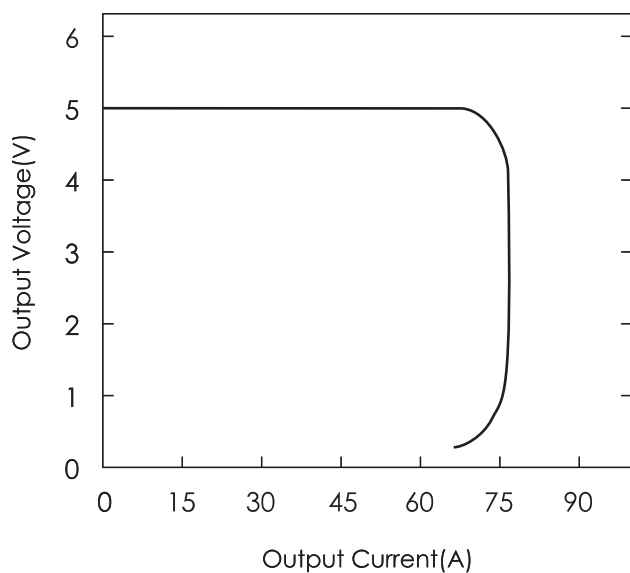


### B. DERATING CHARACTERISTICS

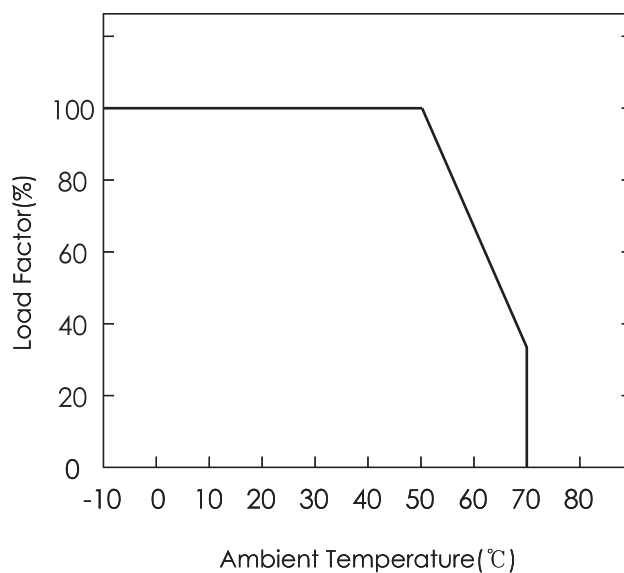




### C. EFFICIENCY CHARACTERISTICS

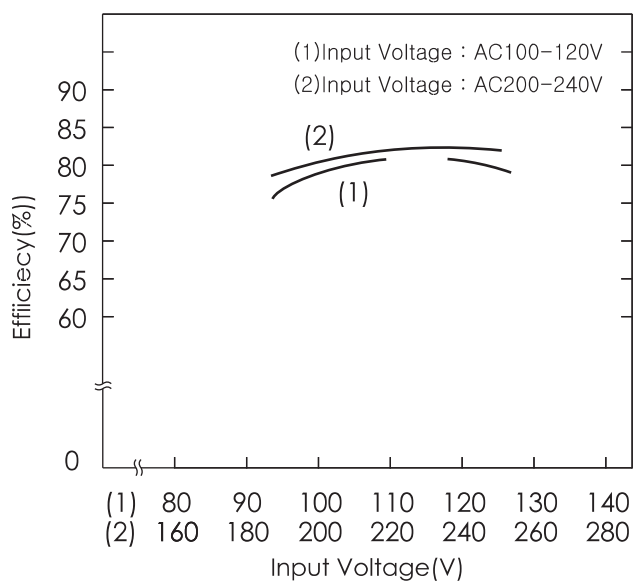

### D. RISING/FALLING TIME CHARACTERISTICS

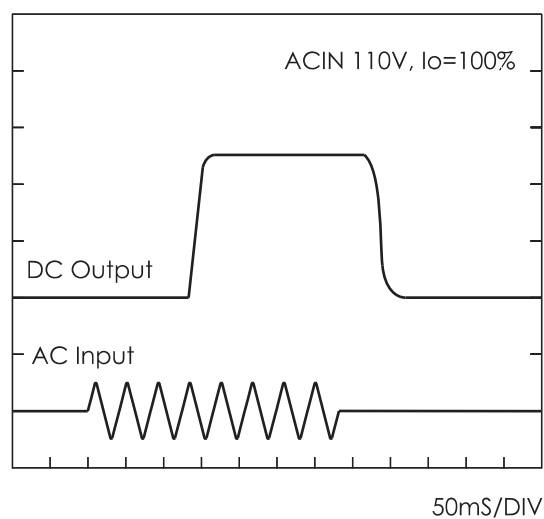

BRACKET

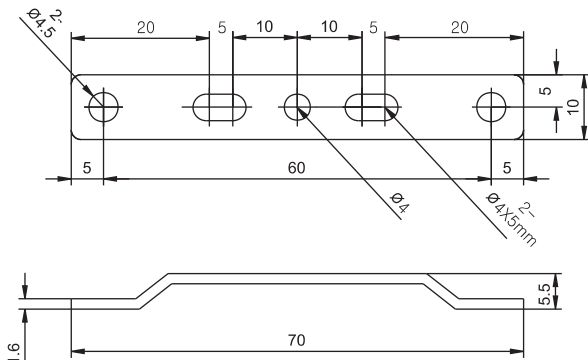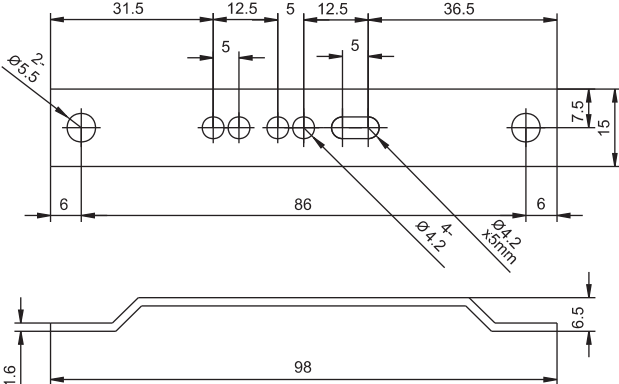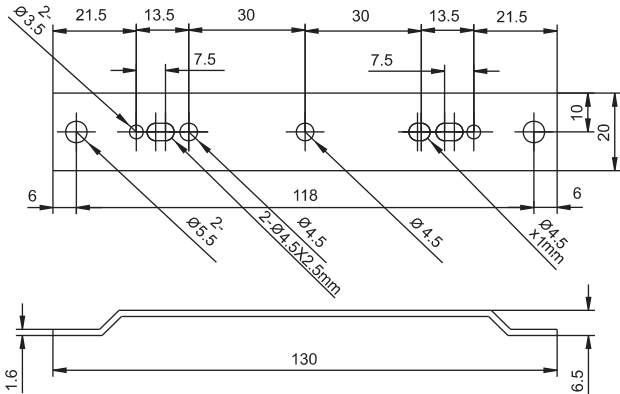MODEL	APPLICATION	DIMENSIONS(UNIT:mm)
BRACKET-A	15S Series 30S Series 50S Series 75S Series 100S Series 150S Series 200S Series 220S Series 15D Series 30D Series 50D Series 15T Series 30T Series 50T Series	 <p>Technical drawing of Bracket A. The top view shows a rectangular plate with a total width of 60mm and a total length of 70mm. It features five mounting holes with a diameter of <math>\phi 4.5</math>mm. The hole positions are defined by dimensions: 20mm from the left edge to the first hole, 5mm between the first and second holes, 10mm between the second and third holes, 10mm between the third and fourth holes, 5mm between the fourth and fifth holes, and 20mm from the fifth hole to the right edge. The plate has a thickness of 1.6mm and a mounting flange height of 5.5mm. The side view shows a profile with a total length of 70mm and a mounting flange height of 5.5mm.</p>
BRACKET-B	300S Series 400S Series	 <p>Technical drawing of Bracket B. The top view shows a rectangular plate with a total width of 86mm and a total length of 98mm. It features five mounting holes with a diameter of <math>\phi 5.5</math>mm. The hole positions are defined by dimensions: 31.5mm from the left edge to the first hole, 12.5mm between the first and second holes, 5mm between the second and third holes, 12.5mm between the third and fourth holes, and 36.5mm from the fourth hole to the right edge. The plate has a thickness of 1.6mm and a mounting flange height of 6.5mm. The side view shows a profile with a total length of 98mm and a mounting flange height of 6.5mm.</p>
BRACKET-C	500S Series 600S Series 650S Series 750S Series 850S Series 1000S Series 1200S Series 1500S Series	 <p>Technical drawing of Bracket C. The top view shows a rectangular plate with a total width of 118mm and a total length of 130mm. It features five mounting holes with a diameter of <math>\phi 4.5</math>mm. The hole positions are defined by dimensions: 21.5mm from the left edge to the first hole, 13.5mm between the first and second holes, 30mm between the second and third holes, 30mm between the third and fourth holes, 13.5mm between the fourth and fifth holes, and 21.5mm from the fifth hole to the right edge. The plate has a thickness of 1.6mm and a mounting flange height of 6.5mm. The side view shows a profile with a total length of 130mm and a mounting flange height of 6.5mm.</p>

# C E R T I F I C A T E



of Conformity  
Low Voltage Directive 73/23/EEC  
as last amended by EEC Directive 93/68/EEC

Registration No.: AN 50021877 0002

Report No.: 13001281 002

Holder: Union Elecom Co., Ltd.  
34-2, Samjeong-dong, Ojeong-gu  
Bucheon, Gyeonggi-do 421-150  
Rep. of Korea

Product: Schaltnetzteil  
Switching Mode Power Supply

Identification: Type Designations: UP200S\*\*  
UP220S\*\*  
\*\* = 05, 12, 15, or 24  
UP300S\*\*  
\*\* = 05, 12, or 24

Serial no. : n.a. (Prototype)

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with all revision of Annex I of Council Directive 73/23/EEC, in its latest amended version, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to Annex III of the Directive.

Cologne, 21.02.2003



Certification Body

Dr. R. Frankenberger

TÜV Rheinland Product Safety GmbH - Am Grauen Stein - D-51105 Köln

CE The CE marking may be used if all relevant and effective EC Directives are complied with. CE

# C E R T I F I C A T E



of Conformity  
Low Voltage Directive 2006/95/EC

Registration No.: AN 50136622 0001

Report No.: 13500085 001


Holder: Union Elecom Co., Ltd.  
(Chunui Techno Park 1st 1207~1211)  
200-1m Chunui-dong, Wonmi-gu,  
Bucheon, Gyeonggi-do 420-857  
Rep. of Korea

Product: Switching Power Supply  
Switching Mode Power Supply

Identification: Type Designations: UP300S\*\* , UP200S\*\* , UP150S\*\*  
(\*\* = 36 or 48)

Serial no. : n.a. (Prototype)

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with all revision of Annex I of Council Directive 2006/95/EC, in its latest amended version, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to Annex III of the Directive.



Certification Body

Cologne, 29.08.2008

  
Dipl.-Ing. D. Löffler

TÜV Rheinland Product Safety GmbH - Am Grauen Stein - D-51105 Köln

CE The CE marking may be used if all relevant and effective EC Directives are complied with. CE