TBL Series(6)




BOLT/Low-volt 3-Phase

- **250 - 300Amp 250V**
- **Excellent Filtering for Normal Mode and common Mode Noise**
- **Low Leakage**
- **Bolt Terminals**
- **Suitable for Industrial & Medical Equipments, OA & FA Equipments, Measuring Equipments, etc.**


SPECIFICATIONS

Item	UF250TBL	UF300TBL	Unit
RATED CURRENT	250	300	A
RATED VOLTAGE	250 Max		V
TEST VOLTAGE	1,500Vrms between line and earth for 1 minute		/
ISOLATION RESISTANCE	500Vdc 300Mohm between line and earth		/
LEAKAGE CURRENT	1 Max		mA
TEMPERATURE RISE	40 Max		℃
OPERATING TEMPERATURE	-25 ~ +85		℃
APPROVALS			/

BLOCK DIAGRAM

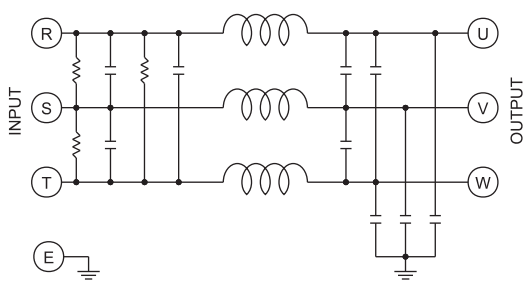


DIMENSIONS(UNITS : MM)

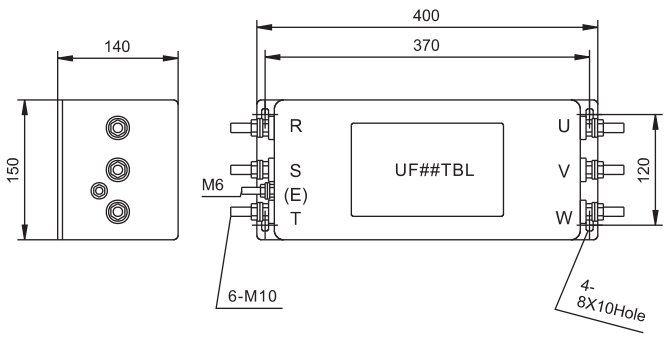

Tolerance : ± 1

6) TBL Series

A. NORMAL MODE

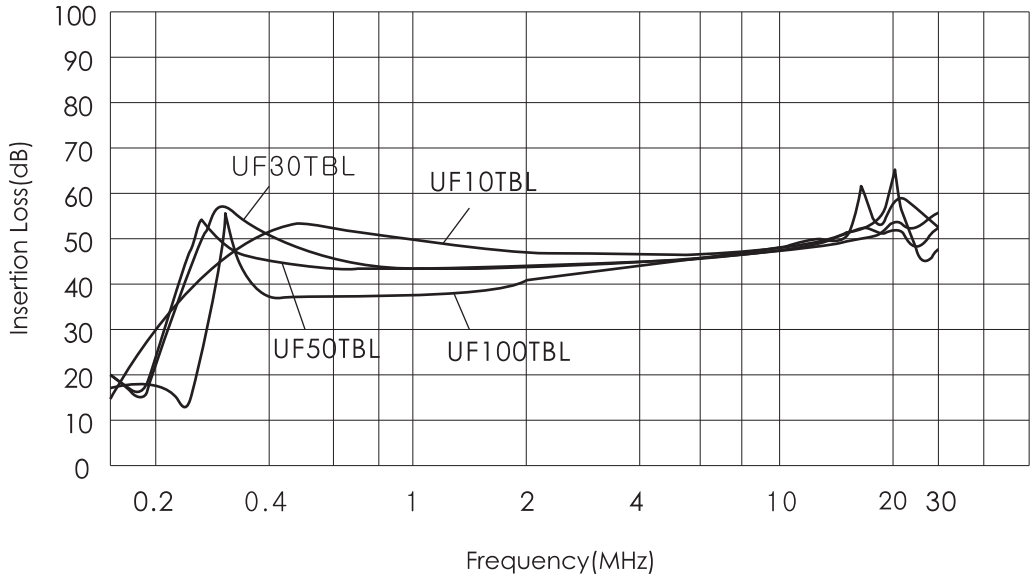

B. COMMON MODE

