

UV-C Sensor

GUVC-T20GD-U



Features


Aluminium Gallium Nitride Based Material
Schottky-type Photodiode
Photovoltaic Mode Operation
Good Solar Blindness



Applications

Pure UV-C Monitoring
Sterilization Lamp Monitoring

Outline Diagrams and Dimensions

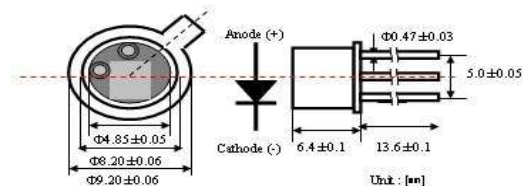


Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit	Remark
Storage Temperature	T_{st}	-40	90	$^{\circ}C$	
Operating Temperature	T_{op}	-30	85	$^{\circ}C$	
Reverse Voltage	$V_{r, max.}$		3	V	
Forward Current	$I_{f, max.}$		1	mA	
Soldering Temperature	T_{sol}		260	$^{\circ}C$	within 10 sec.


Characteristics (at 25 $^{\circ}C$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Dark Current	I_d			10	nA	$V_r = 0.1$ V
Photo Current	I_{ph}		5.3		μA	UVC Lamp, 1 mW/cm ²
Temperature Coefficient	I_{tc}		-0.07		%/ $^{\circ}C$	UVC Lamp
Responsivity	R		0.06		A/W	$\lambda = 254$ nm, $V_r = 0$ V
Spectral Detection Range	λ	210		280	nm	10% of R

Responsivity Curve

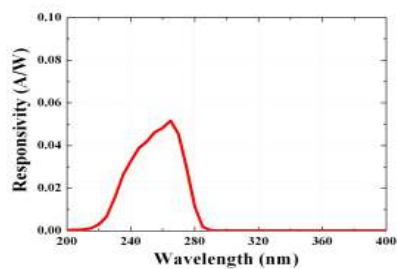

Photocurrent along UV Power

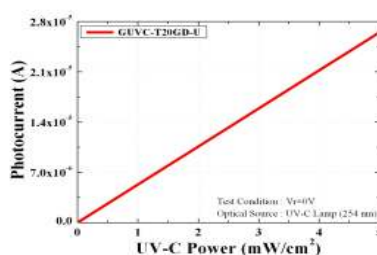

Caution