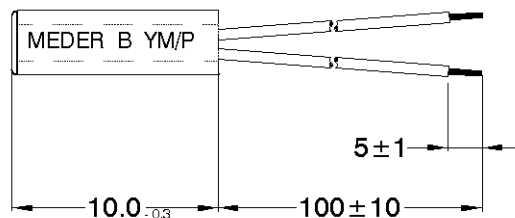

 $\varnothing 3.0 \pm 0.05$

MARKING / Aufdruck

 MEDER-label, Type
 Production code
 EN60062/Factory code

 MEDER-Logo, Typ,
 Produktionscode,
 EN60062/Betriebsstätte

ATTENTION / Achtung

 casing must not be
 loaded mechanically

 Sensorgehäuse darf nicht
 mechanisch belastet werden

CABLE / Kabel

 PVC-AWG30, 105°C, 30 V
 UL-Style1685 or 1692
 $\varnothing_{\max}$ 0.75 mm
 colour black

 PVC-AWG 30, 105°C, 30 V
 UL-Style1685 oder 1692
 $\varnothing_{\max}$ 0.75 mm
 Farbe schwarz

CIRCUIT DIAGRAM
 Schaltbild

 Abmessungen / dimensions (mm)
 Tolerances acc. to DIN ISO 2768-m

Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull-In	at 20°C	22		30	AT
Test equipment		KMS-03			

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact - No.		80			
Contact - form		A - NO			
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage	DC or Peak AC			30	V
Carry current	DC or Peak AC			0,5	A
Switching current	DC or Peak AC			0,5	A
Sensor-resistance	measured with 40% overdrive			280	mOhm
Housing material		PBT 30%GF			
Case colour		black			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature	cable not moved	-30		80	°C
Operating temperature	cable moved	-5		80	°C
Storage temperature		-30		80	°C
Reach / RoHS conformity		yes			

General data	Conditions	Min	Typ	Max	Unit
Mounting advice		over 5m cable, a resistor is recommended.			