
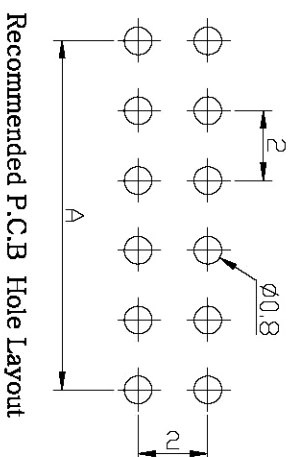
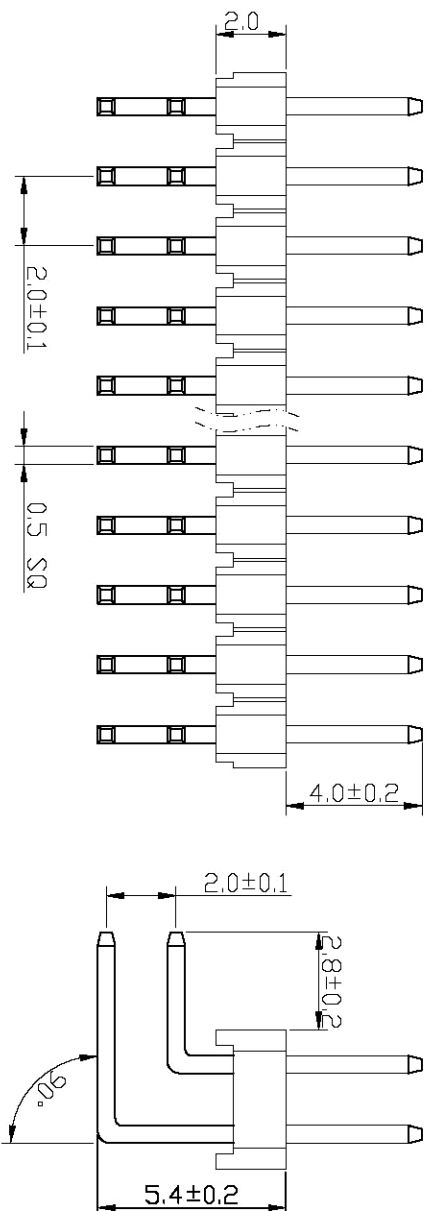


No. of DMMB NSIONS		1	2	3	4	5	6	7	8	9
Contact		A	B							
2	2.00	4.00								
3	4.00	6.00								
4	6.00	8.00								
5	8.00	10.00								
6	10.00	12.00								
7	12.00	14.00								
8	14.00	16.00								
9	16.00	18.00								
10	18.00	20.00								
11	20.00	22.00								
12	22.00	24.00								
13	24.00	26.00								
14	26.00	28.00								
15	28.00	30.00								
16	30.00	32.00								
17	32.00	34.00								
18	34.00	36.00								
19	36.00	38.00								
20	38.00	40.00								
21	40.00	42.00								
22	42.00	44.00								
23	44.00	46.00								
24	46.00	48.00								
25	48.00	50.00								
26	50.00	52.00								
27	52.00	54.00								
28	54.00	56.00								
29	56.00	58.00								
30	58.00	60.00								
31	60.00	62.00								
32	62.00	64.00								
33	64.00	66.00								
34	66.00	68.00								
35	68.00	70.00								
36	70.00	72.00								
37	72.00	74.00								
38	74.00	76.00								
39	76.00	78.00								
40	78.00	80.00								

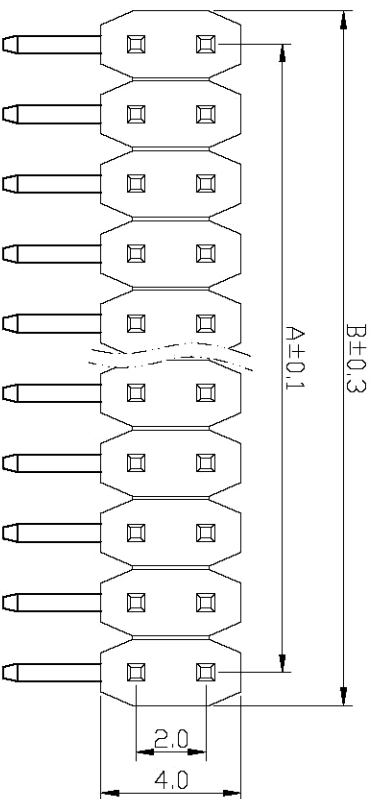

SPECIFICATIONS

Current Rating: 1.5Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 500V
Operation Temperature: -40°to+ 105°
Contact Material: Brass
Insulator Material: Polyester(UL 94V-0)
Standard: PBT

检验以此为准

UNLESS OTHERWISE SPECIFIED TOLERANCE		ANG	±5°	±0.3	±0.15	±0.05
SCALE		UNIT	mm			
DRAWN	李北林	18/01/08				
CHECKED						
APPROVED		/	/			
SIZE	A4	REV	A			
PRODUCT NO.						
PILE NAME:						