

RoHS

SPECIFICATIONS

CUSTOMER	
ITEM	CHOKE COIL
MODEL NO	
PART NO	S21-220K
CLASS	CLASS-A
SPECIFICATION	KT80-26

APPROVED

REQUEST CUSTOMER	SEO KWANG ELECTRONICS.
ADDRESS	KOREA : SEO KWANG ELECTRONICS 3508, Na-Dong, Jungang Circulation Complex, Guro 2-Dong, Guro-gu, Seoul, Korea TEL : 02-6679-3508

R o H S

SPECIFICATIONS			MODEL NO	
PART NAME	CHOKE COIL		PART NO	S21-220K

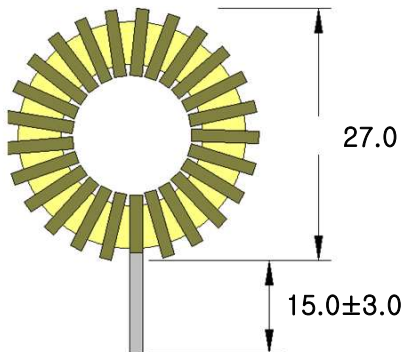
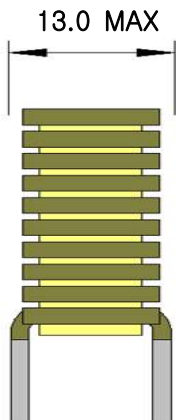




NO	DESCRIPTION	SPECIFICATION	QTY	LOCATION NO
1	CHOKE COIL	KT80-26	1	
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				

REV.	DATE	CONTENTS	PAGE	CHECKED
A	2019. 03. 20	- 신규제정		

			DESIGN	CHECK	APPROVAL	PAGE
						2 OF 4
REVISION NO	1					
	2		19.03.20		19.03.20	

CUSTOMER :

R o H S

SPECIFICATIONS			MODEL NO													
PART NAME	CHOKE COIL		PART NO	S21-220K												
1.DIMENSION (Unit : mm)																
																
2. CONNECTION. (BOTTOM VIEW)			3. WINDING SPEC													
			<table><tr><th rowspan="2">NO</th><th colspan="2">TERMINAL</th><th rowspan="2">WIRE</th><th rowspan="2">TURNS</th></tr><tr><th>S</th><th>F</th></tr><tr><td>L1</td><td>S</td><td>F</td><td>1.2 ϕ</td><td>22 (REF)</td></tr></table>		NO	TERMINAL		WIRE	TURNS	S	F	L1	S	F	1.2 ϕ	22 (REF)
NO	TERMINAL		WIRE	TURNS												
	S	F														
L1	S	F	1.2 ϕ	22 (REF)												
4. ELECTRICAL SPECIFICATION																
NO	ITEM	TERMINAL	SPECIFICATION	REMARKS												
1	INDUCTANCE	L1	22.0uH ± 20%	LCR METER at 1KHz.0.25V (HIOKI 3532)												
5. MATERIALS LIST																
NO	COMPONENT	MATERIAL	MANUFACTURER OF COMPONENT	UL FILE NO												
1	CORE	KT80-26	ZHEJIANGKEDA MAGNETOELECTIRICITY CO.,LTD or equive.													
3	WIRE	UEW 1.2 ϕ	JIANGSU DARTONG M&E CO.,LTD(MW75-C) YOUNG HWA PRODUCTION CO LTD(MW75-C) MIRAE ELECTRON CO LTD (MW75) or equive.	E237377 E141925(S) E209736												
			DESIGN	CHECK	APPROVAL	PAGE										
						3 OF 4										
REVISION NO	1		19.03.20		19.03.20											
	2															

CUSTOMER :

R o H S

SPECIFICATIONS		MODEL NO																																																
PART NAME	CHOKE COIL	PART NO	S21-220K																																															
※ UL FILE																																																		
YELLOW CARD																																																		
WIRE	<p>YOUNG HWA PRODUCTION CO LTD E141925</p> <p>NAMDONG INDUSTRIAL COMPLEX</p> <p>83 BLK. 20 LOT</p> <p>NAMDONG-KU</p> <p>INCHON. 405-330 REPUBLIC OF KOREA</p>																																																	
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Mtl Dsg</th> <th colspan="2">Coat Typ</th> <th rowspan="2">ANSI Type (+)</th> <th rowspan="2">TI</th> </tr> <tr> <th>BC</th> <th>OC</th> </tr> </thead> <tbody> <tr> <td>AEW-R</td> <td>Modified Polyester</td> <td>Polyamide-imide</td> <td>MW73-C</td> <td>200</td> </tr> <tr> <td>AI-EIW</td> <td>Modified Polyester</td> <td>Polyamide-imide</td> <td>MW35-C</td> <td>200</td> </tr> <tr> <td>NPW</td> <td>Polyester-nylon</td> <td>Nylon</td> <td>MW24-C</td> <td>155#</td> </tr> <tr> <td>NUW</td> <td>Polyurethane-nylon</td> <td>Nylon</td> <td>MW28-C</td> <td>130#</td> </tr> <tr> <td>PEW-F</td> <td>Polyester</td> <td>—</td> <td>MW5-C</td> <td>155</td> </tr> <tr> <td>UEW-B</td> <td>Polyurethane</td> <td>—</td> <td>MW75-C</td> <td>130#</td> </tr> <tr> <td>UEW-F</td> <td>Polyurethane</td> <td>—</td> <td>MW79-C</td> <td>155</td> </tr> <tr> <td>YHW-B</td> <td>Polyurethane</td> <td>—</td> <td>MW75-C</td> <td>130</td> </tr> </tbody> </table> <p>Marking: Company name and material designation. Last Updated on 2007-08-08</p>			Mtl Dsg	Coat Typ		ANSI Type (+)	TI	BC	OC	AEW-R	Modified Polyester	Polyamide-imide	MW73-C	200	AI-EIW	Modified Polyester	Polyamide-imide	MW35-C	200	NPW	Polyester-nylon	Nylon	MW24-C	155#	NUW	Polyurethane-nylon	Nylon	MW28-C	130#	PEW-F	Polyester	—	MW5-C	155	UEW-B	Polyurethane	—	MW75-C	130#	UEW-F	Polyurethane	—	MW79-C	155	YHW-B	Polyurethane	—	MW75-C	130
	Mtl Dsg	Coat Typ			ANSI Type (+)	TI																																												
		BC	OC																																															
	AEW-R	Modified Polyester	Polyamide-imide	MW73-C	200																																													
	AI-EIW	Modified Polyester	Polyamide-imide	MW35-C	200																																													
	NPW	Polyester-nylon	Nylon	MW24-C	155#																																													
	NUW	Polyurethane-nylon	Nylon	MW28-C	130#																																													
	PEW-F	Polyester	—	MW5-C	155																																													
	UEW-B	Polyurethane	—	MW75-C	130#																																													
UEW-F	Polyurethane	—	MW79-C	155																																														
YHW-B	Polyurethane	—	MW75-C	130																																														
<p>MI RAE ELECTRON CO LTD E209736</p> <p>955 GOYANG-RI</p> <p>WOLGOT-MYUN</p> <p>GIMPO-SI, GYEONGGI-DO 415-</p> <p>871 REPUBLIC OF KOREA</p>																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Mtl Dsg</th> <th rowspan="2">Mark Dsg</th> <th colspan="2">Coat Typ</th> <th rowspan="2">ANSI Type</th> <th rowspan="2">Temp Class</th> </tr> <tr> <th>BC</th> <th>OC</th> </tr> </thead> <tbody> <tr> <td><u>UEW</u></td> <td>-1</td> <td><u>Polyuretha</u></td> <td><u>None</u></td> <td>MW79</td> <td>155</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>MW75</td> <td>130(2)</td> </tr> <tr> <td>PEW</td> <td>-1</td> <td>Polyester</td> <td>None</td> <td>MW30</td> <td>180</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>MW5</td> <td>155(2)</td> </tr> <tr> <td>EIW</td> <td>-1</td> <td>Polyester-</td> <td>None</td> <td>MW74</td> <td>200</td> </tr> </tbody> </table>			Mtl Dsg	Mark Dsg	Coat Typ		ANSI Type	Temp Class	BC	OC	<u>UEW</u>	-1	<u>Polyuretha</u>	<u>None</u>	MW79	155					MW75	130(2)	PEW	-1	Polyester	None	MW30	180					MW5	155(2)	EIW	-1	Polyester-	None	MW74	200										
Mtl Dsg	Mark Dsg	Coat Typ			ANSI Type	Temp Class																																												
		BC	OC																																															
<u>UEW</u>	-1	<u>Polyuretha</u>	<u>None</u>	MW79	155																																													
				MW75	130(2)																																													
PEW	-1	Polyester	None	MW30	180																																													
				MW5	155(2)																																													
EIW	-1	Polyester-	None	MW74	200																																													
<p>JIANGSU DARTONG M & E CO LTD E237377</p> <p>1 DARTONG RD</p> <p>HUAJIAN ECONOMY DEVELOPMENT ZONE</p> <p>HUAJIAN, JIANGSU 223238 CHINA</p>																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Material Designation</th> <th>Mark Dsg</th> <th>Base Coat</th> <th>Top Coat</th> <th>ANSI Type</th> <th>Temp Class</th> </tr> </thead> <tbody> <tr> <td>xPEW/NY</td> <td>xPEW/NY</td> <td>Polyester</td> <td>Polyamide</td> <td>MW 76-C</td> <td>180</td> </tr> <tr> <td></td> <td></td> <td>Polyester</td> <td>Polyamide</td> <td>MW 24-C</td> <td>155[#]</td> </tr> <tr> <td>xUEW</td> <td>xUEW</td> <td>Polyurethane</td> <td>-</td> <td>MW 79-C</td> <td>155</td> </tr> <tr> <td></td> <td></td> <td>Polyurethane</td> <td>-</td> <td>MW 75-C</td> <td>130</td> </tr> </tbody> </table>			Material Designation	Mark Dsg	Base Coat	Top Coat	ANSI Type	Temp Class	xPEW/NY	xPEW/NY	Polyester	Polyamide	MW 76-C	180			Polyester	Polyamide	MW 24-C	155[#]	xUEW	xUEW	Polyurethane	-	MW 79-C	155			Polyurethane	-	MW 75-C	130																		
Material Designation	Mark Dsg	Base Coat	Top Coat	ANSI Type	Temp Class																																													
xPEW/NY	xPEW/NY	Polyester	Polyamide	MW 76-C	180																																													
		Polyester	Polyamide	MW 24-C	155[#]																																													
xUEW	xUEW	Polyurethane	-	MW 79-C	155																																													
		Polyurethane	-	MW 75-C	130																																													
REVISION NO		1	DESIGN	CHECK	APPROVAL	PAGE																																												
		2	19.03.20	19.03.20	19.03.20	4 OF 4																																												
		