

100S Series



100W 1-Channel


- **5V20A/12V8.3A/15V6.6A
24V4.1A/36V2.7A/48V2A
Output**
- **Wide Input Voltage Range
(AC85-264V)**
- **Built-in Inrush Current
Limiter, Over Current
Protector and Over
Voltage Protector**
- **Over Temperature
Protection**
- **Auto-Restart Mode**
- **Approved by EN 60950-1 CE**

SPECIFICATIONS


Item		UP100S05	UP100S12	UP100S15	UP100S24	UP100S36	UP100S48
INPUT	VOLTAGE	same as UP150S05	AC85~264V			2.5A typ (ACIN 110V, Io=100%) 1.4A typ (ACIN 220V, Io=100%)	
	FREQUENCY	50/60Hz(47~63Hz)					
	EFFICIENCY (NOTE)	78% Typ	80% Typ	80% Typ	82% Typ	83% Typ	85% Typ
	INRUSH CURRENT	20A Typ(ACIN 110V, Io=100%)/40A Typ(ACIN 220V, Io=100%) at cold start					
OUTPUT	VOLTAGE [V]	5	12	15	24	36	48
	CURRENT [A]	20.0	8.3	6.6	4.1	2.7	2.0
	LINE REGULATION [mV]	25 Max	60 Max	75 Max	120 Max	180 Max	240 Max
	LOAD REGULATION [mV]	50 Max	120 Max	150 Max	240 Max	360 Max	480 Max
	RIPPLE [mVp-p]	50 Max	120 Max	150 Max	240 Max	360 Max	480 Max
	RIPPLE NOISE [mVp-p]	100 Max	170 Max	200 Max	290 Max	410 Max	530 Max
	TEMPERATURE DRIFT,0-50℃ [mV]	50 Max	120 Max	150 Max	240 Max	360 Max	480 Max
	RISE TIME [msec]	600 Max (ACIN 85V, Io=100%)					
	HOLDING TIME [msec]	15 Typ(ACIN 85V, Io=100%)					
PROTEC-TION	OVER CURRENT PROTECTION	Works at over 110% of rating and recovers automatically					
	OVER VOLTAGE PROTECTION	Works at 115~140% of rating					
ISOLAT-ION	INPUT-OUTPUT	AC3,000V for 1 minute, DC500V 100Mohm (At room temp. & humid.)					
	INPUT-CASE, FG	AC1,500V for 1 minute, DC500V 100Mohm (At room temp. & humid.)					
	OUTPUT-CASE	AC500V for 1 minute, DC500V 100Mohm (At room temp. & humid.)					
ENVIRON-MENT	OPERATING TEMP. & HUMID.	-10~+50℃, 20~90%RH(Non condensing)					
	STORAGE TEMP. & HUMID.	-20~+75℃, 20~90%RH(Non condensing)					
	VIBRATION	10~55Hz at 1G 3 minutes period, 30 minutes along X, Y and Z axis					
	IMPACT	10G for 20 msec, Once on each X, Y and Z axis					
	APPROVALS	CE	CE	CE	CE		

100S Series

BLOCK DIAGRAM

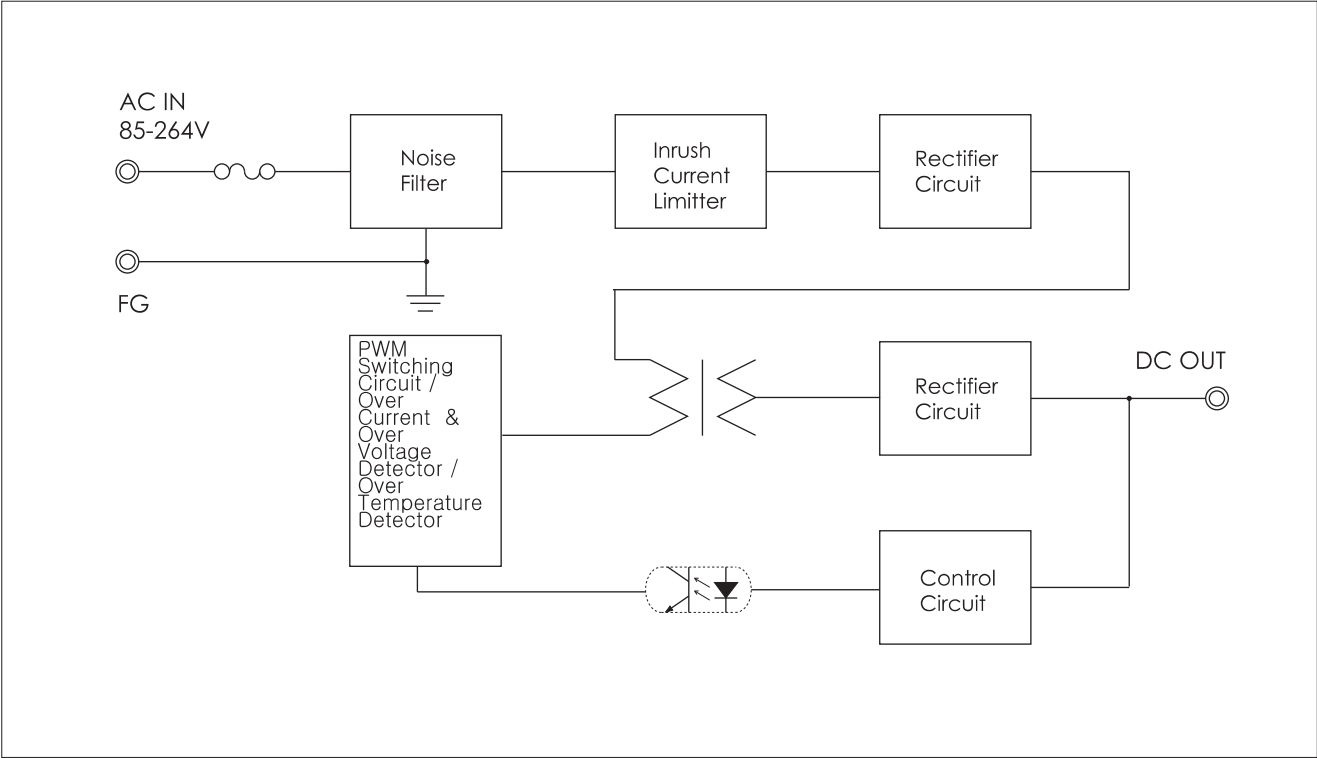


DIMENSIONS(UNITS : MM)

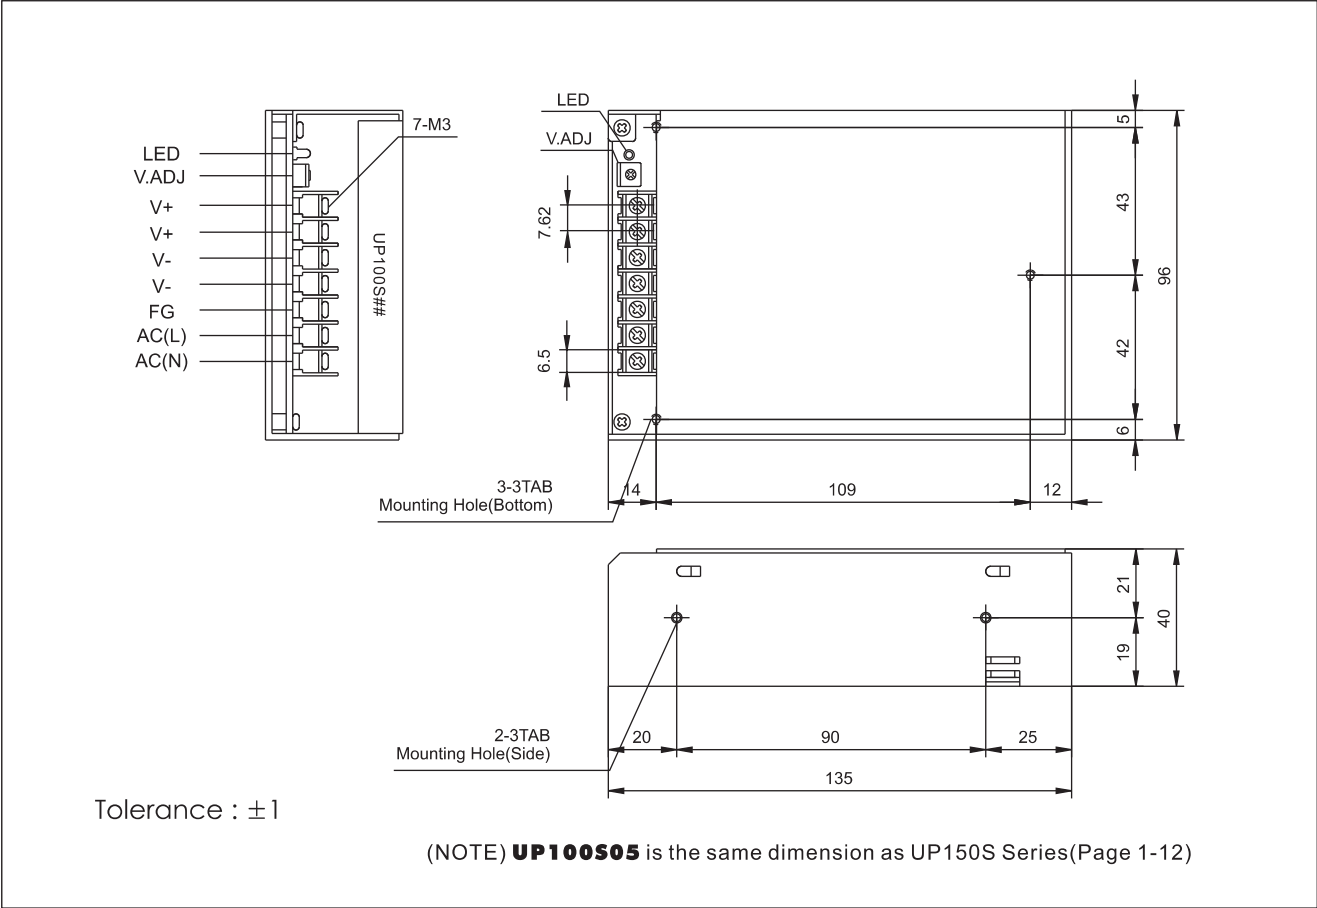


5. 100S/100SN Series(100S05)


A. OVER CURRENT CHARACTERISTICS

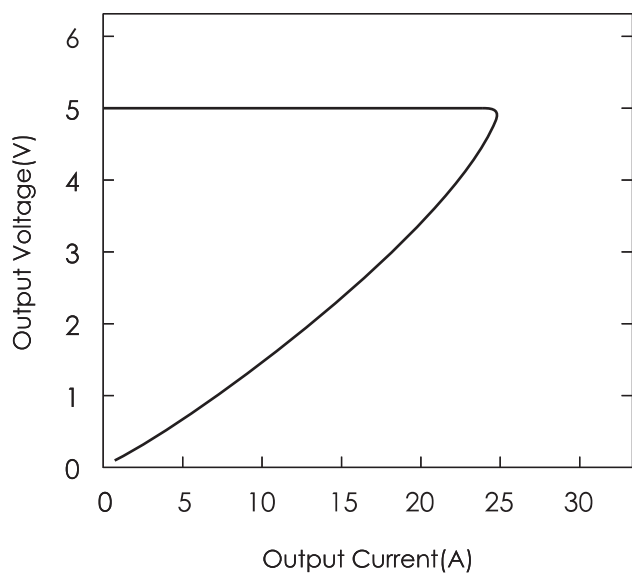


B. DERATING CHARACTERISTICS

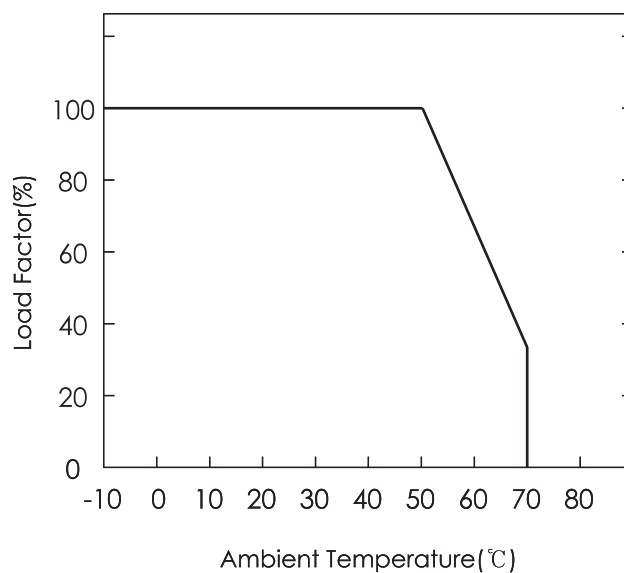

C. EFFICIENCY CHARACTERISTICS

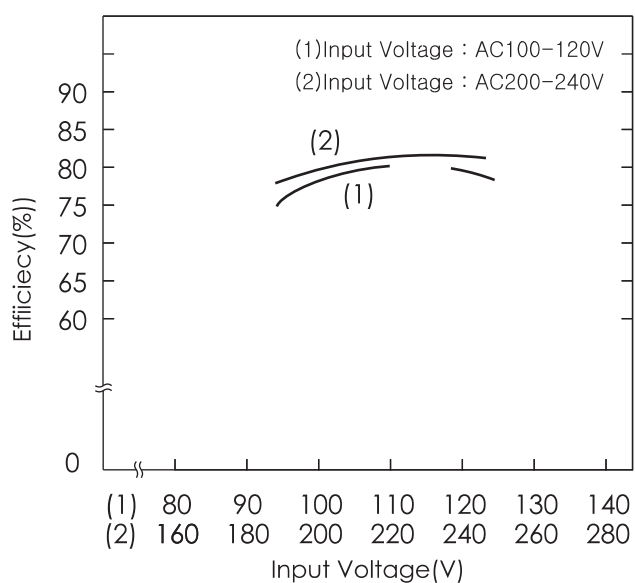

D. RISING/FALLING TIME CHARACTERISTICS

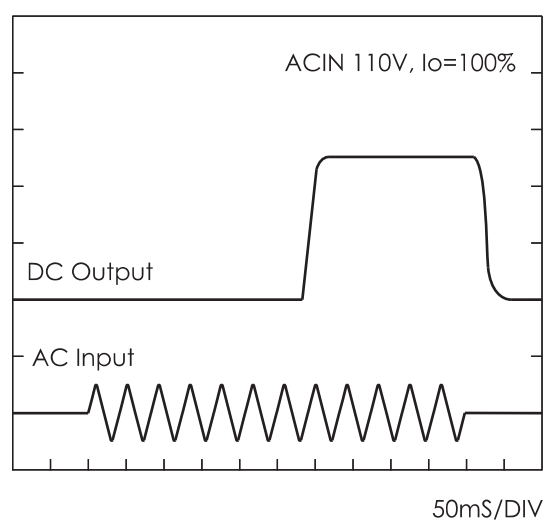

BRACKET

MODEL	APPLICATION	DIMENSIONS(UNIT:mm)
BRACKET-A	15S Series 30S Series 50S Series 75S Series 100S Series 150S Series 200S Series 220S Series 15D Series 30D Series 50D Series 15T Series 30T Series 50T Series	<p>Technical drawing of Bracket-A. The top view shows a rectangular plate with a total width of 60mm and a total length of 70mm. It features five mounting holes. The first hole is located 5mm from the left edge and 10mm from the top edge. The subsequent four holes are spaced 10mm apart horizontally and 5mm apart vertically. The last hole is 5mm from the right edge and 10mm from the top edge. The plate has a thickness of 1.6mm. The side view shows a profile with a total height of 5.5mm and a base width of 70mm.</p>
BRACKET-B	300S Series 400S Series	<p>Technical drawing of Bracket-B. The top view shows a rectangular plate with a total width of 86mm and a total length of 98mm. It features five mounting holes. The first hole is located 6mm from the left edge and 15mm from the top edge. The subsequent four holes are spaced 12.5mm apart horizontally and 5mm apart vertically. The last hole is 6mm from the right edge and 15mm from the top edge. The plate has a thickness of 1.6mm. The side view shows a profile with a total height of 6.5mm and a base width of 98mm.</p>
BRACKET-C	500S Series 600S Series 650S Series 750S Series 850S Series 1000S Series 1200S Series 1500S Series	<p>Technical drawing of Bracket-C. The top view shows a rectangular plate with a total width of 118mm and a total length of 130mm. It features five mounting holes. The first hole is located 6mm from the left edge and 20mm from the top edge. The subsequent four holes are spaced 13.5mm apart horizontally and 7.5mm apart vertically. The last hole is 6mm from the right edge and 20mm from the top edge. The plate has a thickness of 1.6mm. The side view shows a profile with a total height of 6.5mm and a base width of 130mm.</p>

C E R T I F I C A T E



of Conformity
Low Voltage Directive 73/23/EEC
as last amended by EEC Directive 93/68/EEC

Registration No.: AN 50018421 0001

Report No.: 13001020 001

Holder: Union Elecom Co., Ltd.
34-2, Samjeong-dong, Ojeong-gu
Bucheon, Gyeonggi-do 421-150
Rep. of Korea

Product: Schaltnetzteil
Switching Mode Power Supply

Identification: Type Designations : UP100S**
** stand for 05,12,24
UP150S**
** stand for 05,12,15,24
Serial Nos. : N.A. (Prototypes)

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with all revision of Annex I of Council Directive 73/23/EEC, in its latest amended version, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate in connection with the EC declaration of conformity according to Annex III of the Directive.



Certification Body

Cologne, 16.10.2002

Löffler
Dipl.-Ing. D. Löffler

TÜV Rheinland Product Safety GmbH - Am Grauen Stein - D-51105 Köln

CE The CE marking may be used if all relevant and effective EC Directives are complied with. CE